

Sears

CRAFTSMAN®

...WHERE AMERICA SHOPS

1978-79 POWER AND HAND TOOL CATALOG



INDEX ON PAGE 70

Last date to order from this catalog is July 31, 1979

SEARS, ROEBUCK AND CO.

Satisfaction Guaranteed or Your Money Back

GT

Please mention the key-letter at left when ordering by phone from this catalog

IT'S SO EASY TO SHOP BY PHONE FROM ANY SEARS CATALOG

Just call Sears and say you want to place a catalog order

You can also apply by phone for a Sears Credit Card to make Sears Catalog or Retail shopping easier yet




YOU CAN DO IT

... with Craftsman® Power and Hand Tools. Now's the time to become the home handyman you've always wanted to be. You'll be surprised at the projects you can tackle... auto repairs, furniture and cabinet making, plumbing, home remodeling—the list goes on and on. Look for the "You Can Do It" logo throughout this catalog for just a few glimpses of what you can do with Craftsman tools.

Have a job that needs to be done? Then why not give it a try. Only by "doing it yourself" can you experience the feeling of accomplishment that comes from completing a job with your own two hands. All it takes is a little know-how and you can do it!

Have a specific project in mind? Be sure to see our selection of helpful "how-to" instruction manuals on page 71.

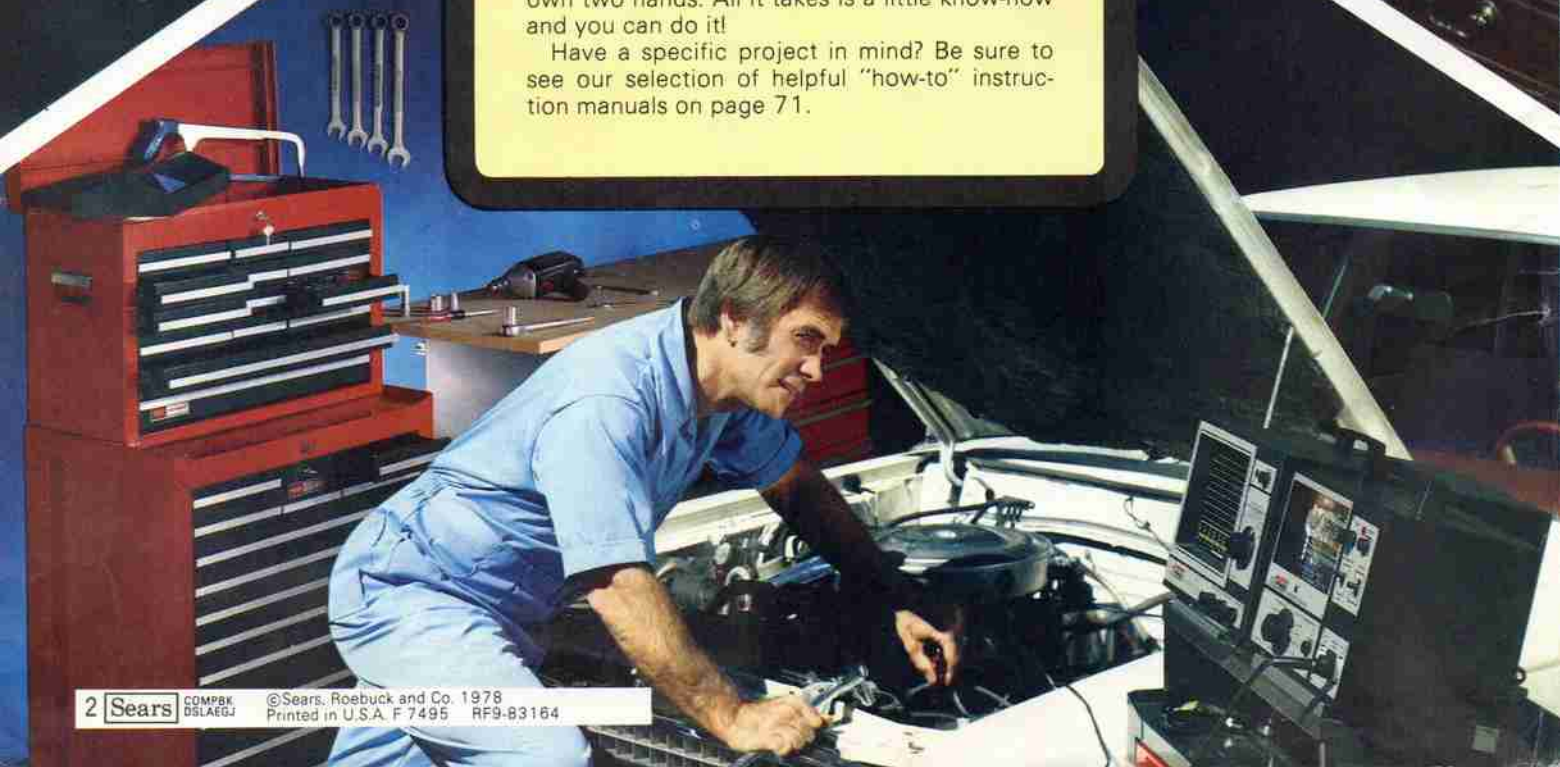

Our complete selection of
CRAFTSMAN® tools...

IT'S 9 SHOPS IN 1

With all the tools we offer here, there should be no need to look further than Sears for your workshop needs. And to help you find the right tool for the job, we've divided the book into specialty shops

It all begins with work and storage space. Sears benches and cabinets give you both.
Pages 4-7.



Bench saws, sanders, planers, drill presses and accessories for the handyman and professional.
Pages 8-32.



Everything you'll need to cut, turn, grind or weld metals. Choose the equipment right for you.
Pages 33-43.



Leaky faucets, plugged drains, burst pipes... Sears plumbing tools can help you with repairs.
Pages 44-47.



New! Add your own creative touch. We've got the supplies for making your own decorator frames.
Pages 48 and 49.



A complete selection of hand drills, saws, routers and more... plus accessories for job versatility.
Pages 58-82.



Wiring problems? Sears testers and analyzers help you find them. Our tools and fixtures help you fix them.
Pages 86-89.



Discover the choice of many professionals. Air tools are compact yet powerful and quick.
Pages 96-105.



Durability and precision make these tools a must for the serious mechanic at home or in the shop.
Pages 106-139.





Work
Storage
Shop



Only at Sears... CRAFTSMAN® Work Buddy™ Workbench

Heavy-duty workbench/vise grips large, awkward pieces, adjusts to 5 working heights and needs less than half the storage space as our portable workbench below

\$58¹⁹



Vise jaws can hold your pipe clamps to grip oversized pieces and for strong, four-sided clamping action

Open-leg design allows chair to fit beneath table so you can even use it as a sewing or typing table

Remove legs and place in tray for compact storage. Sits on shelf, hangs on wall, stores just about anywhere

TOP, FRAME: 1-in. thick laminated hardboard top sealed to resist chipping, marring. Die-cast aluminum frame provides firm support. Telescoping tubular steel legs adjust to 5 positions from 23 to 35 in. high for a comfortable working height. . . . table can even be set on an angle. Legs are widely spaced for stability.

WISE: Jaws open to 5 1/4 in. wide. Double-adjustment levers permit gripping of wedge-shaped objects. Four rectangular swivel pegs hold irregular or circular-shaped pieces. Four V-notched swivel pegs hold tubular pieces, even in vertical position.

DIMENSIONS, CAPACITY: Legs detach, fit in storage tray that can also hold tools while table is in use. Folds away to 30x18x5 1/4 in. high. Needs only 1.64 cu. ft. of storage space (portable work center below needs 3.77 cu. ft.) Work table is 15 1/4 in. wide with vise open, 10 in. wide with vise closed. Capacity using swivel clamps is 12 in. when work is held parallel to clamps. Weighs only 32 pounds. Supports maximum of 350 pounds.

ORDERING INFORMATION: Partly assembled. Use clamps (9) and (10) sold on page 50.

9 GT 28877C—Wt. 35 lbs. . . \$58.19

CRAFTSMAN® Portable Workbench

Workbench, sawhorse, vise in one



\$67⁸⁸

Ideal for apartment dwellers and other home craftsmen with limited space.

TOP, FRAME: Pressed flakeboard top. Steel frame. Base level step can be used as footrest for stability.

WISE: Jaws open to 5 inches wide. Double-adjustment levers permit gripping of wedge-shaped objects. Four swivel pegs hold irregular or circular-shaped pieces. V-grooves in vise jaws hold tubular pieces such as pipe, even in vertical position.

DIMENSIONS, CAPACITY: Height of work surface is 31 3/8 inches with legs open, 23 3/8 inches with legs closed. Folds away to 29 1/2 x 29 x 7 3/8 inches high. Work table is 15 1/4 inches wide with vise open, 9 3/4 inches wide with vise closed. Capacity using two swivel clamps is 12 inches when work is held parallel to clamps, 28 inches when held diagonally. Lightweight and easy to carry. . . . weighs only 32 pounds. Supports maximum of 350 pounds. Imported.

ORDER INFO: See "N" suffix, p. 69.
9 GT 28876N—Wt. 37 lbs. . . \$67.88

Workbench/Storage Components

Buy these components separately or together in complete 3-piece outfit



Bench Unit with
48-in. wide top
\$74⁹⁹

Bench Unit with
24-in. wide top
\$44⁹⁹

Corner Unit
\$16⁹⁹

Save 10% when you buy
all 3 units (1 thru 3)

Separate prices
total \$136.97 **\$123.27**



(1 and 2) Free-standing Stationary Workbenches

TOP, FRAME: 1-inch thick industrial-grade particle board top. Steel frame. Knockouts on front legs for electrical outlets. 72 inches high overall.

STORAGE: Cabinets 24x18x5 in. deep, each with 2 adjustable steel shelves. Sliding doors of see-thru, smoke-colored plastic. Perforated hardboard backstop and side panel inserts for hanging tools. 10-in. deep bottom shelf.

SIZES, ORDERING INFO: Unassembled. Order hook set at bottom of page.

(1) 48-in. Unit. Work surface 48 in. wide, 20 in. deep. Includes 2 cabinets, drawer 12x3x8 in. deep, adjustable tool rack.
9 GT 1433N—Wt. 95 lbs. . . . \$74.99

(2) 24-in. Unit. Work surface 24 in. wide, 20 in. deep. Incl. one cabinet. Wt. 61 lbs.
9 GT 1432L . . . \$44.99

Extra Drawers for (1) and (2) above. Steel. 12x3x18 inches deep.
9 GT 1438—Shipping weight 3 pounds . . . \$4.49

(3) **Corner Unit.** 4-sq. ft. of work surface plus space for hanging tools. Same top as (1) and (2). Perforated hardboard backstop fastens at 90° angle.
ORDER INFO: Unassembled. Must be mounted between 2 stationary units.
9 GT 1434L—Shipping weight 35 pounds . . . \$16.99

(1 thru 3) **Complete 3-piece Stationary Workbench Outfit**
9 GT 14321N3—Shipping weight 191 pounds . . . Outfit \$123.27

Portable Roll-about Workshop



\$52⁹⁹

Cabinet, drawer and tool rack all on convenient, portable frame.

TOP, FRAME: 20x30x3/4-inch thick industrial-grade particle board top. Two hinged 9-inch wide side drop panels expand work surface from 30 inches wide to 39 or 48 inches wide. Steel. Legs mounted on 2 1/2-inch casters that can be locked in place. Knockouts on front legs permit mounting of electrical outlets. 62 inches high overall.

STORAGE: Cabinet 30x10x5 in. deep. Sliding doors of see-thru, smoke-colored plastic. Drawer 12x3x18 in. deep. Perforated hardboard side panels cover legs and back-braced top panel for hanging tools. 10-in. deep bottom shelf. Tool rack has removable drill bit holder.

ORDER INFO: Unassembled. Order hook set sold below.
9 GT 1437L—Wt. 68 lbs. . . \$52.99

30-piece Pegboard Fixture Kit (not shown). Includes spacers and screws. Fit 1/8 or 1/4-in. pegboard.

Shipping weight 1 lb. 4 oz.
9 GT 75631 . . . Kit \$3.22

New at Sears... Workspace

Enjoy a workshop, repair, hobby or study center even where space is limited. Table sets-up in seconds, folds for compact storage



Push-button key lock for security

Full-length piano-hinge for strength

Adjustable leveling feet for firm support

Stands only 7 inches from wall when closed



Hobby table with standard cabinet

\$129⁹⁵

Workbench, vise, standard cabinet

\$179⁹⁵

Workbench with vise and deluxe cabinet

\$214⁹⁵

Tray and Hook Kit for (3)

\$14⁹⁵

HOW IT WORKS: Cabinet mounts to any stud wall (hardware included) for left or right side door opening. Folding table attaches to cabinet. To use, just push lockable door catch, open door, release table latch and lower table.

CABINETS: Heavy-gauge steel with baked enamel finish. Push-button key lock with 2 keys. Full-length piano hinge helps reduce chance of bowing. Rubber door gasket provides tight seal. Pegboard covers entire door area. Standard cabinet measures 52x26 inches wide, deluxe cabinet measures 78x26 inches wide. Cabinets project only 7 inches from wall when closed.

TABLES: Aluminum legs with adjustable levelers fold for storage. Spring latch holds table in place. Hobby table has mar-resistant phenolic top laminated to 3/4-inch thick premium grade plywood. Edge moulding helps reduce chipping. Measures 42x23 3/4 inches wide. Workbenches have 1-inch thick laminated birch top bonded with phenolic resin for strength. 24-inch wide vise jaws are grooved to hold round objects up to 2 inches in diameter. Vise capacity is 6 inches, expands to 36 inches with bar clamps (included). Measure 41x23 3/4 inches wide.

TYPES, ORDERING INFORMATION: See "N" suffix on page 69. Partially assembled. Tools and supplies not included.

(1) **Hobby table with standard cabinet.** Use for hobby work, studying, sewing and even gardening. Helps to organize needed items; spend less time looking for misplaced items. Order hook set below.

9 GT 10292N2—Shipping weight 90 pounds \$129.95

(2) **Workbench with vise and standard cabinet.** Keeps needed tools within easy reach. Order hook set below.

9 GT 10293N2—Shipping weight 107 pounds \$179.95

35-piece Hook Set (not shown). For items (1) and (2) above.

9 GT 10245—Shipping weight 13 ounces Set \$4.50

(3) **Workbench with vise and deluxe cabinet.** Provides plenty of room to store your tools. Order tray and hook kit below.

9 GT 10294N2—Shipping weight 132 pounds \$214.95

(4) **Tray and Hook Kit for (3) above.** Includes 35 assorted hooks and two 23x6-inch deep trays for holding large items.

9 GT 10246C—Shipping weight 9 pounds Kit \$14.95

CRAFTSMAN® Woodworkers' Bench

Top, legs and braces made of solid, kiln-dried selected maple . . . with 78 1/2-inch clamping capacity

\$299⁹⁵

CONSTRUCTION: Solid maple table, legs, crossbraces. Steel vise handles, screws, guide rods. 37x75x33 inches high overall.

WORK SURFACE: 15 1/2 x 70 in. long. Four dogs hold two 15 1/2-in. long maple clamping bars in place. Dogs fit into 14 pairs of holes 4 1/2 in. apart on table top, vise. 78 1/2-in. clamping cap.

END VISE: Reinforced solid maple jaws. 3x5 1/2 inch face. Two guide rods. 10 1/2-inch capacity.

SIDE VISE: Maple shoulder design secures workpieces for chiseling, carving, planing and sanding. 5 3/4-inch capacity.

TOOL TRAY: Maple. 34x8 1/4 x 2 inches deep. Mounts on side or end of table.

DRAWERS: Two maple drawers with press-board bottoms. Each 14x3 1/2 x 9 1/2 in. wide.

LEGS: Maple. Trestle style with crossbraces. Table end with side vise has leg with four supports for lateral stability.

ORDERING INFO: Partially assembled. T9 GT 10231N—Wt. 175 lbs. \$299.95

Workbench Stool with back (not shown). 16-ga. steel frame and back, pressboard seat. Seat 26 in. high, 37 in. high overall. Gray.

ORDERING INFO: If mailed, takes 15 lb. rate; see Parcel Post Information on page 69. 9 GT 10286L—Shpg. wt. 14 lbs. \$28.99




Side vise grips tight for planing and shaping

Top resists warping from uneven stress

COMPK DS LAEG **Sears** 5

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

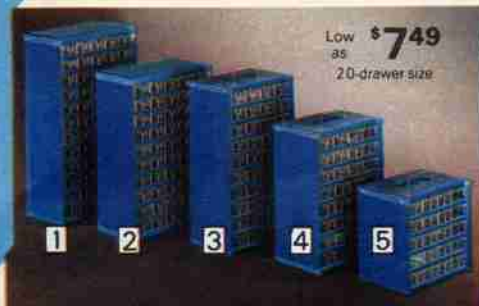

Low
as
\$749
20-drawer size

No. of Drawers	Dimensions LxWxH in.	No. of Dividers	Catalog Number	Wt. lbs. oz.	Price each
(1) 60	11 $\frac{1}{4}$ x6 $\frac{1}{4}$ x20 $\frac{3}{4}$	30	9 GT 65357	13 2	\$14.75
(2) 50	11 $\frac{1}{4}$ x6 $\frac{1}{4}$ x17 $\frac{3}{4}$	24	9 GT 65352	11 5	12.75
(3) 40	9 $\frac{3}{4}$ x6 $\frac{1}{4}$ x17	18	9 GT 65349	9 2	10.75
(4) 32	9 $\frac{3}{4}$ x6 $\frac{1}{4}$ x13 $\frac{3}{4}$	18	9 GT 65355	7 7	8.99
(5) 20	9 $\frac{3}{4}$ x6 $\frac{1}{4}$ x9	12	9 GT 65348	4 13	7.49

Dividers (not shown). For organizers (1 thru 5) above.
9 GT 65315—Pkg. of 20. Shpg. wt. 3 oz. Pkg. 45c

Standing Organizers

FRAME: Metal sides with plastic top and bottom. Baked blue enamel finish. Handle on top of 20, 32 and 40-drawer units.

DRAWERS: Clear plastic. Measure 2 $\frac{1}{4}$ x5 $\frac{3}{4}$ x1 $\frac{1}{4}$ inches deep.

SIZES. ORDERING INFORMATION: Order from chart at right. Order extra dividers at right.

(6 and 7) Shelf Organizers


3-shelf unit \$12⁹⁹ | 2-shelf unit \$26⁹⁹

CONSTRUCTION: Steel frame, shelves. Gray enamel finish. Shelves 28 $\frac{1}{2}$ x7 in. wide. See-thru plastic drawers 2 $\frac{1}{4}$ x5 $\frac{3}{4}$ in. long. Large drawers 2 in. deep, small drawers 1 $\frac{1}{4}$ in. deep. Measures 30x7x22 $\frac{1}{2}$ inches high overall.

ORDERING INFO: Unassembled.

(6) Unit with 3 shelves, 20 drawers. Includes 10 small, 10 large drawers. Adjustable center shelf.
9 GT 65347C—Wt. 13 lbs. . . . \$12.99

(7) Unit with 2 shelves, 50 drawers. Incl. 30 small, 20 large drawers.
9 GT 65356C—Wt. 22 lbs. . . . \$26.99

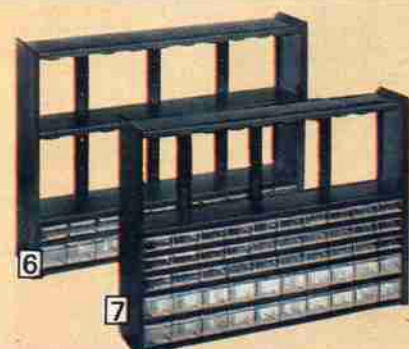

(8) Shelf-style Workbench

CONST: Flakeboard top, 2x5 ft., 1 in. thick. 16-ga. steel legs. Baked charcoal gray enamel finish. 32 $\frac{1}{2}$ in. high. Holds 2 drawers (9 GT 10326) sold on page 32.

ORDER INFO: Unassembled. See "N" suffix, page 69. Wt. 69 lbs.
9 GT 10279N \$45.99

(9) Crossbraced Bench Legs

Priced \$4.62 less than in our 1977-78 Power Tool Book.
CONST: 18-ga. steel. Legs 32 in. high, crossbraces 20 $\frac{3}{4}$ in. long.

ORDER INFO: Unassembled. Wt. 18 lbs. 1977-78 Power Tool Book price \$19.50.

9 GT 1022C Set \$14.88

(10) All-steel Workbench

CONST: 12-ga. steel. Enamel finish. 29 in. wide, 33 $\frac{1}{2}$ in. high. Legs can hold conduit, electrical outlet.

ORDER INFO: Unassembled. See Shpg. Note below.

F9 GT 10281N—5-ft. long top. Wt. 103 lbs. . . \$85.99

F9 GT 10282N—6-ft. long top. Wt. 131 lbs. . . 95.99

(11 and 12) Steel Drawers for (10). Steel frame. 23 $\frac{3}{4}$ x15x6 $\frac{1}{4}$ in. deep. Latch, padlock hasp, hardware.

ORDERING INFO: See Shipping Note below.

(11) Mounts to workbench frame only.

F9 GT 10283—Shpg. wt. 29 lbs. . . . Each \$35.99

(12) Mounts under drawer (11) only.

F9 GT 10284—Shpg. wt. 20 lbs. . . . Each \$35.99

SHPG. NOTE: "F" items (as F9 GT 10283) from factory in Aurora, Ill., Tatamy, Pa. or Dallas, Tex.; allow extra time for delivery; no C.O.D.s. "F" items with "N" (as F9 GT 10281N) pay motor carrier charges from factory; on other "F" items allow for shipping, handling charges from your Distrib. Ctr.

(13) Work Light. Mounts on wall or workbench.

CONST: 34-in. heavy-gauge steel arm, spring-tension control. Vented aluminum shade with white inside, black enamel finish outside. Incl. bracket.
ELEC. INFO: 110-120-v., 60-Hz. AC. UL listed. 6-foot, 2-wire cord. Uses 60-w. bulb (not included).
9 GT 2484—Shipping weight 3 lbs. 10 oz. \$19.99

(14 and 15) Workbench Stools

FRAME: 16-gauge steel. Gray enamel finish.
SEAT: Pressboard. 14x14 $\frac{1}{2}$ x26 inches high.

(14) Stool with back. Back bolted to sturdy support. Rubber feet, steel glides. 37 inches high.

ORDER INFO: If mailed, takes 15-lb. rate; see Parcel Post Information, page 69. Unassembled.
9 GT 10286L—Shipping weight 14 lbs. . . \$28.99

(15) Stool without back. Steel glide feet.

ORDERING INFORMATION: Unassembled.

9 GT 10287C—Shipping weight 10 lbs. . . \$17.99



Wall-mount
Hardboard
Storage
Cabinet
with
1 shelf

\$16⁹⁹

14-drawer
Chest

\$159⁹⁹

14-drawer
Cabinet

\$239⁹⁹

Chest and
Cabinet

\$389⁹⁸

See Chests
and Cabinets
on pages
136 thru 139

(A) Hardboard Wall Cabinet. Ideal for garage or workshop.

CONSTRUCTION: Hardboard with high-impact polystyrene frame. Back and sides perforated to hold hooks (not incl.). Particle-board shelf adjusts to 3 heights. Red and gray finish.

SIZE, STORAGE CAPACITY: 23 $\frac{1}{2}$ x26x12 in. deep. 3.5 sq. ft. of storage space on 2 shelf spaces, 3 cu. ft. with shelf removed.

ORDERING INFORMATION:

Unassembled. Order hook kit (D) on opposite page.

9 GT 65389C—Shipping weight 20 pounds \$16.99

(B) 14-drawer Chest. Red and charcoal gray enamel finish.

CONSTRUCTION: See complete information on pages 138 and 139.

OVERALL SIZE: 26x12x19 inches high.

DRAWER SIZES: 10 $\frac{5}{8}$ in. front to back. Eight top side drawers 7 $\frac{7}{8}$ in. wide, 1 $\frac{1}{8}$ in. deep. Four center drawers 4 $\frac{3}{4}$ in. wide, 1 $\frac{1}{8}$ in. deep. Two drawers 22 $\frac{1}{2}$ in. wide; one 1 $\frac{1}{8}$ in. deep, one 2 $\frac{1}{4}$ in. deep. Removable tote tray measures 18 $\frac{1}{2}$ x7 $\frac{1}{4}$ x1 $\frac{1}{2}$ in. deep.

ORDERING INFORMATION:

9 GT 65372N—Shipping weight 81 pounds \$159.99

(C) 14-drawer Cabinet. Red and charcoal gray enamel finish.

CONSTRUCTION: See complete information on pages 138 and 139.

OVERALL SIZE: 26 $\frac{1}{2}$ x18x40 $\frac{1}{16}$ inches high.

DRAWER SIZES: 16 $\frac{3}{4}$ in. front to back. Four top side drawers 7 $\frac{7}{8}$ in. wide, 2 in. deep. Top center drawer 4 $\frac{3}{4}$ in. wide, 4 $\frac{3}{16}$ in. deep. Nine drawers 22 $\frac{1}{2}$ in. wide; four 2 in. deep, five 3 $\frac{1}{8}$ in. deep.

ORDERING INFORMATION:

9 GT 65024N—Shipping weight 159 pounds \$239.99

Chest and Cabinet Set. Includes (B) and (C) above.

9 GT 65249N2—Shipping weight 240 pounds Set \$389.98

Organize your
work area with

Work Shop Storage Units

Help provide
quick, convenient
access to all
of your tools

Wall-mount Steel
Storage Cabinet
with 3 shelves

\$59⁹⁹

60-piece
Pegboard
Fixture Kit
\$5⁸⁷

ORGANIZERS™

Save 15%
when you buy
any 5 or more

13-piece Workbench Outfit
Separate prices
total \$203.87 **\$149⁸⁷**

9-piece Workbench Outfit
Save \$42 \$99⁹¹

5-piece Workbench Outfit
Save \$24 \$69⁹⁵

(D) **Pegboard Fixture Kit.** Includes 60 assorted straight, curved and U-shaped hooks; screwdriver, plier, multi-tool holders. Six screws, spacers. ORDERING INFO: Fit 1/8 or 1/4-inch pegboard. 9 GT 75563—Shpg. wt. 1 lb. 15 oz. . . Kit **\$5.87**

(E) **Cover for (F and G) below.** Clear plastic. 9 GT 71296—Shipping weight 6 ounces . . . **94c**

(F thru K) **Modular Organizers™.** Turn wasted wall space into efficient storage for tools and other shop items. Select and arrange units as you prefer. Molded grips make it simple to carry tray right to the job. Use in other rooms, too. CONST.: Durable molded plastic, attractive simulated woodgrain finish. Simple to clean. INSTALLATION: Attach 11-in. mounting rail to wall with screws and wall anchors (included). Tray rests on rail. Supports up to 25 pounds.

TYPES. ORDERING INFO: Wt. each 2 lbs. 8 oz.

Item	Catalog Number	Each	Any 5 or more, each
(F) 5 compartment	9 GT 71292	\$5.89	\$5.00
(G) 12 compartment	9 GT 71291	5.89	5.00
(H) 3-tier Shelf	9 GT 71293	5.89	5.00
(J) Drill Holder*	9 GT 71295	5.89	5.00
(K) Shelf	9 GT 71294	5.89	5.00

*Holds most drills with up to 3/8-in. capacity

Extra Mounting Rails (not shown)

9 GT 71297—24-in. long. Shpg. wt. 6 oz. . . **79c**

9 GT 71298C—36 in. long. Shpg. wt. 1 lb. **\$1.14**

(L) **Steel Wall Cabinet**

Lock your tools safely away while using open wall space above your workbench.

CONSTRUCTION: Heavy-gauge steel. Double-wall doors and back perforated to hold hooks (not included). Three shelves 67 1/16 x 25 31/32 inches long. Top two shelves adjust at 2-inch increments. Doors are braced around edges for rigidity. Magnetic latches on both doors hold them tightly shut. Padlock eye allows you to lock cabinet (lock not included). Red enamel finish.

SIZE. STORAGE CAPACITY: 26 1/16 x 30 x 9 inches deep. 3.49 square feet of storage space on three shelves. 3.35 cubic feet of storage space with shelves removed.

ORDERING INFORMATION: See "N" suffix on page 69. Tools not included. Order fixture kit (D) at left.

Shipping weight 31 pounds. 9 GT 65246N . . . **\$59.99**

(M thru P) **CRAFTSMAN Workbench Outfits**

WORKBENCH: Top: Flakeboard core, hardboard laminate on each side . . . reversible for longer wear. 2x5 ft. long, 1 in. thick. Frame: 14-gauge steel, cross-braced front and back. 1-piece sides with wrap-around corners for strength. Open back. 32 1/2 in. high. Feet adjust 3/4 in. Flange holes for bolting to floor. Bench remains steady while sawing, hammering or sanding. Holds up to 10 shelves or 10 drawers or any combination up to 10. Baked charcoal gray enamel finish.

LOCKING STEEL DOOR: Fits either side of frame. Full-length piano-type hinge. Perforated to hold hooks (not incl., order item D at left). 20 3/4 x 24 3/8 inches high. Baked charcoal gray enamel finish. Hardware, tumbler lock, 2 keys.

STEEL SHELVES: Fit either side of frame. Measures 18 1/2 x 16 1/2 inches deep. Baked charcoal gray enamel finish.

STEEL DRAWERS: Fit either side of frame. Compound-action, heavy-duty slides hold their alignment for smooth operation even under heavy loads. Measure 16 7/8 x 15 1/4 x 4 7/16 inches high. Red enamel finish.

ORDERING INFORMATION:

(M) **13-piece Outfit.** Includes top, frame, two locking doors and ten drawers. Unassembled. 9 GT 10253N9—Wt. 198 lbs. . . **\$149.87**

(N) **9-piece Outfit.** *Separate prices total \$141.91.* Incl. top, frame, locking door, 2 shelves and 5 drawers. Unassembled. 9 GT 10251N9—Wt. 154 lbs. . . **\$99.91**

(P) **5-piece Outfit.** *Separate prices total \$93.95.* Includes top, frame, 2 shelves, 2 drawers. Unassembled. 9 GT 10252N5—Wt. 118 lbs. . . **\$69.95**

Workbench alone. Includes top frame and unassembled. Shipping weight 92 pounds. 9 GT 10265N . . . **\$59.99**

Locking Steel Door alone 9 GT 10336C—Wt. 9 lbs. **\$11.99**

Steel Shelf alone 9 GT 10347C—Wt. 4 lbs. **\$4.99**

Steel Drawer alone 9 GT 10326—Wt. 9 lbs. **\$11.99**

COMPARE QUALITY **Sears** 7



CRAFTSMAN® 12-inch Band Saw-Sander

Cuts free-form or straight lines in wood up to 6 inches thick and 12 inches wide... makes the cuts and then sands them smooth; gets into even hard-to-reach crevices

Band Saw-Sander only

\$239⁹⁵

Save \$32

when you buy band saw-sander with 1/2-HP motor and sturdy steel legs


Separate prices total

\$331.93
\$299⁹³



Built-in light illuminates work area

Cast-metal table tilts from horizontal to 45° for bevel cuts



Speed Reducer **\$84⁹⁵**

(1) Band Saw-Sander alone. Overall: 38x26x14 1/2 in. deep.

USES: Ideal for general purpose sawing plus cutting of intricate shapes like table legs. Cuts plastic laminate, floor tile and more. Cuts metal with speed reducer and blade sold below. Replace blade with sanding belt for fine finishing.

DRIVE MECHANISM: Balanced 12 3/4-inch drive and idler wheels revolve on permanently-lubricated ball bearings. Knob quickly adjusts blade tension. Blade guides above and below table.

CUTTING CAPACITY: Cuts wood up to 6 in. thick, 12 in. wide.

WORK TABLE: Reinforced aluminum construction... 14x12 1/2 inches. Tilts 45° for bevel cuts. Has 3/4x3/8-inch groove for miter gauge (3) sold separately below.

ORDER INFO: Incl. 1/4x80-in. skip-tooth blade, 1/2x80-in. sanding belt (order extra blades and belt below), sanding platen, machine and motor pulleys, belt, belt pulley guard. Pull-on/push-off switch with removable locking key and receptacle for connecting 115-volt motor. See warranty, p. 14, goggles p. 57, UL listed.

9 GT 2435N—Shipping weight 78 pounds \$239.95

Band Saw-Sander above with Motor and Legs

CAPACITOR-START 1/2-HP MOTOR: (9 GT 1255C) 1725 rpm, 115-v., 60-Hz. AC. 660 full-load input watts. Four foot, 3-wire cord.

STEEL LEGS: Adjustable leveling feet, rubber pads. Unassembled.

ORDERING INFO: See warranty, p. 14, motor warranty, p. 30. 9 GT 2435 1N3—Shipping weight 126 pounds \$299.93

(2) Band Saw Rip Fence. For ripping evenly at predetermined widths... rips up to 5 inches. Locks at front. Includes fittings. Tilts to 45° with positive stop.

ORDERING INFORMATION: 9 GT 23433—Shipping weight 2 pounds \$19.99

(3) Miter Gauge. For saw above, most other saws with 3/4x3/8-in. deep miter slots. Locks at any angle from 0° to 60° right or left. Positive stops at 0° and 45° left or right.

ORDERING INFO: Use with stop rods and hold down clamps. 9 GT 29929—Shipping weight 3 pounds 2 ounces \$16.99

(4) Replacement Sanding Belts for band saw-sander above. Each measures 80x1/2-in. wide. Medium-fine surface. Package of 5. 9 GT 22361—Shipping weight 10 ounces Package \$3.49

(5 and 6) Replacement Blades for band saws

CONSTR: Alloy steel is heat treated and hardened for long wear and sharpness. Precision-ground for cutting accuracy. Each blade tension-tested for strength. Endless blades fit most band saws.

SIZES, USES, ORDER INFO: Steel cutting blades should be used only when band saw operates with speed reducer (7).

Catalog Number	For sawing	Width inches	Length inches	Teeth per in.	Wt. oz.	Each for	5 for
(5) Regular-tooth Blades.							
9GT26582	Wood, hardboard, plywood, chipboard*	3/16	54	15	4	\$3.49	\$14.95
9GT26641	Wood	1/4	62	6	5	3.99	17.95
9GT26642	Wood	3/8	62	6	5	3.99	17.95
9GT26572	Wood*	1/2	78	6	6	3.99	17.95
9GT26232	Wood	3/4	80	6	6	3.99	17.95
9GT26233	Wood	3/8	80	6	7	3.99	17.95
9GT26234	Wood	1/2	80	6	8	3.99	17.95
9GT26592	Plywood	3/4	80	15	4	3.99	17.95
9GT26593	Plywood	1/4	80	15	6	3.99	17.95
9GT2624	Brass, non-ferrous metals	3/4	80	10	6	3.99	17.95
Steel-cutting Blades.							
9GT26255	Steel	3/16	54	24	4	\$4.49	\$19.95
9GT2625	Steel	1/4	80	14	6	5.99	26.95

(6) Skip-tooth Blades. For extra-fast wood cutting.

9GT26595	Wood	1/4	80	4	5	\$3.99	\$17.95
9GT26596	Wood	3/8	80	4	7	3.99	17.95
9GT26597	Wood	1/2	80	4	8	3.99	17.95

*Fine-tooth for minimum splintering, smooth finish.

(7) Speed Reducer

USES: Reduces band saw blade speed to 135 feet per minute... 21.5 to 1 reduction. Allows use of metal cutting blades to cut non-ferrous metals, brass, steel.

CONSTRUCTION: Steel. Motor mounts on reducer. May be changed from reduced speed to normal quickly.

ORDERING INFORMATION: For use with 1725 rpm motor only (not incl.). Includes mounting bracket, adjusting rod. Fits most Craftsman 12-in. band saws and saw (1) above. Use with legs (9 GT 22236C) part of set above or sold separately, or stand (9 GT 22213C) sold on page 32.

9 GT 23896—Shipping weight 14 pounds 6 ounces \$84.95

YOU CAN DO IT

... with your CRAFTSMAN 12-inch Band Saw-Sander. For cutting curves and intricately shaped contours the band saw is the only heavy-duty tool that can do the job. Your Band Saw-Sander cuts bevel curves, compound shapes and then sands them to a smooth finish. Using a narrow enough blade your band saw will cut a circle as small as 1/4-inch, which makes it great for scrollwork, jigsaw-type pieces, taper cutting and much more. With the proper blades a band saw can cut metal or plastic as well as wood. Install a sanding board and you'll be able to finish in those hard to reach places. From a scroll-back rocker to a rustic weather vane, you'll be surprised at what you can do with a CRAFTSMAN Band Saw/Sander. All it takes is a little know-how and you can do it!




cuts bevel curves



cuts compound shapes



resaws wood up to 7 3/8 in. thick



sands smooth most any cut



fashions intricate designs



cuts metal with Speed Reducer (7)





(1 thru 13) Wood-turning Tools

CONSTRUCTION: Double-tempered high speed steel blades 4½-in. long. Precision-ground tips. Grooved 10-in. long hardwood handles for positive grip. Tools (9 thru 12), ORDERING INFO: See warranty, page 109.

Tool	Catalog Number	Wt. oz.	Price
(1) ½-in. Skew Chisel	9 GT 28527	9	\$5.99
(2) ½-in. Parting Tool	9 GT 28528	8	5.99
(3) ½-in. Round Nose	9 GT 28525	9	5.99
(4) ½-in. Spear Point	9 GT 28524	9	5.99
(5) ½-in. Gouge	9 GT 28523	10	7.99
(6) ½-in. Gouge	9 GT 28522	9	6.99
(7) ½-in. Gouge	9 GT 28521	8	5.99
(8) Half-round	9 GT 28531	12	7.99
(9) Full-round	9 GT 28532	12	7.99
(10) Left Skew	9 GT 28533	12	7.99
(11) Right Skew	9 GT 28534	12	7.99
(12) 1-in. Skew Chisel	9 GT 28528	11	7.99

Save \$20 on complete 12-pc. Set

Includes (1 thru 12) above.
ORDERING INFO: *Separate prices total \$84.88.*
9 GT 2867—Wt. 6 lbs. 8 oz.Set \$64.88

8-pc. Set of Wood-turning Tools. (1) thru (7), (12).
Shpg. wt. 4 lbs. 2 oz.
9 GT 2859Set \$44.99

4-pc. Set of Spindle Turning Tools. (2, 3, 5, 12).
Shpg. wt. 2 lbs. 4 oz.
9 GT 2853Set \$24.99

4-pc. Set of Face Plate Turn. Tools. (8) thru (11).
Shpg. wt. 2 lbs. 6 oz.
9 GT 2869Set \$26.88

(13) 8-pc. Set of Precision/Hobby Wood-turning Tools. Tempered high-speed steel blades 3½-in. long. Ground tips. 5½-in. long hardwood handles.

ORDERING INFO: For use with large lathes as above and hobby lathe on page 67. See warranty, page 109.
Shpg. wt. 3 lbs. 4 oz.
9 GT 2984Set \$29.99



(14 thru 29) CRAFTSMAN® Lathe Accessories

(14) Work Arbor. 2 steel flanges, nut on head for clamping wheels. ½-20 threaded spindle.

SIZES AND ORDERING INFORMATION:
No. 1 Morse Taper.
9 GT 21534—Shpg. wt. 11 oz. \$3.69
No. 2 Morse Taper.
9 GT 21522—Shpg. wt. 13 oz. \$3.69

(15) Work Arbor with Chuck. 3-jaw screw-on. ½-in. capacity. ½-20 thread.

SIZES AND ORDERING INFORMATION:
No. 1 Morse Taper.
9 GT 22344—Shpg. wt. 1 lb. 8 oz. \$5.99
No. 2 Morse Taper.
9 GT 22472—Shpg. wt. 1 lb. 10 oz. \$5.99

(16 thru 20) Morse Taper Center

Tool	Description	Catalog Number	Wt. oz.	Price
(16)	No. 1 60-degree	9 GT 21102	5	\$2.99
(17)	No. 2 60-degree	9 GT 21112	6	3.49
(18)	No. 1 60° Ball Brg.	9 GT 21122	11	6.99
(19)	No. 2 60° Ball Brg.	9 GT 21132	13	7.49
(20)	No. 1 Tailstock Cup	9 GT 21002	5	2.99
(21)	No. 2 Tailstock Cup	9 GT 21012	6	3.29
(22)	No. 1 Screw	9 GT 21164	8	4.29
(23)	No. 2 Screw	9 GT 21152	12	4.49
(24)	No. 1 Spur	9 GT 21062	6	3.29
(25)	No. 2 Spur	9 GT 21072	9	4.29

Draw Bolt (not shown). Use to secure center (9 GT 21164) above and work arbor (9 GT 21534) to spindle.
ORDERING INFORMATION:
Shipping weight 5 ounces.
9 GT 2154299c

(21) Work Arbors. Each arbor is 3¾-in. long with a 2¾-in. spindle. ½-20 thread. Carbon steel arbor. Steel flanges.
BORE SIZES AND ORDERING INFORMATION:
9 GT 21643—½-in. bore. Wt. 14 oz. \$2.75
9 GT 21644—¾-in. bore. Wt. 14 oz. 2.75

(22 and 23) Centers
Fit ¾-in. arbors.
TYPES, ORDER INFO:

(22) Headstock Spur.
9 GT 21052—Wt. 7 oz. \$3.69
(23) Tailstock Cup.
9 GT 21022—Wt. 7 oz. \$3.29

(24) 6-in. Face Plate
Cast-iron. For ¾-16 threaded arbor. 6 holes.
ORD INFO: Wt. 1 lb. 10 oz.
9 GT 24904 \$10.50

(25) Sanding Plate. 9-inches diameter; ¾-16 thread. Incl. 1 sanding disc.
ORDER INFO: Wt. 1 lb. 2 oz.
9 GT 24806 \$12.50

(26) 4-in. Face Plate
Cast iron. ¾-16 threaded arbor.
ORDER INFO: 9 holes.
9 GT 2489 \$9.50

4-in. Face Plate. Cast aluminum. 8 holes.
ORDER INFO: Wt. 1 lb. 4 oz.
9 GT 23865 \$7.99

(27) Bowl Turning Tool Rest. Cast iron. 7½ diam. shank.
ORD INFO: Wt. 2 lbs. 6 oz.
9 GT 24903 \$10.50

(28) 3-inch Face Plate
Cast-iron. ¾-16 thread.
ORDER INFO: Wt. 1 lb. 4 oz.
9 GT 20912 \$9.99

(29) Speed Reducer. Reduces speed to as low as 300 rpm with 1725 rpm, 48- or 56-frame motors.
ORDERING INFORMATION:
Wt. 8 lbs. 2 oz.
9 GT 23895 \$32.99

CRAFTSMAN® 12-inch Lathe

Have fun and enjoy the satisfaction of transforming rough stock into something useful and beautiful

With additional accessories, lathe can perform such jobs as sanding and buffing



Lathe with motor
\$209⁹⁴

Lathe alone
\$169⁹⁵

Lathe complete with motor and workbench
\$249⁹³

Lathe with Motor and Workbench

LATHE CONSTRUCTION: 19x11x54½ in. long. Cast-iron head, tailstock have #1 Morse taper. Steel tubing bed 45½ in. long; 2¼-inch diameter. Spindle turns on permanently lubricated ball bearings. Has ¾-16 threaded spindle.
CAPACITY, CONTROLS: Turning capacity of 12-in. diam. over bed for faceplate turnings, 8-in. diam. over tool rest, 37 in. between centers. Hinged belt guard eases speed changes . . . side-mounted chart helps you select proper speed for the job. Front hand levers let you lock tool rest, tool rest base, tail stock, and ram in position. Tail stock slides along bed, hand wheel advances ram to 2¾ in. Index pin in head stock for settings to 36 equal spacings.
MOTOR: Capacitor-start, ½-HP, 1725 rpm motor (9 GT 1255C). Sleeve bearings. 4-step machine, motor pulleys for speeds of 875, 1350, 2250, 3450 rpm.
WORKBENCH CONSTRUCTION: Legs and braces of 16-gauge steel. Flake-board top 24x60x1 in. thick. Stands 32½ in. high. Baked gray finish.

ELECTRICAL INFORMATION: Lathe has pull-on/pushoff switch with key; 6-ft., 3-wire cord; motor runs on 115-v., 60-Hz., AC; 660 full-load input watts; 4-ft., 3-wire cord. Motor plugs into receptacle on lathe switch.

ORDERING INFORMATION: *Save \$24.00. Separate prices total \$273.93.* Includes 4-step machine and motor pulleys; V-belt; 6 and 12-in. tool rests; spur and cup centers (No. 1 Morse taper) and operating instructions. Workbench sent unassembled. See Full One-year Warranty for lathe on page 14. See Full One-year Warranty for motor on page 30. Order goggles page 51.
9 GT 23813N3—Wt. 170 lbs. \$249.93

Lathe with Motor. As above but without workbench.

ORDERING INFORMATION: *Save \$18.00. Sep. prices total \$227.94.*
9 GT 23805N2—Wt. 101 lbs. \$209.94


Lathe alone. As above but without motor, workbench. Meets "UL Standard 987 for Safety".
9 GT 2380N—Wt. 80 lbs. \$169.95

New at Sears . . . Copy Crafter for lathe \$79⁹⁹

Duplicates spindle and faceplate turnings from originals or templates

Cutting tool duplicates workpiece . . . just follow the outline of an original turning or template. Spindle turnings up to 2½ inches in diameter and 36 inches long can be duplicated from an original turning; up to 6 inches in diameter and 36 inches long from a template. Shallow faceplate turnings up to 8 inches in diameter can be duplicated from a template.
CONSTR: Cast iron, steel. 36½x11x3¼ in.
ORDER INFO: Hardware, instructions incl. Shipping weight 41 lbs.
9 GT 24907L \$79.99

Replacement Bit for Copy Crafter. High speed tool steel construction.
9 GT 24908—Shpg. wt. 6 oz. \$3.99





CRAFTSMAN® High-speed Shaper

Make scallops, rabbets and contours on furniture projects... all with the same tool

Shaper alone **\$189⁹⁵**

Shaper Outfit... includes Shaper, Stand and Motor

Save \$23

Separate prices **\$265⁹³**
total \$288.93

Shaper Outfit. Cuts so smooth almost no sanding needed.

CONSTRUCTION. CAPACITY: Cutter head revolves at approximately 9,000 rpm for smooth cuts. One-piece, ground cast-iron table measures 19x27 inches... has 3/4x3/8-inch groove for miter gauge (sold separately on page 19). Each half fence is individually adjustable from left to right and from front to rear. Features new cutter guard that attaches behind table... allows inside, internal contour shaping. Spindle turns on permanently lubricated ball bearings. Spindle height adjusts 7/8-inch and accepts cutters of 1/2-inch bore up to 2 1/2-inch diameter. Cutters can be used individually or in combination.

STAND: Steel construction with rubber-padded leveling feet... adjust to uneven or sloping floors, resist creeping and marring of floors. Sent unassembled.

MOTOR: Capacitor-start, 1/2-HP, 2450 rpm. Pre-lubricated sleeve bearings.

ELECTRICAL INFORMATION: Runs on 115-volt, 60-Hertz, AC. 720 full-load input watts. Lockable pull-on/push-off power switch with six-foot, three-wire cord.

ORDERING INFORMATION: Includes belt pulley guard, hardened collars, nuts, washers, motor and machine pulleys and V-belt. See Warranty on pg. 16. Motor warranty on page 30. Order casters on page 11. Protect your eyes... order safety goggles sold on page 57.

Shaper with Motor and Stand.

Shipping weight 151 pounds.
9 GT 23928N3 \$265.93

Shaper alone. As above, but without stand or motor. UL listed.

Shipping weight 95 pounds.
9 GT 2392N \$189.95

(1) Reversing Switch for use with motors up to 1 HP

FUNCTION: Switch gives you the control to stop, reverse split-phase and capacitor-start motors up to 1 HP. Use on high-speed shaper above, to reverse spindle rotation when needed. For up to 550-volt, AC. Installation diagram included.

ORDERING INFORMATION:
9 GT 2982—Wt. 1 lb. 6 oz. \$38.95



Each half-fence individually adjustable

19x27-inch worktable



New Cutter Guard for inside, internal contour shaping



Optional Switch for reversing spindle rotation



(2 thru 6) New at Sears! Pre-cut Wood

Each, 36 in. long... for use with shapers, routers, table saws

Select packages of kiln-dried pieces for use in creating fine projects like cutting boards, cabinets and signs. Each board kiln dried to 6% moisture content to help provide maximum quality.

DIMENSIONS: Four pieces: each 36 inches long, 1 1/16 inches thick, 5 board feet. Variable widths... one: 3 1/2 to 5 inches wide; two: 6 to 7 inches wide; one: 7 to 8 inches wide.

ORDERING INFORMATION:
Package of four.

(2) 9GT3064C—Red Oak. Wt. 19 lbs. \$14.99
(3) 9GT3065C—Blk. Walnut. Wt. 17 lbs. 22.99
(4) 9GT3061C—Ash. Wt. 18 lbs. 14.99
(5) 9GT3062C—Cherry. Wt. 18 lbs. 18.99
(6) 9GT3063C—Maple. Wt. 19 lbs. 10.99



(7 thru 21) Alloy Steel Shaper-cutters For shaper above

Use with shaper above (individually or in combination) to make patterns shown at far right. All cutters have 2-inch diameter, 1/2-inch bore; all are 1 inch high except (14), 1/2-inch high and (16), 1/4-inch high. Made of long-lasting alloy steel.

SHAPE, ORDERING INFORMATION:

Shaper Cutter Type	Catalog no.	Wt.	Price.
(7) Lip Cupboard Door or 3/4-in. Quarter Round	9 GT 3294	5 oz.	\$6.79
(8) 1-inch Jointer	9 GT 3289	5 oz.	6.79
(9) 3-bead, 1/2-in. Molding	9 GT 3293	5 oz.	6.79
(10) 1/2-in. radius Base Shoe	9 GT 3285	5 oz.	6.79
(11) 2 1/2-in. diam., 1/2-in. Ogee	9 GT 3282	5 oz.	8.99
(12) 1/4 and 1/2-in. radius Ease	9 GT 3295	5 oz.	6.79
(13) Drop Leaf Cove	9 GT 3290	5 oz.	6.79
(14) 1/2-inch Groove	9 GT 3288	4 oz.	6.79
(15) Reversible Glue Joint	9 GT 3284	5 oz.	6.79
(16) 1/4-inch Groove	9 GT 3287	4 oz.	6.79
(17) Taper Edge	9 GT 3292	5 oz.	6.79
(18) Drop Leaf Bead	9 GT 3291	5 oz.	6.79
(19) 1/4-in. Ease Edge or Screen Molding	9 GT 3286	5 oz.	6.79
(20) 2 1/2-in. diam., 1/2-in. Quarter Round	9 GT 3281	5 oz.	8.99
(21) 1/4-in. Tongue and groove Matched Set	9 GT 3283	8 oz.	12.79

15-pc. Set of Alloy steel Shaper-cutters Save \$22.26. Sep. prices total \$112.25. Incl. (7) thru (21) at left.

ORDERING INFO: Wt. 3 lbs.
9 GT 32907 Set \$89.99

(22) Sash and Door Cutting Kit

USES: For making intricate cuts used in door and window frames.

COMPOSITION: Kit includes five spacer collars with 1/2-inch bore (1/8, 1/4, 3/16, 1/2 and 1 in.); sash cutter blade; 3 recessed nuts (1/2x24, 1/2x20, 1/2x16 Acme thread); and hex key.

ORDER INFO: Use with shaper above or former shapers 9-2393, 9-2394.
9 GT 2407—Wt. 8 oz. Kit \$9.99

(23) 5-piece Shaper Collar Set

Fits 1/2-inch spindle.
USE: Provides bearing surface above or below cutter for part not to be shaped.

ORDERING INFORMATION: For use with shaper shown above or former shapers 9-2393 and 9-2394.
9 GT 23672—Wt. 8 oz. Set \$5.99



**Bevel, surface or
edge-finishing...**

CRAFTSMAN®

Belt-disc Sander

Helps you rough or smooth
sand even irregular surfaces

Belt-Disc Sander **\$169⁹⁵**

Belt-Disc Sander Outfit
incl. sander, motor, stand

Save \$23

Separate prices **\$249⁹³**
total \$272.93

Belt-disc Sander Outfit

BELT, DISC: 6x48-inch belt tilts, locks at any angle from 0 to 90°. Removable backstop. Belt travels at about 2100 feet per minute. Disc rotates at approx. 2700 rpm. Adjustable belt tension, tracking. 9-inch diameter disc.

TABLE, BASE: Removable 6½x12-inch cast aluminum table tilts to 45° for bevel sanding; has ¾x¾-inch groove for using miter gauge (not incl.). Drive shaft and pulleys revolve on permanently lubricated ball bearings.

STAND: Steel construction, rubber-padded leveling feet . . . adjust to uneven or sloping floors, resist creeping and marring of floors. Top measures 19½x15¼ in.

MOTOR: Capacitor-start ¾-HP, 3450-rpm motor. (9 GT 1226C, see motor description on page 30). Pre-lubricated sleeve bearings.

INCLUDES: One medium grit disc and belt; machine, motor pulleys; guard with 2½-inch diameter coupling for vac and V-belt. Sent unassembled.

ELECTRICAL INFORMATION: Runs on 115-volt, 60-Hertz, AC. 1000 full-load input watts. Lockable pull-on/push-off power switch with 6-foot, 3-wire cord.

ORDERING INFORMATION: See Warranty on page 16. Order safety goggles on page 57.

9 GT 22584L3—Shipping weight 126 pounds . . . \$249.93

Sander alone. No motor or stand. UL listed. "Meets UL Standard 987 for Safety".

9 GT 2258L—Shipping weight 68 pounds . . . \$169.95

Stand alone. Fits sander above and shaper on pg. 10.

9 GT 22213C—Shipping weight 39 pounds . . . \$42.99

Motor alone. Fits sander above and shaper on page 10.

9 GT 1226C—Shipping weight 19 pounds . . . \$59.99

(1) Heavy-duty Caster Set. For Belt-disc Sander. Also fits all Craftsman leg sets, stands and cabinets for Craftsman power tools. Sold on page 32.

ORDERING INFORMATION: Set of four.

9 GT 22208—Wt. 6 lbs. 11 oz. Set \$21.99

100 square inches of
sanding surface



Belt tilts and locks
at any angle
from horizontal
to vertical.
table is removable
for disc or belt use



Casters for
Stand
\$21⁹⁹

CRAFTSMAN® Motorized Sander-Grinder

With 1/3-HP motor that drives belt at 3000 ft. per minute for extra fast, smooth work

(2) Motorized Sander-Grinder

Versatile sander-grinder can be used for numerous hobby and job tasks. Grind metal, sharpen tools, use for inside finishing and contour sanding jobs.

MOTOR: ¼-HP split-phase, 1725-rpm motor. Pre-lubricated sleeve bearings. Built-in guard over motor, sanding belt pulleys. Built-in on/off switch.

SANDING BELT: Belt moves at approximately 3000 feet per minute. Aluminum oxide, medium grit belt is 1x42 inches long. Re-thread belt through openings for inside sanding tasks.

HOUSING AND TABLE: Steel frame, rubber mounts help to reduce vibration. 7x9-inch steel worktable . . . tilts forward 60°. Overall, measures 18x9¼x21 inches high.

ACCESSORIES: Includes pulley, V-belt.

ELECTRICAL INFORMATION: 4-foot, 3-wire cord, 115-volt, 60-Hz, AC. 490 full load input watts. UL listed.

ORDERING INFORMATION: See Warranty on page 16. Shipped completely assembled. Safety goggles pg. 57.

Shipping weight 52 pounds.

9 GT 2256L \$139.95

Extra Sanding Belts

Use with Sander-Grinder (2) at left.

1x42 inch. Aluminum oxide.

GRIT, ORDER INFO: Includes package of three belts.

9 GT 26056—Fine. Wt. 6 oz. . . \$2.29

9 GT 26055—Med. Wt. 7 oz. . . 2.29

9 GT 26054—Coarse. Wt. 8 oz. . 2.29

(3) 8-in. Sanding Disc Attachment

Aluminum sanding disc. 4½x12-inch table tilts for bevel sanding purposes. Has miter groove for use with miter gauge (4) sold below.

ORDERING INFORMATION:

9 GT 22563—Wt. 14 lbs. . . . \$24.99

(4) Miter Gauge for (3)

Steel and aluminum construction. Gauge locks at any angle. Use for angle and bevel sanding.

ORDERING INFORMATION:

9 GT 22574—Wt. 1 lb. 10 oz. . . \$7.99

(5) Steel Leg Set. Has rubber padded leveling feet . . . adjust to uneven floors. Top measures 21½x16 in.

ORDERING INFORMATION:

Shipped unassembled.

9 GT 22239C—Wt. 25 lbs. . . . \$32.99



To convert belt
for sanding just
reposition arm



Table tilts to
60° angle for
tool sharpening



Disc Attachment
lets you sand
objects sharp

Motorized
Sander-Grinder
\$139⁹⁵

Sanding Disc
Attachment
\$24⁹⁹

Miter
Gauge
\$7⁹⁹



COMPBKD SLAEG3 **Sears** 11



CRAFTSMAN® 15½-inch Drill Presses

- 8 speeds—from 380 to 8550
- Powerful Torsion Spring—provides quick quill return
- Pull-on/push-off Safety Switch—located up-front for easy access
- Rugged cast-iron head, table and base

Drill Press Specifications for both Presses (A) and (B)

Speeds-eight	380, 480, 720, 1325, 2300, 4250, 6400, 8550 R.P.M.	Chuck capacity	0-½-inch
Distance spindle to column	7¾ inches	Drive splines	Six
Distance base to chuck	48½ inches (maximum)	V-belt	¾x45 inches
Table travel	42½ inches	Machine pulley	6-inch, 8-step
Spindle	No. 33 Jacobs taper	Motor pulley	6-inch, 8-step ¾-inch bore keyed
Spindle travel	4 in. (maximum)	Height x width x depth	72¼x15x27 inches
Depth graduations	⅛-inch—mm	Motor	Use ½-HP, 1725-rpm



For more information on CRAFTSMAN Bench Power Tools and Accessories send for FREE BOOKLET 39 GT 7499

Home-Shop Drill Press

- One-pc. head, single row lower spindle ball-bearing assembly
- Built-in worklight switch is independent of power switch

Drill Press with ½-HP Motor

Save \$18

Separate prices total \$347.94

\$329⁹⁴

Shaper Fence Attachment sold separately on opposite page



Rotary Indexing Table sold separately on opposite page

Industrial-type Drill Press

- Split head with take-up adjustment to compensate for normal quill wear—pre-loaded double-row lower ball bearing assembly for durability and accuracy
- 14x14½-in. surface

Drill Press with ½-HP Motor

Save \$46

Separate prices total \$445.94

\$399⁹⁴

(A) Home-Shop Drill Press without motor.

Designed for the needs of the home workshop or light industry. Meets "UL Standard 987 for Safety".

HEAD CONSTRUCTION: One-piece cast-iron. Lower spindle bearing assembly is single-row ball bearing type for prolonged quill life and smooth operation. Pulley turns on ball bearings.

COLUMN, TABLE, BASE: Steel column. Cast-iron slotted work table with clamping ledges for mounting accessories measures 10x12 in. Table slides up or down on column a total of 42½ inches. Cast-iron base has pre-cast holes for bolting base to floor (bolts not included).

ELECTRICAL INFORMATION: UL listed. Built-in worklight. Power switch with 6 ft., 3-wire cord, receptacle for connecting 115-v. motor. Light, power switches work independently.

ORDERING INFORMATION: Includes chuck, key, belt, machine, motor pulleys. Motor not included; order drill press with motor below or use a minimum ½-HP, 1725 rpm motor. Additional accessories for specialized wood working operations, metal and wood drilling sold on opposite page. See specifications above, warranty on pg. 16.

9 GT 2137N—Shipping weight 181 pounds\$289.95

Home-Shop Drill Press with Motor. As (A) above but with ½-HP, 1725-rpm motor. Capacitor start with sleeve bearings.

ELECTRICAL INFO: Uses 115-volt, 60-Hz. AC. 660-full load input watts. 4 ft., 3-wire cord connects to power switch in press.

ORDERING INFORMATION: For more complete motor description and warranty see 9 GT 1255C on page 30.

9 GT 21376N2—Shipping weight 202 pounds\$329.94

(B) Industrial-type Drill Press without motor.

Designed to produce accurate results according to the close tolerances and specifications required in industrial and commercial-type applications. Meets "UL Standard 987 for Safety".

HEAD CONSTRUCTION: Split-head of cast iron with take-up adjustment that lets you compensate for normal quill wear. Double-row lower ball bearing assembly is pre-loaded to minimize spindle drop, withstand heavier thrusts than Home-Shop Drill Press at left. Pulley turns on permanently lubricated ball bearings.

COLUMN, TABLE, BASE: Steel column. Cast iron table with "T" slots for attaching accessories; trough for catching liquid coolants. 14x14½ in. Table slides up or down on column, total of 42½ in. Cast iron base with pre-cast holes for bolting base to floor (bolts not included).

ELECTRICAL INFORMATION: UL listed. Pull-on/push-off power switch with 6-foot, 3-wire cord and receptacle for connecting 115-volt motor. Separate switch for built-in worklight.

ORDERING INFORMATION: Includes chuck, key, belt, machine and motor pulleys, pulley guard. Motor not included; order press with motor at right or use minimum ½-HP, 1725 rpm motor. See specifications at top of page. Warranty, pg. 16. Safety goggles on pg. 57.

9 GT 2452N—Shpg. wt. 200 lbs.\$369.95

Industrial-type Drill Press with ½-HP motor.

As in (B) left, but with enclosed ½-HP, 1725-rpm motor. Capacitor-start, ball bearings.

ELEC. INFO: Uses 115-v., 60-Hz., AC. 660 full-load input watts. With 4-ft., 3-wire cord that connects to 6-ft. power switch in drill press. Switch for 115-v. use only.

ORDERING INFO: For motor description, see 9 HT 1223 on p. 31.

9GT24521N2—Wt. 226

lbs.\$399.94


Replacement V-belt for drill press (B) at left and ½-HP press above.

9 GT 1745—Wt. 3 oz.\$4.99

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

they do more than just drill holes... with the right accessories you can plane, mortise, rout, dovetail, shape and more!

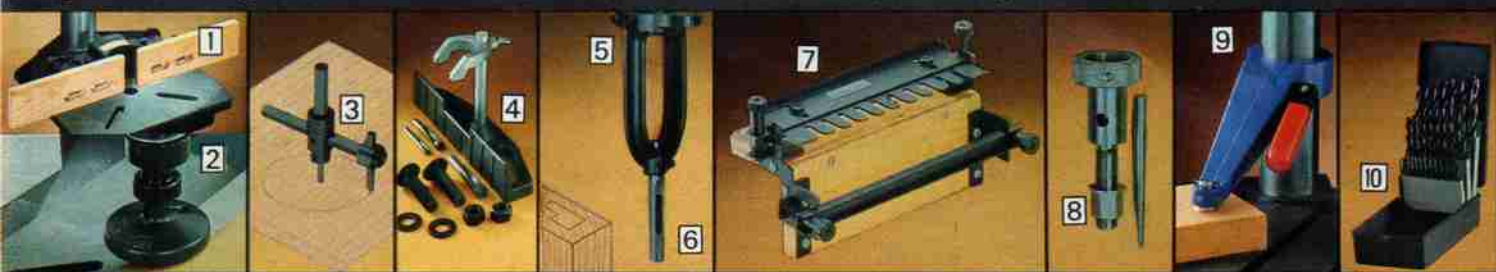

(1) CRAFTSMAN Shaper Fence Attachment

Shown mounted on press. Helps support work pieces for shaping work like picture frames or decorative moldings.

CONSTRUCTION, CAPACITY: Hardwood fences open 1 to 3 in. Independently adjustable. Fits most Craftsman drill presses.

ORDER INFO: Use with adapter (8) right. 9 GT 2486—Wt. 5 lbs. 8 oz.\$34.99

(2) CRAFTSMAN Rotary Planer

Mounts on spindle in place of chuck to surface-plane wood, reduce stock to a desired thickness. Also dresses, trues up, finishes rough or warped stock.

CONSTRUCTION, CAPACITIES: Die-cast aluminum body with steel blade. Planes 2 3/4-in. wide path. Fits both drill presses on opposite page, former 9-2131, and most presses with No. 33 Jacobs taper and 1 1/2-in. threaded locking collar.

ORDERING INFORMATION:

Shipping weight 1 pound. 9 GT 2745.....\$17.99

(3) CRAFTSMAN Circle Cutters. Bit of high speed ground tool steel... graduated in 1/16-in. With set screw wrench.

SIZES, CAPACITIES, ORDERING INFO:

1/2-in. shank. Cuts 1 3/4 to 6 1/2-in. diameter. 9 GT 3640—Shpg. wt. 14 oz.\$7.99
1/4-in. shank. Cuts 7/8 to 4-in. diameter. 9 GT 3645—Shpg. wt. 7 oz.\$4.99

(4) Drill Press Mortising Kit

CONSTRUCTION: Hold-down and guide of cast aluminum... holds workpieces up to 4 1/2-in. thick. Mortising bits are made of high speed steel, hardened, tempered and ground.

KIT COMP: Hold-down, guide, 1/2, 3/4, 1-in. diam. bit for mortises 1/2-in. wide to 2-in. deep, 3/8-in. wide to 1 1/2-in. deep, 1/4-in. wide to 1 1/4-in. deep. Attaching nuts, bolts incl.

ORDERING INFO: Fits most drill presses. 9GT29503—Wt. 2 lbs. 3 oz.Kit \$19.99

Replacement Bits for Kit (4) above.

9GT24215—1/4-in. Chisel. Wt. 3 oz.\$2.99
9GT24216—3/8-in. Chisel. Wt. 3 oz.3.99
9GT24217—1/2-in. Chisel. Wt. 4 oz.4.99

(5) Mortising Chisel Housing. For chisels (6) below. Fits most Craftsman drill presses with 1 1/2-in. or 1 3/4-in. quill.

ORDERING INFORMATION:

9 GT 2465—Wt. 4 lbs. 2 oz.\$16.99

(6) Hollow Mortising Chisels and Chisel Bits. For (5) above and former 9-2464.

SIZES, ORDER INFO: Shpg. wt. 4 oz.

Catalog Number	Size	Cut Depth	Each
Mortising Chisels			
9 GT 24201	1/4-in.	1 1/4-in.	\$9.99
9 GT 24202	3/8-in.	3-in.	10.99
9 GT 24203	1/2-in.	3-in.	10.99
Mortising Bits			
9 GT 24221	1/4-in.		\$7.99
9 GT 24222	3/8-in.		8.49
9 GT 24223	1/2-in.		9.49

(7) Dovetail Attachment

Make sturdy dovetail joints like drawers of fine cabinets. This attachment also cuts flush or lipped joints.

CONSTRUCTION, CAPACITY:

Attachment made of hardened steel. Clamp holds work pieces at 90° angle and bit cuts drawer front and side at the same time. Slotted comb controls spacing and depth of cut. Includes end plates, comb screw fittings, clamps, wood parts and operating and set-up instructions. For use with any drill press. Uses 1/2-inch Dovetail Cutter router bit (9 GT 25531) not included... order separately on page 81.

ORDERING INFORMATION:

Shpg. wt. 3 lbs. 8 oz.

9 GT 2462.....\$24.99

(8) Adapter for shaper fence

CONSTR., CAPACITIES: Steel.

Accepts 1/2-inch bore shaper cutters up to 2-in. in diam., 1/2x20 threaded spindle. Fits drill presses on opposite page, most Craftsman, and others with No. 33 Jacobs taper.

ORDER INFO: Order shaper cutters separately on page 10.

9 GT 24832—Wt. 12 oz.\$6.29

(9) Drill Press Clamp and Guide.

Attaches to drill press column and holds even difficult workpieces with a tight grip.

CONSTR: Cast aluminum.

CAPACITY: Holds work with 200 lbs. pressure.

ORDERING INFO: Fits all 15 1/2-in. drill presses with a 2 3/4-in. diam. column. One or 2 units can be used.

Shpg. wt. 3 lbs. 12 oz.

9 GT 2451.....\$29.99

(10) 29-piece Twist Drill Bit Set

CONSTR: High-speed steel. Black oxide finish. Precision-ground flutes, margin and point-reliefs. Point accurate to .002 tolerance. Exceed Fed. Specs. GGG-D-751 b. Hi-impact polystyrene index case.

SIZES: 1/16 to 1/2-inch by 64ths of an inch. Jobber length.

ORDER INFO: Save \$14.82. Sep. prices total \$64.81.

Shpg. wt. 3 lbs. 9 oz.

9 GT 6817.....Set \$49.99

Arbor. (Not shown.) For use with buffing wheels, sanding drums.

1/2-23, steel. Fits presses on opposite page.

9 GT 24645—Wt. 8 oz.\$3.99

Table-mount Accessories for accurate wood/metal drilling



(11) Rotary Indexing Table. For layout, indexing, holding, drilling, milling, routing and shaping, etc.

CONSTRUCTION, CAPACITY: Made of cast-iron and steel. Jaws open to 4 1/2-in. Dial calibrated in 3-min. intervals to .001-inch tolerance. 8-inch diameter table rotates 360°. Bolts to table. Bolts not included.

ORDERING INFORMATION:

Shipping weight 41 pounds.

9 GT 2495L.....\$249.99

(12) Universal Compound Vise. Designed for all types of specialized drill press operations in which holes, key slots, etc. must be accurately located, spaced or shaped.

CONSTRUCTION, CAPACITY: Made of cast-iron. Jaws open to 4 1/2 in. One jaw swivels; other jaw has movable face. 90° graduations. 7x7-inch table size overall... 6x5-inch table travel. 4 3/4 in. high. With wrench. Bolts to drill press table.

ORDERING INFORMATION:

Shipping weight 35 pounds.

9 GT 2432C.....\$214.99

(13) Angle Vise with swivel base. For angle drilling or jobs where vise jaws are positioned out from under drill chuck and bit.

CONSTR., CAPACITY: Cast-iron and steel. Steel-faced jaws open to 2 1/2-in. Vise adjusts from 0 to 90°... turns 360° on detachable swivel base. Vise can be used horizontally. Bolts to table. Bolts not incl.

ORDERING INFORMATION:

9 GT 2752—Wt. 12 lbs. 15 oz.\$39.99

(14) Angle Vise. Same construction and capacities as (13) above, but without swivel base. Measures 9 inches long.

ORDER INFO: Wt. 9 lbs. 13 oz.

9 GT 2756.....\$24.99

(15) General-purpose Vise

CONSTR., CAPACITY: Steel and cast-iron. Steel-faced jaws open to 3 inches wide. Cast-iron base is 8 inches long. Bolts to drill press table... bolts not included.

ORDERING INFO: Wt. 8 lbs. 2 oz.

9 GT 2757.....\$21.99

(16) Adjustable Hold-down and Guide

CONSTRUCTION AND CAPACITY: Cast-iron. Hold-down adjusts to accommodate work pieces up to 5 inches thick. Fits most drill presses. Bolts to table... bolts not included.

ORDERING INFO:

Shpg. wt. 5 lbs.

9 GT 2457.....\$15.99

(17) Tilt Table

CONSTR., CAPACITY: Cast-iron. Indexes at 45° or 90° left or right... rotates and locks at any angle in between. 8 1/2x11 1/4 in. Mounts to the back of existing table.

ORDERING INFO:

Shpg. wt. 12 lbs. 8 oz.

9 GT 2439.....\$27.99

YOU CAN DO IT



... with CRAFTSMAN® Drill Presses and Accessories. Take advantage of drilling rapidly and precisely through metal or wood with your drill press. Add the accessories used on these two pages and you can make round and square mortises to joint table legs and tops together. You can make sturdy dovetail joints with our dovetail attachment—similar to the kind you'll find in fine cabinets. With our shaper fence attachment you can make decorative cuts on picture frames and moldings for a truly professional effect. You'll be surprised at what you can do with your CRAFTSMAN Drill Press and Accessories. All you need is a little know-how and you can do it!





CRAFTSMAN® Planer-Molder with 5-HP or 2-HP motor

Handles wood up to 12 inches wide and 6 inches thick. You set the thickness you want. It planes rough surfaces, edges to a professional smoothness and precise thickness. Also makes trim for doors, windows and other projects



Planer-Molder Outfit with 5-HP motor... heavy-duty for commercial use and continuous running

Complete outfit **\$1079⁰⁰**

Planer-Molder Outfit with 2-HP motor

Complete outfit **\$969⁰⁰**

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Automatic power feed runs boards through at 12 feet per minute. Constant speed means you get consistent, smooth planing without unsightly ridges.

CAPACITY, CONSTR: 3-knife, ball-bearing cutter-head planes up to $\frac{3}{16}$ in. deep, molds up to $\frac{3}{4}$ in. deep, turns at 4,000 rpm. Hard rubber rollers. 42 in. steel bed.
STAND, ACCESSORIES: Steel stand 22 $\frac{1}{2}$ inches high, 24 $\frac{3}{4}$ -inch square bottom. Includes cast-iron, 2-groove motor pulley, matched drive belts. Low, no-voltage, protective on-off switch.

Planer-Molder with 5-HP motor.

MOTOR: Induction-run, totally enclosed, 5-HP motor (9 GT 1232N). Capacitor start, fan cooled. Permanently lubricated ball bearings. Manual reset overload protector. Heavy-duty for commercial and continuous use.

ELECTRICAL INFORMATION: 230-volt, 60-Hertz AC. 5500 full-load input watts.

ORDERING INFO: Warranty, Shipping Note, below.

T9 GT 23386N3—Shpg. wt. 356 lbs. \$1079.00

Planer-Molder with 2-HP motor.

MOTOR: High-torque, totally enclosed, 2-HP motor (9 GT 1231C). Capacitor start, fan cooled. Permanently lubricated ball bearings.

ELECTRICAL INFORMATION: 115-230-volt, 60-Hertz AC. 2200 full-load input watts.

ORDERING INFO: Warranty, Shipping Note, below.

T9 GT 23396N3—Shpg. wt. 299 lbs. \$969.00

Planer-Molder alone. Without stand, motor, switch, motor pulley or V-belts.

ORDER INFO: See warranty, Shipping Note, below.

T9 GT 2339N—Shpg. wt. 225 lbs. \$639.00

Replacement Knives for planer-molders above. Set of three. High-speed, hard steel.

ORDERING INFORMATION: Shipping weight 1 lb.

9 GT 4749 Set \$29.95

FULL ONE YEAR WARRANTY ON CRAFTSMAN STATIONARY POWER TOOLS: If, within one year from the date of purchase, any CRAFTSMAN Stationary Power Tool fails due to defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply contacting the nearest Sears store or Service Center throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SHIPPING NOTE: "T" items (as T 9 GT 2339N) sent from Chicago, Philadelphia, Atlanta, Dallas or Los Angeles. Customers served by other Distribution Centers: allow extra time, pay motor carrier charges from your Distribution Center. C.O.D.'s accepted only for shipment to a Sears store.

(1 thru 12) Molding Cutter Bits. Alloy steel.

ORDERING INFORMATION: For planer-molders above.


Shaper Cutter type	Catalog Number	Shpg. wt.	No. in Set	Set
(1) Ogee window stop	9GT23308	2 oz.	3	\$4.99
(2) 90° flute V-groove	9GT23309	2 oz.	3	4.99
(3) 3-bead	9GT23305	2 oz.	3	4.99
(4) $\frac{1}{4}$ - $\frac{1}{2}$ -in. qtr. rd.	9GT23304	2 oz.	3	4.99
(5) Rabbet	9GT23301	2 oz.	3	4.99
(6) Clover-leaf screen mold	9GT23306	2 oz.	3	4.99
(7) 1-in. radius flute	9GT23311	2 oz.	3	4.99
(8) Base mold	9GT23303	2 oz.	3	4.99
(9) Glue joint	9GT23307	2 oz.	3	4.99
(10) $\frac{5}{16}$ in. qtr. round cove	9GT23312	2 oz.	3	4.99
(11) $\frac{3}{16}$ - $\frac{1}{2}$ -in. qtr. rd.	9GT23313	2 oz.	3	4.99
(12) Tongue and groove	9GT23302	4 oz.	6	8.99

Molding Cutter Bit Set. Includes 39 bits: sets (1 thru 12) listed in chart above and shown at left.



ORDERING INFO: Separate prices total \$63.88.

9 GT 2301—Shpg. wt. 1 lb. 14 oz. Set \$49.88

Molding Cutter Bits increase versatility of your planer-molder

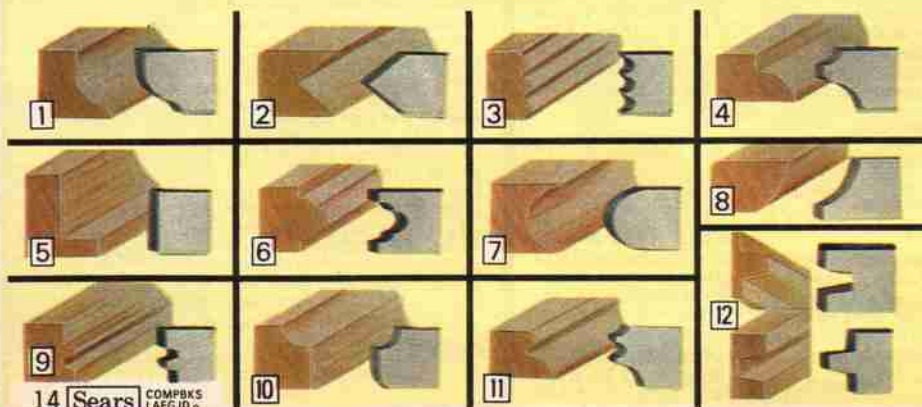

Our popular **CRAFTSMAN®** 6½-inch Jointer-Planer has 3 high-speed, ground-steel knives... dresses wood up to 6 inches wide to give you smooth surfaces on rough stock

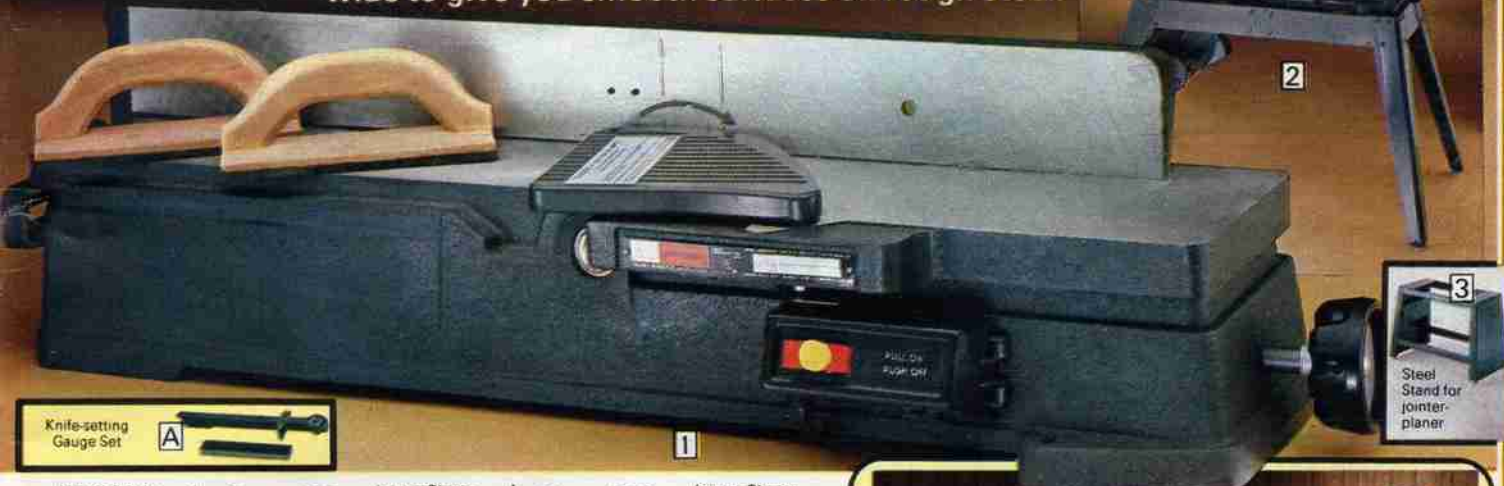

Jointer-Planer alone
\$289.95

Save \$21
Separate prices
total \$345.94

Jointer-Planer with motor
\$324.94

Save \$39
Separate prices
total \$378.93

Jointer-Planer, motor, leg set
\$339.93

MOTOR: 3450-rpm, ½-HP motor (9 GT 1216C). Induction-run, capacitor start increases starting torque while reducing actual starting current required. Pre-lubricated sleeve bearings. Base with 3x4¼-in. mounting (NEMA 56 frame).

CAPACITY, CONST: Cutter head revolves on permanently lubricated ball bearings. 3 precision-ground steel knives cut up to ½ inch deep by raising and lowering infeed table. Cutter guard covers knives. Makes up to 12,900 cuts per minute. 1-piece cast-iron bed and outfeed table. Cast-iron fence has single locking knob for bevel and lateral adjustments... also positive stops at 45° and 90°. Fence has pre-cast holes to allow for addition of auxiliary facing (not included) for jointing wide boards more accurately. Built-in scale shows degree of fence tilt. 40°x20°x9¾ in. high.

LEG SET, ACCESSORIES: Steel leg set with adjustable, leveling feet... rubber pads resist creeping. Includes motor mount, 2 wood hold-down, push blocks with contoured handles and rubber gripping pads, V-belt machine and motor pulleys. Belt guard. Leg set is shipped unassembled.

ELECTRICAL INFORMATION: Tool is UL listed and meets "UL Standard 987 for Safety." Lockable pull-on/push-off power switch, 6-foot, 3-wire cord. Receptacle for 115-v., motor. Motor runs on 115-v., 60-Hz. AC. 720 full-load input watts. 4-ft., 3-wire cord.

CUTTING BLADE, CAPACITIES: 12-inch blade. Lower blade guard. Rear-located depth of cut and miter controls. Blade and motor swivel up to 27 in. wide for out-ripping. Crosscuts up to 16 in. wide in 1-in. stock. Maximum depth of cut is 4 in. at 90°, 2⅞ in. at 45°. Fixed miter stops at vertical, 45° and horizontal. Anti-kick-back pawls help reduce chance of wood kicking back. Automatic blade brake.

ARM CONSTRUCTION: Motor and blade carriage ride on 4 permanently lubricated ball bearings in 2 machined tracks. Cast-iron arm and column support. Heavy "Deep-Beam" arm is super-rigid. Column is cadmium plated.

ORDERING INFORMATION: See warranty, p. 14, order safety goggles sold separately on p. 57.

(1) **Jointer-Planer alone.** Without motor or leg set. 9 GT 2068N—Shipping weight 126 pounds. \$289.95

Jointer-Planer, Motor (not shown). Without leg set. 9 GT 20681N2—Shipping weight 143 lbs. \$324.94

(2) **Jointer-Planer with Motor and Leg Set** 9 GT 20693N3—Shipping weight 173 lbs. \$339.93

Steel Leg Set for jointer-planer. Leg set as described at left, shown in combination (2) above.

ORDERING INFORMATION: Shipped unassembled. 9 GT 22245C—Shipping weight 30 lbs. \$32.99

(3) **Steel Stand for jointer-planer** **CONSTRUCTION:** Heavy-gauge steel. Adjustable, leveling feet with rubber pads to resist creeping. Height adjusts. Motor mount included. Top measures 37½x15¼ in. wide.

ORDERING INFORMATION: See "N" suffix, page 69. 9 GT 22216N—Shipping weight 43 lbs. \$42.99

Extra Push Blocks for jointer-planer. Same as those described at left and shown in combination (1) above.

ORDERING INFORMATION: Set of 2. 9 GT 2298—Shipping weight 9 oz. \$7.99

Extra Cutting Knives (not shown). Precision-ground steel. For replacing knives in Sears jointer-planers. **ORDER INFO:** Order knife-setting gauge set below.

6½-inch Cutting Knives. Fits jointer-planer above and most other 6½-inch Craftsman jointer-planers. Package of 3. 9 GT 2293—Shipping weight 13 oz. Package \$10.99

4¾-inch Cutting Knives. Fits old Craftsman 4¾-inch jointer-planers. Package of 3. 9 GT 2291—Shipping weight 8 oz. Package \$9.49

4½-inch Cutting Knives. Fits old Craftsman jointer-planers 9-2180, 9-2184 and 9-2186. Package of 3. 9 GT 21866—Shipping weight 5 oz. Package \$7.49

(A) Knife-setting Gauge Set. For installing new or resharpened cutter knives. Cast-iron gauge with micrometer adjustments. Includes blade touch-up stone. 9 GT 2647—Shpg. wt. 1 lb. 10 oz. Set \$15.99

WORKTABLE: Chipboard, 29¾x38½x1 in. **STAND:** Steel. Top is 26x32 in. Positions worktable 33 in. from floor. Gray, wrinkle finish. **MOTOR:** 3425-rpm, continuous-duty 2-HP motor develops 5 HP and is totally enclosed. Fan cooled. Thermal low and no voltage overload protector meets OSHA (Occupational Safety and Health Act) requirements. ⅝-in. blade arbor accepts sanding discs, dadoes, molding heads, etc. See index for these and other accessories.

ELECTRICAL INFORMATION: Use only where 3-phase electrical power is available. Push-button, magnetic-type power switch with key lock (key included). Factory connected for 208-240 volt, 3-phase, 60-Hertz AC use... can be reconnected for 480-volt use. With 8-foot, 3-wire cord.

ORDERING INFORMATION: Warranted by DeWalt. Write for free copy, see page 69. T9 GT 2319N—Shpg. wt. 265 lbs. \$875.00




YOU CAN DO IT

... with Sears powerful jointer-planer. It allows you to do the finishing that would be nearly impossible with any other tool. Your jointer-planer is the perfect companion to a radial or table saw because it lets you go a step beyond cutting a workpiece.

It is a must for truly professional-looking results in cabinet making and other types of fine woodworking. With a jointer-planer you can trim to size and smooth-plane square or bevel-angle joint edges for a tight, flush fit. You can also bevel or chamfer a decorative edge and plane certain sized surface areas to help alleviate imperfections. From kitchen cabinets and decorator shelving to butcher-block tables and other furniture, all it takes is a little know-how and you can do it!

After sawing, plane to exact size for proper fitting joints.

Smooth rough edges and surfaces

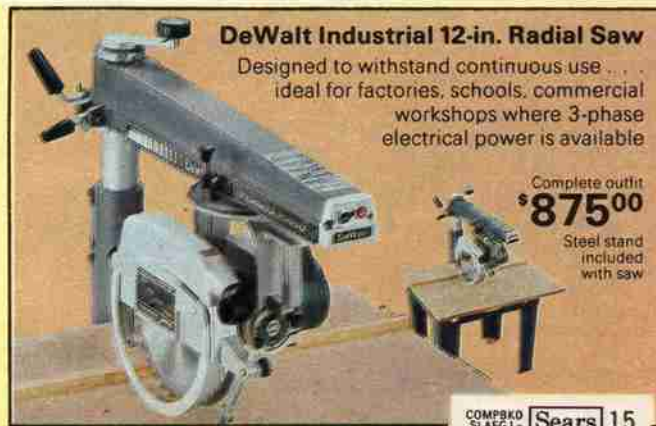

DeWalt Industrial 12-in. Radial Saw

Designed to withstand continuous use... ideal for factories, schools, commercial workshops where 3-phase electrical power is available

Complete outfit
\$875.00

Steel stand included with saw



CRAFTSMAN® Table Saws run quietly and are virtually

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



7½-in. Table Saw Outfit can be moved easily from job to job . . . weighs only 54 lbs. complete

Outfit includes motorized saw, 2 extensions and steel legs

\$174⁹⁵

Motorized saw with 2 extensions

\$149⁹⁵



An Outstanding Value for this complete 9-inch Table Saw Outfit . . . includes motorized saw, 2 extensions and steel legs

\$179⁹⁵

FULL ONE YEAR WARRANTY ON CRAFTSMAN STATIONARY POWER TOOLS:

If, within one year from the date of purchase, any CRAFTSMAN Stationary Power Tool fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply contacting the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CUTTING BLADE, CAPACITIES: 7½-inch combination blade cuts wood up to 1½ inches thick at 90° and 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 6¼ inches. Adjustable rip fence can be positioned to right of blade for rips up to 9½ inches wide. Aluminum blade guard. Spreader minimizes blade binding. Anti-kickback pawls.

TABLE: Aluminum. 14x14 inches wide.

EXTENSIONS: 2 included. Formed aluminum . . . 6x14 inches each. Attach to sides of saw table for a total surface measuring 14x26 inches. Attaching hardware included.

LEGS: Sturdy steel. Provide approximately 37-in. table height. Rubber padded leveling feet resist creeping. Unassembled.

MOTOR: Capacitor-start, induction-run, 3450-rpm direct-drive ½-HP motor develops 1 HP. Permanently lubed ball bearings.

ELECTRICAL INFORMATION: Pull-on/push-off lockable switch. 120-volt, 60-Hz. AC. 880 full-load input w. 6-ft., 3-wire cord. UL listed, meets "UL Standard 987 for Safety."

ORD. INFO: Warranty, above. Caster set, p. 32. Goggles, p. 57.

9 GT 24151L—Shipping weight 54 pounds . . . \$174.95

Saw above, without leg set.
9 GT 2415C—Shipping weight 32 pounds . . . 149.95

CUTTING BLADE, CAPACITIES: 9-inch combination blade cuts wood up to 2 inches thick at 90°, 1½ inches thick when tilted to 45°. Blade and motor tilt for bevel cuts. Adjustable bevel scale shows degree of blade tilt, has positive stops at 90° and 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 10½ inches. Easy-to-align, lift-off rip fence locks front and rear with one knob . . . can be conveniently lifted off and replaced at any point. Rip fence can be placed on either side of blade for rips up to 14½ inches wide on left side, up to 13½ in. wide on right side. See-thru blade guard stays in raised position for ease of blade changing. Spreader helps minimize blade binding. Anti-kickback pawls help reduce chance of wood kicking back.

TABLE: Solid cast-aluminum table for accurate cutting results. 17x20 inches overall.

EXTENSIONS: Two 10x20-inch formed steel extensions provide additional work surface, total work area of 37x20 inches. Attach to sides of saw, hardware included.

LEGS: Steel legs provide sturdy support. Rubber-padded leveling feet adjust to uneven or sloping floors, resist creeping. Attach to saw base with hardware included.

MOTOR: Built-in ¾-HP motor develops 1.6 HP. Blade mounts to motor shaft so there is no power loss by transmission. Capacitor-start, induction-run . . . no motor brushes to repair or replace, causes no television interference like saws with universal motors. Requires little maintenance. Permanently lubricated ball bearings. 3450 rpm.

ELECTRICAL INFORMATION: Pull-on/push-off power switch with removable locking key. Operates on 120-volt, 60-Hertz AC. 1050 full-load input watts. Includes 6-foot, 3-wire cord. UL listed, meets "UL Standard 987 for Safety."

ORDERING INFORMATION: See Full One Year Warranty above. Order safety goggles on page 57. Order caster set on page 32.

Shipping weight 96 pounds.
9 GT 24246N . . . \$179.95

maintenance-free because capacitor-start, induction-run motors have no noisy gears or brushes to repair or replace

Outfit with Our Best 10-inch Table Saw gives you these 7 features:

- 1 See-thru blade guard mounts on spreader and stays in raised position for easy blade changing
- 2 Machine-ground, cast-iron work table measures a full 20x27 inches without extensions
- 3 Exclusive Exact-I-Cut indicator shows you where the wood will meet the blade... means no trial and error cutting, reduced waste
- 4 Miter gauge is made of cast-aluminum rather than plastic
- 5 Self-aligning, lift-off rip fence locks front and rear with one knob... can be conveniently lifted off and replaced at any point
- 6 Pull-on push-off switch can be turned off quickly and easily and has built-in, lock-out key to help deter unauthorized use
- 7 Capacitor-start, induction-run motor is about 20 decibels quieter than a comparable universal motor. Our motor requires no brush or commutator maintenance

Save \$51.00

Outfit includes our best table saw, motor, two extensions and steel stand

Separate prices total **\$438.91**

\$387.91

Table Saw alone **\$279.95**

(1 thru 3) Outfit with Our Best 10-inch Table Saw plus motor

CUTTING BLADE, CAPACITIES: 10-in. combination blade cuts wood up to 3 $\frac{3}{8}$ inches thick at 90°, 2 $\frac{1}{4}$ inches thick at 45°. Blade, motor mount tilt for bevel cuts. Adjustable bevel scale shows degree of blade tilt, positive stops at 90°, 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 15 $\frac{1}{4}$ inches. Self-aligning rip fence can be placed to right of blade for rips up to 24 inches wide. Rip scale graduated in $\frac{1}{16}$ -inch increments. See-thru blade guard. Spreader helps minimize blade binding. Anti-kickback pawls help reduce chance of workpiece kicking back at operator.

TABLE: Machine-ground, cast-iron work table. 20x27 in. Exclusive Exact-I-Cut.

EXTENSIONS: Two extensions of heavy 16-gauge reinforced formed steel. 10x27 inches each. Attach to either side of table, hardware included.

STAND: Stamped steel with rubber-padded leveling feet... adjusts to uneven or sloping floors, resists creeping and marring of floors.

MOTOR: (9 GT 1217C). Capacitor-start, induction-run, 3450-rpm 1-HP motor develops 2 HP. Pre-lubricated sleeve bearings.

ELECTRICAL INFORMATION: Saw UL listed, meets "UL Standard 987 for Safety", pull-on/push-off locking switch, 6-foot, 3-wire cord, 115-volt receptacle for motor. Motor runs on 115-volt, 60-Hertz, A.C. 1250 full-load input watts.

ORDERING INFORMATION: See full one year tool warranty on opposite page. See motor warranty on page 30. Order protective goggles on page 57.

- 9 GT 29818N5—Complete Outfit (1 thru 3) plus Motor. Wt. 230 lbs. \$387.91
- (1) 9 GT 29814N—Saw alone. Shipping weight 147 pounds 279.95
- (2) 9 GT 29957C—Extension alone. Shipping weight 15 pounds 23.99
- (3) 9 GT 22214C—Stand alone. Shipping weight 32 pounds 42.99

Combination Dado/Molding Head Insert (not shown). For saw (1) above. For use with 7-inch diameter dado or molding head.

ORDERING INFORMATION:

- 9 GT 29997—Shipping weight 2 pounds 2 ounces \$7.49



YOU CAN DO IT

... with Craftsman Table Saws. Simplicity of design and ease of operation make these tools ideal for basic workshop needs of sawing lumber quickly to size. Do more with accessories on page 27. Make tenon cuts, spline cuts and dado cuts for accurate wood joints used in making tables, shelves, cabinets, picture frames, more. Using molding heads and cutters, add decorative edges to fine furniture. Sanding discs turn saw into disc sander. You'll be surprised at what you can do with your Craftsman table saw. All you need is a little know-how and You Can Do It!





With your CRAFTSMAN® Table Saw and Accessories

These Craftsman Table Saws have features that mean convenience for you:

- Capacitor-start, induction-run motor is quiet and has no noisy gears or brushes to replace
- New handwheels make table adjustments easy
- Self-aligning rip fence locks front and rear with just one knob
- Miter gauge for accurate angle cutting
- Side extensions give support when cutting long boards
- 24-inch rip capacity



Outfit \$489⁹⁵

12-inch Motorized Table Saw

Two extensions, steel legs and 2-HP motor that develops 3½-HP... cuts thru wood 3¾ in. thick at 90°, 2¾ in. at 45°

CUTTING BLADE, CAPACITIES: 12-inch Kromedge® blade cuts thru wood up to 3¾ inches thick at 90° and 2¾ inches thick when tilted to 45°. Blade and motor tilt for bevel cuts. New adjustable bevel scale has ½° increments, shows degree of blade tilt; positive stops at 90° and 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 16 inches. Self-aligning rip fence can be positioned to right of blade for rips up to 24 in. wide. Rip scale graduated in ¼-in. increments. See-thru blade guard. Spreader helps prevent blade binding in wood. Anti-kick-back pawls. Handwheels for easy adjustments.

TABLE: Machine-ground, cast-iron worktable. Measures 20x27 in. Exclusive Exact-I-Cut shows you where wood will meet blade.

EXTENSIONS: Two 16-gauge reinforced, formed steel extensions, each 10x27 inches. Attach to sides of table for a total work surface area of 40x27 in. Attaching hardware included.

LEGS: Sturdy steel. Positions saw table at proper working height. Rubber-padded leveling feet resist creeping, adjust to uneven or sloping floors. Sent unassembled.

MOTOR: Built-in capacitor-start, 3450 rpm 2-HP develops 3½ HP. Perm. lubed ball bearings. Manual reset overload protector.

ELECTRICAL INFORMATION: Pull-on/push-off safety switch, removable key. 6-ft., 3-wire cord. UL listed, meets "UL Standard 987 for Safety". 240-v. only, 60-Hz. AC. 1650 full load input watts.

ORD. INFO: Warranty above. Order casters (6) sold below, right. 9 GT 2425N—Shipping weight 226 pounds.....\$489.95

(1) Combination Dado/Molding Head Insert. For 12-inch table saw above. Use with 7, 8-inch diam. dado or 7-in. molding head sets. **ORDERING INFORMATION:**

9 GT 29997—Shipping weight 2 pounds 2 ounces.....\$7.49



For more information on CRAFTSMAN Stationary Power Tools and Accessories, send for **FREE BOOKLET** 39 GT 7499

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

10-inch Motorized Table Saw

2-HP motor develops 3½-HP... cuts thru wood up to 2½ in. thick at 90°, 2¼ in. thick at 45°

Motorized Saw alone \$209⁹⁵

Motorized Saw with two extensions and stand

Save \$27.00 Separate prices total \$296.92 **\$269⁹²**

(2 thru 4) 10-inch Motorized Table Saw Outfit

CUTTING BLADE, CAPACITIES: 10-in. combination blade cuts wood up to 2½ in. thick at 90°, 2¼ in. thick at 45°. Blade and motor tilt for bevel cuts. New adjustable bevel scale has ½° increments, shows degree of blade tilt, has positive stops at 90°, 45°. Aluminum miter gauge slides in grooves on either side of the blade. Table surface in front of blade at 1-in. cutting depth is 10-in. Self-aligning rip fence can be positioned to right of blade for rips up to 24 in. wide. Rip scale graduated in ¼-in. increments. See-thru blade guard. Spreader minimizes blade binding. Anti-kickback pawls help minimize kickbacks.

TABLE: Reinforced cast-aluminum. Measures 17x20 inches.

EXTENSIONS: Two reinforced formed steel extensions. 10x20 inches each. Attach to sides of table with hardware included.

STAND: Stamped steel with rubber-padded leveling feet. Adjusts to uneven floors. Sent unassembled.

MOTOR: Capacitor-start, induction-run, 3450 rpm, direct-drive 1-HP motor develops 2-HP. Permanently lubricated ball bearings. Manual reset overload protector.

ELECTRICAL INFO: Pull-on/push-off switch with locking key. 120-volt, 60-Hz. AC. 1230 full-load input watts. 6-ft., 3-wire cord. UL listed, meets "UL Standard 987 for safety".

ORDERING INFO: Warranty pg. 16, "N" suffix, pg. 82.

9 GT 29574N4—(2 thru 4) Outfit. Wt. 135 lbs.\$269.92

9 GT 2957N—(2) Motorized Saw alone. 82 lbs. 209.95

9 GT 29954—(3) Extension. Wt. 10 lbs. 8 oz. Each 21.99

9 GT 22214C—(4) Stand alone. Wt. 32 lbs. 42.99

(5) Combination Dado/Molding Head Insert. For (2) 10-inch saw. Use with 7-in. dado; molding head.

ORDERING INFORMATION: Shipping wt. 2 lbs. 2 oz. 9 GT 29933.....\$7.49

(6) Caster Set for Table Saws. Fit all Craftsman leg sets, stands and cabinets for Craftsman® power tools.

ORDERING INFO: Set of four. Shipping wt. 6 lbs. 11 oz. 9 GT 22208.....Set \$21.99



you can sand, shape dado and more



(1) Adjustable Extension

Increases work space by up to 400 square inches. 20-in.

ORDERING INFORMATION: Fits all Craftsman table saws except 9-2415, 9-24151, 9-2413, 9-2419, 9-24192, 9-2958, 9-29582.
9 GT 2178—Wt. 12 lbs. . . \$22.99

(2) Table Saw Extensions

Mounts sides of table saw. Formed steel. Hardware incl. SIZES AND ORDERING INFO:

10x20 inches. Fits saws 9-2914, 9-2411, 9-24114, 9-2419, 9-24192, 9-2404, 9-24042, 9-2958, 9-29582, 9-24246, 9-2424, 9-29575, 9-2957, 9-2414, 9-24141. Order kit below to fit saws 9-2428, 9-24281, 9-24282. Wt. 10 lbs. 8 oz.

9 GT 29954 \$21.99

10x27 inches. Fits saws 9-2912, 9-29914, 9-29904, 9-2418. Order kit below to fit saws 9-29911, 9-2994, 9-2996, 9-2993, 9-2995, 9-2997, 9-29913, 9-29803, 9-29813, 9-29815, 9-29814, 9-2425.

9 GT 29957C—Wt. 15 lbs. . . \$23.99

Saw Adapter Kit for (2) above

9 GT 29999—Wt. 1 lb. . . \$5.49

(3 and 4) CRAFTSMAN® Extension Tables

Choose either back or side extensions. CONSTRUCTION: Both tables provide additional support for cutting and ripping long stock or paneling. Aluminum tops resist rust and corrosion. Telescoping, double-channel legs adjust individually to uneven or sloping floors . . . tighten with wing nuts. Tops and legs are angle braced for additional strength and support. Attaching hardware is included. Both tables can be removed for storage by pulling out pin retainer. Side extension table can also fold down out of the way.

(3) Improved Side Extension Table Mounts on left or right side of all Craftsman table saws and radial saws . . . fits most other saws. Now with Particle board top. Aluminum frame. 34x18 in. wide. 612 square inches of extra workspace.

9 GT 32789C—Wt. 15 lbs. . . \$24.99

(4) Back Extension Table Fits all Craftsman table saws . . . most other table saws. Aluminum top measures 1½x17x24 in. along edge. Gives you 408 sq. in. of extra work space.

9 GT 32777C—Wt. 7 lbs. . . \$24.99

(5) Picture Framing Kit

KIT INCLUDES: Adjustable aluminum framing clamp which holds 4 frame sections for proper tension for glueing; adjusts from 4x4-in. minimum to 35x35 or to 23x47-in. maximum. X-acto mat cutter sold on page 48, to cut mats at 45° or 90° angle. Adj. depth, plastic body, blade lock. Miter square to hold frame sections for precise square joint cuts without adjustment.

ORDER INFO: Sep. prices total \$43.87. Wt. 11 lbs.

9 GT 32059C . . . Kit \$39.99

Adjustable Framing Clamp. Aluminum frame with four clamps. See description above in Picture Framing Kit (5).


ORDER INFO: Wt. 5 lbs. 13 oz.

9 GT 32054 \$16.99

Miter Square. See complete description above in Picture Framing Kit (5).

ORDER INFO: Wt. 3 lbs. 10 oz.

9 GT 3216 \$19.99

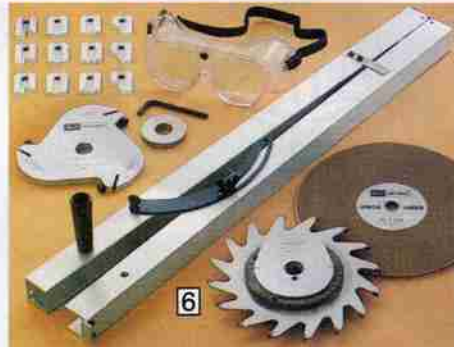

(6) CRAFTSMAN® Accessory Kit for Table Saws

Save \$16.22 Separate prices total \$76.21 \$59.99

KIT INCLUDES: Adjustable dado (9 GT 3263) page 27. Fits 9, 10, 12 or 14-inch table saws with ½-in. round arbors. 7-inch diameter with 16 teeth. Dadoes up to 1½ in. deep and ¾ in. to 1¼ in. wide. Adjustable hub lets you dial width without removing dado. Triple-cutter Molding Head (9 GT 3214) on pg. 27. Fits 9, 10, or 12-in. table saws with ¾ or ¾-in. round arbors. . . 7-in. diameter. Four Cutter-bit Sets; 3-pc. Cabinet Door Lip (9 GT 3253) on pg. 27; 3-pc., 3-bead (9 GT 3252) on pg. 27; 3-pc., ½-in. Cove and Bead (9 GT 3212) on pg. 27; "Ogee" Window and Door Stop on pg. 27. Taper Jig (9 GT 3233) on pg. 19. Lets you cut tapers up to 3 in. per foot or 15°. 8-inch Sanding Wheel (9 GT 2274) on pg. 28. Two medium-grit sanding surfaces; one flat, one with 2" taper. Fits ¾ or ½-in. arbors. Flexible Mask Goggles (9 GT 1859) on pg. 57. Fit over personal glasses . . . elastic strap adjusts.

ORDERING INFORMATION:

9 GT 32783—Shpg. wt. 9 lbs. 13 oz. . . \$59.99



(7) Table Saw Inserts

Dado Insert

SIZES, CONSTRUCTION

ORDER INFORMATION:

For 12-in. saws 9-2418, 9-29913, 9-2993. Steel; adj. to table surface. For 8-in. dado head. Wt. 1 lb. 10 oz.

9 GT 29935 Ea. \$7.49

For 8-in. saws 9-2428, 9-24282. (Not shown.) Steel; adjustable to table surface. For 6-in. dado head. Wt. 1 lb.

9 GT 29937 Ea. \$6.99

For 7½-in. saws 9-2421C, 9-2413C, 9-2415, 9-24151. Aluminum; no adjustment necessary. For 6-in. dado head.

Shipping wt. 5 oz.

9 GT 24211 Ea. \$3.50

Molding Insert

SIZES, CONSTRUCTION,

ORDER INFORMATION:

For 8-in. saws 9-2428, 9-24282. Steel; adjustable to table surface. For 4¾ and 5½-in. molding heads.

Shipping wt. 15 oz.

9 GT 29938 Ea. \$6.99

For 7½-in. saws 9-2421, 9-2413, 9-2415, 9-24151. (Not shown.) Aluminum; no adjustment necessary. For 5½-in. molding head. Wt. 5 oz.

9 GT 24212 Ea. \$3.50

Combination Dado-

Molding Insert. Steel construction.

Insert adjustable to table surface.

For 7-inch dado and 7-inch molding heads.

SIZES, CONSTRUCTION

AND ORDERING

INFORMATION:

For 12-inch saws 9-2418, 9-29913, 9-2993. Not shown.

Shipping weight 1 lb. 10 oz.

9 GT 29995 Ea. \$7.49

For 12-in. saw 9-2425 (fits 7 and 8-inch dado when used in 12-inch saw) and 10-in. saws 9-29814, 9-29803, 9-29815. Not shown.

Shipping weight 2 lbs. 2 oz.

9 GT 29997 Ea. \$7.49

For 10-in. saws 9-2990, 9-2994, 9-2996, 9-29911, 9-29912, 9-29904, 9-29914. (Not shown.)

Shipping weight 1 lb. 15 oz.

9 GT 29994 Ea. \$7.49

For 10 and 9-in. saws 9-2404, 9-24042, 9-2958, 9-29582, 9-2419, 9-24192.

Shipping weight 2 lbs. 2 oz.

9 GT 29933 Ea. \$7.49

For 9-in. saw 9-2414. Not shown.

Shipping weight 1 lb. 2 oz.

9 GT 29934 Ea. \$4.99

For 9-in. saws 9-2411, 9-24114.

Shipping weight 2 lbs. 2 oz.

9 GT 24213 Ea. \$4.49



(8) CRAFTSMAN® Multi-purpose Jig. Fits over fence of Sears table saws, others.

USES: For tenons and regular cuts. Has 45° slot for checking blade tilt. Measures height in ¼-inch increments. Attach wood (not included) on side for mortises and tenons.

CONSTRUCTION: Hi-impact plastic.

ORDERING INFO:

Shpg. wt. 1 lb. 2 oz.

9 GT 32778 \$6.99

(9) CRAFTSMAN® Universal Jig. Fits ¾-in. wide x ¾-in. deep miter groove.

USES: For regular cuts, dadoes and joints like tenons, etc. For material up to 2 inches thick.

CONSTRUCTION: Incl. two die-cast plates and two aluminum clamps with carbide-tipped, 8-tooth, 8-inch blade.

ORDERING INFO:

Shpg. wt. 5 lbs. 12 oz.

9 GT 3235 \$24.99

(10) Hold-down Clamp for Miter Gauge (11). Also for use with most Craftsman miter gauges except those with saws 9-24151 and 9-2415C.

USES: For all types of bevel and miter cuts. Clamps stock firmly to miter gauge.

CONSTRUCTION: Steel.

ORDERING INFORMATION:

Shipping weight 1 lb. 12 oz.

9 GT 29928 \$14.50

(11) CRAFTSMAN® Miter Gauge with positive stops at 90° and 45°.

Fits most table saws with ¾x¾-in. deep miter grooves. Positive stops at 90° and 45°; right, left.

CONSTRUCTION: Die-cast, accurately machined aluminum head. Steel degree indicator.

ORDERING INFORMATION: Order clamp (10) above and stop rods (12) below separately. Not for former saw 9-2413C.

Shipping weight 3 lbs. 2 oz.

9 GT 29929 \$16.99

(12) Stop Rods for Miter Gauge (11). Steel construction.

ORDERING INFO: Not for saw 9-24151 or 9-2415C. Wt. 15 oz.

9 GT 29924 \$5.50

(13) CRAFTSMAN® Taper Jig. Tapers up to 3 in. per ft. or 15°. Allows you to duplicate taper ripping.

CONSTRUCTION: Extruded aluminum with locking brackets, handle and scale in degrees of taper and inches per foot for accurate work.

ORDERING INFORMATION:

Shipping wt. 2 lbs. 4 oz.

9 GT 3233 \$8.99

(14) Table Saw Guard Assembly

CONSTRUCTION: Clear plastic, aluminum.

ORDER INFO: Fits former 9-2990, 9-29911N, 9-2992N, 9-2994N, 9-2999N. Wt. 4 lbs.

9 GT 29906 \$22.49

CRAFTSMAN® Power

Tool Handbook. Features

instructions on use of table

saw. Includes chapters on

dado, molding and sanding

operations. Also sections on

band saw, drill press, wood

shaper etc. Over 600 opera-

tions described. 207 pages.

ORDER INFO: Wt. 14 oz.

9 GT 2918 \$5.99

You can do it . . . with CRAFTSMAN Table Saws and Accessories. Take advantage of cross-cutting and ripping large . . . boards accurately with your table saw. Then add the accessories sold on this page and make all kinds of projects. Create beautiful picture frames for gifts or to display in your home, with our complete picture framing kit. Add our adjustable dado and insert and you can turn out professional-looking bookcases. You can even make swinging cabinet doors for those bookcases with our cabinet door lip bit. You'll be surprised at what you can do with your Craftsman Table Saw and Accessories. All you need is a little know-how and you can do it!



YOU CAN DO IT



CRAFTSMAN® Radial Saws allow accurate

(1) CRAFTSMAN® 12-inch Radial Saw

- 2-HP motor develops 3 1/2-HP
- Crosscuts up to 1 1/2 inches wide in 1-inch stock
- Cuts through wood 4 inches thick at 90°
- Up-front controls for ease of operation and fast set-ups
- Automatic blade brake


Saw alone \$489⁹⁵

1

For more information on CRAFTSMAN® Stationary Power Tools and Accessories, send for free booklet 39 GT 7499

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

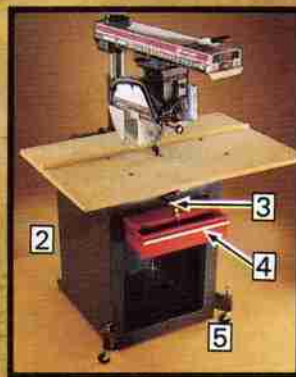

MOTOR: Capacitor start, 3450-rpm 2-HP motor develops 3 1/2-HP. Direct-drive, induction-run for quiet, low-maintenance operation. Permanently lubricated ball bearings. Automatic blade brake. Thermal overload protector. Double-end shaft, 5/8-in. arbor, 1/2-20 threaded accessory end.

CUTTING BLADE, CAPACITIES: 12-inch Kromedge® blade. Depth of cut, bevel and miter controls mounted up front for fast set-ups. Retractable lower blade guard. Blade and motor swivel for 26-inch rip capacity. Crosscuts up to 1 1/2 inches wide in 1-inch stock. Maximum depth of cut 4 inches at 90°, 2 1/16 inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader helps check blade binding. Anti-kickback pawls help reduce chance of wood kicking back.

CONSTRUCTION: Motor and carriage glide along replaceable steel trackways on sealed ball bearings. . . no need to replace entire arm due to wear from carriage bearings, simply replace trackways. Cast-aluminum arm and column support. Machined steel column. Chipboard work table resists wear and warping. . . 27 1/2x44x1 in. thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key helps prevent unauthorized use. Runs on 240-v., 60-Hz. 1650 full-load input watts. 6-ft., 3-wire cord. UL listed, meets UL Standard 987 for Safety.

ORDERING INFORMATION: See Full One-year Warranty, opposite page. Saw Stand and Stand Components sold separately below. Order safety goggles on page 57.

9 GT 1979N—Shpg. wt. 170 lbs. \$489.95

Radial saw Stand and Components

(2) Stand for radial saw

Steel . . . provides stable support. 24x25x32 3/4 in. high. Rubber-padded leveling feet resist creeping; adjust to uneven floors. Baked charcoal gray enamel finish. Sent unassembled.

ORDER INFO: Order stand components (3 thru 5) separately. Shpg. wt. 57 lbs. 9GT22205L \$52.99

(3) Locking panel for stand (2)

Steel with red enamel finish. Slides inside of stand when open, covers front of stand when closed. Lock and 2 keys included.

ORD INFO: Wt. 11 lbs. 9GT10335C \$12.99

(4) Drawer for stand (2)

Heavy-gauge steel with red enamel finish. Glides smoothly on compound-action steel slides. Aluminum pull. Measures 16 7/8x15 3/4x4 7/16 in. deep.

ORDERING INFO: Shpg. wt. 9 lbs. 9 GT 10326 . . . \$11.99

(5) Caster Set

Fits all Craftsman leg sets, stands and cabinets. 2 1/2-inch diameter front casters swivel . . . T-handle for raising and lowering; rear 3-inch diameter casters are non-swivel. Plastic wheels in steel frame. Supports up to 400 pounds.

ORDERING INFO: Set of four. Shpg. wt. 6 lbs. 11 oz. 9 GT 22208 . . . \$21.99



YOU CAN DO IT

. . . with Sears Radial Saws. Their versatility enables you to undertake a wide range of projects. Whether you're constructing a workbench or doing intricate cabinet work, our radial saws will make the job easier. They allow you to crosscut, rip, bevel and miter quickly and accurately without changing the location of the saw in your workshop. Do even more with accessories listed on page 22. Cut your own molding or perform decorative cuts on edges and flat surfaces of furniture and cabinet projects with optional dado and molding heads. Threaded motor shaft accepts chuck and adapter for drilling and routing operations; buffing and polishing wheels for fine finishing work on metal parts. You'll be surprised at what you can do with your CRAFTSMAN® Radial Saw. All you need is a little know-how and you can do it!



20 Sears CRAFTSMAN

CRAFTSMAN® Extension Table

For radial and table saws . . . particle board top gives you 612 square inches of extra work space for sawing long stock or paneling

\$24⁹⁹

CONSTR: 612-sq. in. particle board top with 1 1/2-in. aluminum frame. Telescoping, double-channel legs adjust to uneven floors. Angle-braced for strength. Folds down or removes for storage. Mounts on left or right side of all Craftsman table saws, radial saws. Top is 3/4x34x18 in. wide.

9 GT 32789C—Shpg. wt. 15 lbs. . . . \$24.99

CRAFTSMAN® Kromedge® 12-inch steel Blades

Save 15% over reg. each price

Separate prices total \$26.97 \$22⁹²

Package of 3 blades includes 1 blade each: Master Combination (9 GT 32499); Chisel-tooth Combination (9 GT 32702); Crosscut Plywood (9 GT 32451).

ORD. INFO: See details of blades, p. 28. 9GT32351—Wt. 9 lbs. 1 oz. . . . Pkg. \$22.92



Folds down for storage



crosscutting, beveling, mitering and ripping



Our Best 10-inch Radial Saw

- 1 1/2-HP motor develops 2 1/2-HP
- Cuts through wood up to 3 in. thick at 90°
- Crosscuts up to 15 1/2-in. wide in 1-in. stock
- Up-front controls for ease of operation
- 26-inch rip capacity

Saw alone
\$379⁹⁵

Saw with light, stand, locking front panel, drawers and casters
Sep. prices in our 1978 Fall Big Book and this book total \$508.88
\$479⁸⁸

*Sears * Best*



10-inch Radial Saw with 1-HP motor has 25 1/2-inch rip capacity

Saw alone
\$309⁹⁵

- Cuts through wood up to 3 inches thick at 90°
- Crosscuts up to 15 1/2 inches wide in 1-inch stock
- Up-front controls for ease of operation and fast set-ups

Saw with cabinet stand, casters, worklight and steel legs
Sep. prices in our 1978 Fall Big Book total \$379.92
\$359⁹²

Single control lever for miter arm releasing, auto-indexing and locking. Our largest, easy-to-read miter and bevel scales with staggered height single-degree lines allow quick, accurate settings.

MOTOR: Capacitor-start, 3450 rpm, 1 1/2-HP motor develops 2 1/2-HP. Direct-drive, induction-run. Automatic blade brake stops blade in seconds when power is turned off. Thermal overload protector. Double-end shaft; 5/8-inch arbor, 1/2-20 threaded accessory end.

CUTTING BLADE, CAPACITY: 10-inch Kromedge® blade. Up-front depth of cut, bevel, miter controls. Blade and motor swivel for 26-inch rip capacity. Crosscuts up to 15 1/2 inches wide in 1-inch stock. Maximum depth of cut is 3 inches at 90°, 2 1/4 inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader helps check blade binding. Anti-kickback pawls help reduce chance of wood kicking back at operator.

CONSTRUCTION: Motor and carriage glide along replaceable steel trackways on sealed ball bearings. Cast-aluminum arm, column support; machined steel column. Chipboard table resists wear, warping . . . measures 27 1/2x40x1 inch thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key to help prevent unauthorized use. Factory wired for 120-volts, 60-Hz. AC . . . change quick-connect terminals and replace plug with 240-volt type to use 240-volts 1050 full load input watts. 6-foot, 3-wire cord. UL listed, meets "UL Standard 987 for Safety".

ORDERING INFORMATION: See warranty below. Order goggles on page 57. Accepts 7-inch diameter, 1 1/16-inch width dado (not included).

Shipping weight 150 pounds.
9 GT 1977N \$379.95

Our best 10-inch Radial Saw with worklight, stand, locking front panel, 3 drawers and casters

Includes saw above plus: heavy-gauge steel cabinet stand (9 GT 22205), locking front panel (9 GT 10335), 3 drawers (9 GT 10326), set of 4 casters (9 GT 22208), 18-inch flexible neck light (9 GT 2480).

ORDERING INFORMATION: Stand sent unassembled.

Shipping weight 255 pounds.
9 GT 19779N8 Outfit \$479.88

MOTOR: Capacitor-start, 3450 rpm, 1-HP motor develops 2-HP. Direct-drive, induction-run. Manual blade brake. Double-end shaft; 5/8-inch arbor, 1/2-20 threaded accessory end.

CUTTING BLADE, CAPACITY: 10-inch Kromedge® blade. Up-front depth of cut, bevel and miter controls. Blade and motor swivel for 25 1/2-inch rip capacity. Crosscuts up to 15 1/2 inches wide in 1-inch stock. Maximum depth of cut is 3 inches at 90°, 2 1/4 inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45°, horizontal. Blade guard, spreader. Anti-kickback pawls help reduce chance of wood kicking back at operator.

CONSTR: Motor moves along replaceable steel trackways on sealed ball bearings. Cast-aluminum arm. Chipboard table, 27 1/2x40x3/4 in.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key. Runs on 120-volts, 60-Hz. AC. 1100 full-load input watts. 6-foot, 3-wire cord. UL listed, meets "UL Standard 987 for Safety".

ORDERING INFORMATION: See warranty below left. Order safety goggles on page 57. Accepts 7-inch diameter, 1 1/16-inch width dado (not included).

9 GT 1976N—Shipping weight 140 pounds \$309.95

10-inch Radial Saw with cabinet stand, cabinet, worklight

Includes saw above plus: radial saw cabinet stand (9 GT 22205), 18-inch flexible neck worklight (9 GT 2480) and set of 4 casters (9 GT 22208).

ORDERING INFORMATION: Stand sent unassembled.
9 GT 19763N4—Shipping weight 207 pounds Outfit \$359.92

10-inch Radial Saw with 1-HP motor has 25-inch rip capacity

MOTOR: Capacitor-start, 3450 rpm, 1-HP motor develops 2-HP. Direct-drive, induction-run. Manual brake. Double-end shaft with 5/8-in. arbor, 1/2-20 threaded accessory end.

CUTTING BLADE, CAPACITY: 10-inch Kromedge® blade. Rear-mounted depth of cut and miter controls. Blade and motor swivel for 25-inch rip capacity. Crosscuts up to 13 1/2 inches wide in 1-inch stock. Maximum depth of cut is 3 inches at 90°, 2 1/4 inches at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45°, horizontal. Blade guard with spreader. Anti-kickback pawls help reduce chance of wood kicking back.

CONSTRUCTION: Motor moves along replaceable steel trackways on sealed ball bearings. Cast-aluminum arm and column support, machined steel column. Chipboard worktable, 26x37 1/2x3/4 inch.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key. Runs on 120-volt, 60-Hz. AC. 1200 full-load input watts. 6-foot, 3-wire cord. UL listed, meets "UL Standard 987 for Safety".

ORDERING INFORMATION: See warranty below. Order goggles on page 57. Accepts 7-inch diameter, 1 1/16-inch width dado (not included).
9 GT 2316N—Wt. 105 lbs. \$199.95

FULL ONE YEAR WARRANTY ON CRAFTSMAN® STATIONARY POWER TOOLS

If within one year from the date of purchase, any Craftsman Stationary Power Tool fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply contacting the nearest Sears store or Service Center throughout the U.S. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.



- Cuts through wood up to 3 inches thick at 90°
- Crosscuts up to 13 1/2 inches wide in 1-inch stock

\$199⁹⁵



Bench Power
Tool Shop

Picture Framing Kit

\$34.99


Use your radial saw to make
precise picture frames quickly and easily

KIT INCLUDES: *Hold-down Clamp* grips frame sections for precise miter cuts. *Stop-length Gauge* makes repetitive cuts simple. *Aluminum Framing Set with 4 Clamps* holds frame sections at 90° angle for gluing. Adjusts from 4x4-inch minimum to 36x36-inch maximum. *X-Acto® Mat Cutter* lets you trim mat board at 45° or 90° angle.

ORDERING INFORMATION:

9 GT 32052C—Shipping weight 10 pounds Kit \$34.99

Radial Saw Accessories

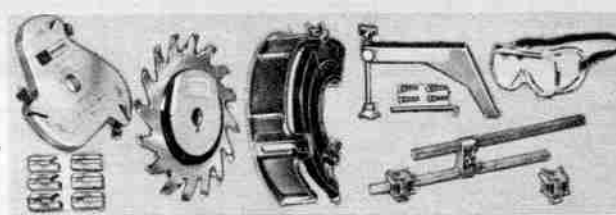

CRAFTSMAN®
Radial Saw
Accessory Kit

Save

\$19.23

\$59.99

KIT INCLUDES: *Triple-cutter Molding Head* (9 GT 3214) on page 27. 7-inch diameter. *Two 3-piece Cutter-bit Sets* on page 27. *Cabinet Door Lip Set* (9 GT 2353) and *1-inch Planer and Jointer Set* (9 GT 2302). *Adjustable Dado* (9 GT 3263) on page 27. 7-inch diameter, 16 carbide-tipped teeth. Dadoes to 1½ inches deep, 1¾ inch wide. *Molding Head/Dado Guard* (9 GT 29524). *Hold-down Clamp* (9 GT 29502) and *Stop-length Gauge* (9 GT 3242) described below. *Flexible Mask Goggles* (9 GT 1859) on page 57.

ORDERING INFORMATION: For 9, 10 and 12-inch radial saws with ¾ or 1-inch round arbors. Not for use on radial saws with universal motors. *Sep. prices total \$79.22.*

Shipping weight 9 pounds 8 ounces.

9 GT 32781

Kit \$59.99

Adapter (not shown). Use radial saw to drill or rout with ¼-in. diameter shank bits. Fits ¼-20 threaded ends.

ORDER INFO: Wt. 4 oz.

9 GT 3239 \$2.49

Molding Head/Dado Guards (shown in kit above). Must be used with molding cutters or dado blades when radial saw spindle is positioned vertically.

SIZES. ORDER INFO: Not for former saw 9-2922.

9 GT 29524—For up to 7-in. diam. Wt. 1 lb. 1 oz. \$9.99

9 GT 29523—For up to 8-in. diam. Wt. 1 lb. 8 oz. 9.99



(1) Key Chuck

Converts radial saw into on-the-spot drill or router. Just screw on chuck, insert bit.

CONSTRUCTION: Hardened steel. Nickel-chrome alloy jaws. Holds bits with ¼ to ½-inch diameter shanks. Chuck fits ½-20 threaded ends. Includes chuck key.

ORDER INFO: Order drill bits on page 58, router bits on pages 80 and 81.

9 GT 2980—Shpg. wt. 1 lb. \$7.89

(2) Buffing Wheel

CONSTRUCTION: 8-inch diameter. Spiral-sewn muslin with raked edges. Thirty layers thick, 64x64 threads per inch. For ½ or ¾-inch arbors.

ORDERING INFORMATION:

9 GT 64932—Shpg. wt. 8 oz. \$2.49

(3) Sanding Drum

CONSTRUCTION: 3-in. face, 2¼-in. diameter. Medium-grit sanding sleeve over expandable rubber drum. For ½-20 threaded ends. When using on drill press, order work arbor (9 GT 24645) sold on page 59.

ORDERING INFORMATION: Order replacement sanding sleeves on page 66.

9 GT 25246—Wt. 1 lb. 1 oz. \$5.99

(4) Rotary Surface Planer

Smooth rough, uneven work surfaces. Remove paint and varnish.

CONSTRUCTION: Die-cast aluminum body with air-flow design. Three carbide-tipped alloy steel blades plane up to 4-inch path. For radial saws with ¾-inch arbors.

ORDER INFO: Not for radial saw 9-2922.

9 GT 29513—Shpg. wt. 1 lb. \$15.99

Extra 3-pc. Blade Set for (4) above

9 GT 29531—Shpg. wt. 3 oz. Set \$6.99

(5) Adjustable Sawdust Collector

Exclusive at Sears. Reduces sawdust in the air, shavings and woodchips on the floor. Large shroud effectively traps dust from cross and bevel cuts. Adjusts to capture dust from miter cuts. Includes attachment for use during rip cuts.

CONSTRUCTION: High-impact styrene. Attaches easily to radial saw with aluminum brackets. Includes adapter to attach shop vac with 1¼ or 2½-inch diameter hose. Fits all Craftsman radial saws.

ORDERING INFORMATION:

Shipping weight 5 pounds 6 ounces.

9 GT 16999 \$19.99

(6) Hold-down Clamp

Exclusive at Sears. Holds workpiece firmly in place for smooth, accurate cuts. Remove a few screws from your radial saw worktable. Install hooks into existing holes. To use, simply catch foot of clamp in one of the hooks, position clamp over workpiece and tighten. Notched clamp holds even round workpieces. Includes clamp and 4 hooks. For use with radial saws only.

ORDERING INFORMATION:

Shipping weight 1 pound 7 ounces.

9 GT 29502 \$9.99

(7) Hold-down Attachment Set

Holds workpiece firmly during operations where it may be difficult to manually hold and guide work. Includes two clamps with four adjustable spring steel holding fixtures. Fits most radial saws, as well as many table saws, shapers and jointers.

ORDERING INFORMATION:

Shipping weight 2 pounds 11 ounces.

9 GT 3230 Set \$9.99

(8) Stop-length Gauge. Exclusive at Sears.

For making quick, simple repetitive cuts. Attach permanent clamps to either end of radial saw worktable. Insert ¾-inch dowel rod (not included) thru permanent clamp and bottom of adjustable clamp. Tighten. Slip second dowel rod (not included) thru top of adjustable clamp, set to desired width and tighten. No use, just butt workpiece against dowel. Includes one adjustable clamp and two permanent clamps. For use with radial saws only.

ORDERING INFORMATION:

Shipping weight 1 lb. 2 oz.

9 GT 3242 \$4.99

(9) Floating Ring Guard. Protects operator from sides of blade when saw is not cutting. Steel.

TYPES AND

ORDERING INFORMATION:

For former radial saws 9-2933, 9-2934, 9-2941, 9-2943 and 9-2944.

Shipping weight 1 lb. 7 oz.

9 GT 29007 \$11.99

For former radial saws 9-2945 and 9-2946. Shpg. wt. 1 lb. 7 oz.

9 GT 29008 \$12.99

(10) Retractable Lower Blade Guard. Protects operator from sides of blade when saw is not cutting. Clear-view plastic, aluminum frame. For 10-inch radial saws 9-1976, 9-1977, 9-2310, 9-2311, 9-2316.

ORDERING INFORMATION:

Shipping weight 1 lb. 5 oz.

9 GT 29009 \$14.99

(11) Double-jaw Miter Vise

Holds molding or frame sections up to 3 inches wide for 45° cuts. Ideal for making picture, door or window frames.

CONSTRUCTION: Cast-aluminum base and jaws. Steel screws. Fits most radial saws.

ORDERING INFO: Wt. 2 lbs.

9 GT 3279 \$11.99

(12) Carriage Return

Returns carriage to rear of arm after cutting. For 10, 12-in. radial saws except 9-2945, 9-23161.

ORDERING INFORMATION:

Shpg. wt. 1 lb. 6 oz.

9 GT 2956 \$17.99

CRAFTSMAN®
Power Tool
Book

\$5.99



Features instructions on use of the radial saw. Includes chapters on standard and special operations, use of accessories. Additional sections detail use of the band saw, drill press, wood lathe, wood shaper, stationary sander and planer. Handy woodworking tips are also included. Fully illustrated section on how to make over 32 different wood joints. Over 600 operations described. 224 pages.

ORDERING INFORMATION:

Shipping weight 15 ounces.

9 GT 2917 \$5.99

CRAFTSMAN®
Kromedge®
3-blade pack

Save
15%
over regular
separate
prices

\$14.84



CONSTRUCTION: Chrome-nickel-molybdenum steel fortified with chromium.

BLADES: One 10-in. *Master Combination Blade* (9 GT 32498) for crosscuts, miters in hard or soft wood; rips in all dry wood. One 10-in. *Chisel-tooth Combination Blade* (9 GT 32668) for all-purpose crosscuts, rips, miters in hard or soft wood. One 10-in. *Crosscut Plywood Blade* (9 GT 32446) for all-purpose cuts in Celotex® fiberboard, woods, veneers.

ORDER INFO: See individual blade details on page 28. *Separate prices total \$17.47.*

9 GT 32352—Wt. 5 lbs. 5 oz. \$14.84

Produces the smoothest cuts of any blade we offer. . . require little or no sanding.

CONSTRUCTION: 10-inch Kromedge® blade body. Alternately beveled, triple-ground carbide tips. Expansion slots. Standard rim construction lets you cut thick materials.

USES: Crosscuts, rips, miters, bevels. Ideal for thin, brittle materials; thicker stock as well. Fits ¾ or 1-inch arbors. Maximum cutting depth 1¼ in. Maximum rpm 4200. Not for use on ferrous metals or masonry.

ORDER INFO: For 10-inch or larger saws,

9 GT 32556—Wt. 2 lbs. 10 oz. \$49.99

Our best
CRAFTSMAN®
Tungsten
Carbide-
tipped
Blade

72 teeth
for satin-
like cuts

\$49.99





CRAFTSMAN®
Home-N-Shop Dry Vac
Holds ½ bushel
of dry debris **\$39.00**

MOTOR: Sealed ball and sleeve bearings for quiet operation.

FILTER: Semi-permanent paper filter cartridge removes for cleaning. For dry pick-up only.

TANK: Gold-color polypropylene plastic. Hinged, lift-off steel lid; plastic motor housing and handle. 18½ in. high, 15¼ in. diam. Four snap-in casters.

ACCESSORIES: Includes adapter for 1¼-in. diam. accessories; 1¼-in. diam., 6-ft. hose; utility nozzle. Use 1¼ or 2½-inch diameter accessories.

ELECTRICAL INFO: 110-120-v., 60-Hz. AC, 600 watts, 8-ft., 3-wire cord. UL listed.

ORDER INFO: Warranty below.
9 GT 17844L—Wt. 16 lbs. \$39.00

FULL ONE YEAR WARRANTY ON CRAFTSMAN® HOME-N-SHOP VACS: If, within one year from the date of purchase, any of these Craftsman Home-N-Shop Vacs fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the Home-N-Shop Vac to the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

2½-inch diameter Accessories

CONST: Plastic, (6) has rubber squeegee insert.

ITEMS. ORDERING INFORMATION:

Item	Description	Catalog Number	Shpg. wt. lbs. oz.	Price
(1)	Crevice Tool, Blower Nozzle and Dusting Brush Set	9GT16973	1 4	\$5.95
(2)	Flexible Hose*	9GT17818C	3	7.95
(3)	Extension Handle†	9GT16964	1 10	5.95
(4)	Auto Attachment	9GT16978	8	3.25
(5)	Dry Nozzle	9GT16925	1 3	6.75
(6)	Wet Nozzle	9GT17817	1 4	6.95

*6 feet long, includes connector for joining two hoses.

†Two pieces, measures 46 inches long assembled.

Attachment Kit. Separate prices total \$26.60.

Includes (1), (2), (3) and (5) above.

9 GT 16975C—Shipping weight 6 lbs. Kit \$24.50

1¼-inch diameter Accessories

CONST: Plastic, except vinyl plastic hose (8). Wet nozzle (13) has rubber squeegee insert.

ITEMS. ORDERING INFORMATION:

Item	Description	Catalog Number	Shpg. wt. lbs. oz.	Price
(7)	Crevice Tool	9GT17863	1 5	\$1.95
(8)	Flexible Hose**	9GT17866	1 12	6.45
(9)	Extension Handle	9GT17861	1 1	4.95
(10)	Auto Attachment	9GT17868	5	2.45
(11)	Utility Nozzle	9GT17867	7	2.25
(12)	Dusting Brush	9GT17862	6	2.45
(13)	Wet Nozzle	9GT17826	1	5.95
(14)	Dry Nozzle	9GT17825	15	5.95

**6 feet long. †Two pieces, 38 inches long assembled.

Attachment Kit. Sep. prices total \$21.25.

Includes (7), (9), (12), (13) and (14) above.

9 GT 17869—Shpg. wt. 3 lbs. 5 oz. Kit \$19.50

(15) Wet/Dry Filter Cartridge.

Semi-permanent. Stays in vac for wet or dry pick-ups. Just rinse to clean. Styrene rubber, wire screen, phenolic-impregnated paper. Fits all vacs on page except 9 GT 17844L. For former 9-1788, 9-1792, 9-17851 and 9-17855.

ORDERING INFORMATION:
9 GT 17809—Wt. 1 lb. 11 oz. \$5.95

(16) Dry Filter Cartridge

Fits 9 GT 17844L above.

ORDERING INFORMATION:
9 GT 17807—Wt. 1 lb. 8 oz. \$5.95

CRAFTSMAN® Home-N-Shop Wet/Dry Vac

Holds ½ bushel
of dry debris or
5 gallons
of liquid

\$79.00



MOTOR: Sealed ball and sleeve bearings. High-efficiency blower wheel. Converts to blower action. Suction automatically shuts off when tank is full during wet pick-ups. On-off switch and cord storage arm on motor housing.

FILTER: Semi-permanent paper filter cartridge removes for cleaning. Remains in vac for both wet and dry pick-ups.

TANK: Green plastic rustproof tank and snap-off lid. Neoprene foam rubber lid gasket. 25 in. high, 21 in. diameter.

ACCESSORIES: Includes adapter for 1¼-in. diam. accessories; 1¼-in. diam., 6-ft. flexible vinyl hose; utility nozzle; 4-caster dolly assembly. Use 1¼ or 2½-in. diam. accessories.

ELECTRICAL INFORMATION: 110-120-volt, 60-Hertz AC.

900 watts, 16-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: See warranty below.


9 GT 17885L—Shipping weight 23 pounds \$79.00

Six-piece Vac Outfit. Includes vac and accessories above plus extension handle (9), wet nozzle (13) below.

ORDERING INFORMATION: Separate prices total \$89.90

9 GT 17892L3—Shipping weight 26 pounds \$80.00

Accessories for Home-N-Shop Vacs



(17) Cloth Filter Bag

Fits former 9-1785, 9-17821, 9-17831 only. Use with paper bags (18) below.

ORDERING INFO:
Shpg. wt. 4 ounces.
9 GT 16967 \$2.45

(18) Paper Filter Bag

Use with cloth bag (17) above. Package of 5.

ORDERING INFO:
Shpg. wt. 4 ounces.
9 GT 16946 Pkg. \$1.95

Our most powerful CRAFTSMAN® Home-N-Shop Vacs tackle wet and dry clean-up jobs fast



In actual laboratory tests, these
vacs produced the following results:

NAIL TEST: Picked up
an average of 1600
(5.9 lbs.) ½-in.
roofing nails
in 15 sec.

SAWDUST TEST: Picked up ½ bushel
of fine, dry
sawdust in an
avg. of 6.8 sec.

GRAVEL TEST: Picked
up an avg. of 44 lbs.
of gravel (½-
in. avg. diam.)
in 30 sec.

WATER TEST: Picked
up 1 gallon of
standing water
in less than
1 second

Runs on 110-120 v.

Plugs into
this outlet

16-gallon size holds
1.8 bushels of dry debris
or 13 gallons of liquid

\$114.00

32-gallon size holds
3.5 bushels of dry debris
or 26 gallons of liquid

\$129.00

MOTOR: Sealed ball bearings for quiet operation and long life. High-efficiency blower wheel, patented bleed-off air vents and large exhaust port help generate high-velocity air flow for strong pick-up power. Converts to blower action when hose is placed in exhaust port. Suction automatically shuts off when tank is full during wet pick-ups. On-off switch conveniently mounted on side of motor housing.

FILTER: Semi-permanent paper filter cartridge has 3 times the filtration surface of most bag-type filters. Removes for cleaning . . . just rinse with water and return to vac. Remains in vac during both wet and dry pick-ups.

TANK: Red, high-impact polypropylene plastic . . . won't rust or dent; resists chipping, peeling and cracking. Black steel lid with red plastic motor housing. Neoprene foam rubber lid gasket retains its original shape even after numerous re-sealings to maintain positive seal against power robbing leaks. Tank lid snaps off for dumping dry debris. Side-mounted drain plug for easy emptying of liquids.

ACCESSORIES: Includes 2½-inch diameter, 6-foot flexible hose and utility nozzle. Vac rolls easily on 4-caster dolly assembly. Use 2½-inch diameter accessories sold at left.

ELECTRICAL INFORMATION: Double-insulated, never needs grounding . . . plugs into standard 2-prong outlet. 110-120-volt, 60-Hertz AC. 1200 watts, 16-foot, 2-wire cord. UL listed.

SIZES. ORDERING INFORMATION: See "N" suffix on page 69 and Full One Year Warranty above, left.



16-gallon tank size Vac . . . Sears Best. Measures 28¼ inches high, 22 inches in diameter.
9 GT 1787N—Shipping weight 35 pounds \$114.00

32-gallon tank size Vac (not shown). Measures 34¾ inches high, 26¼ inches in diameter.
9 GT 1793N—Shipping weight 37 pounds \$129.00



Bench Power
Tool Shop

Save \$159 to \$312 when you buy a

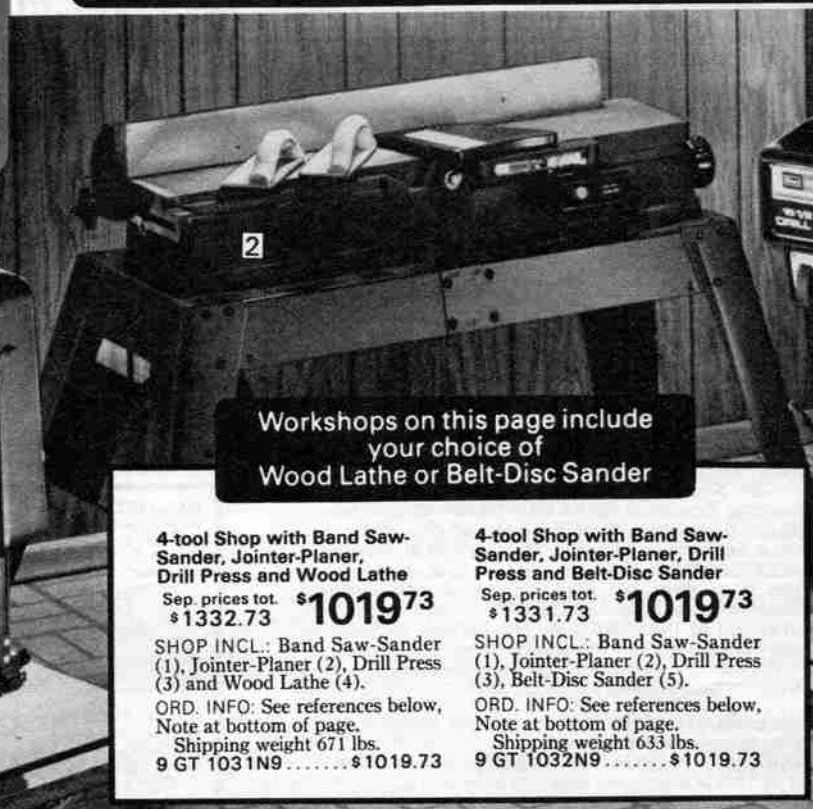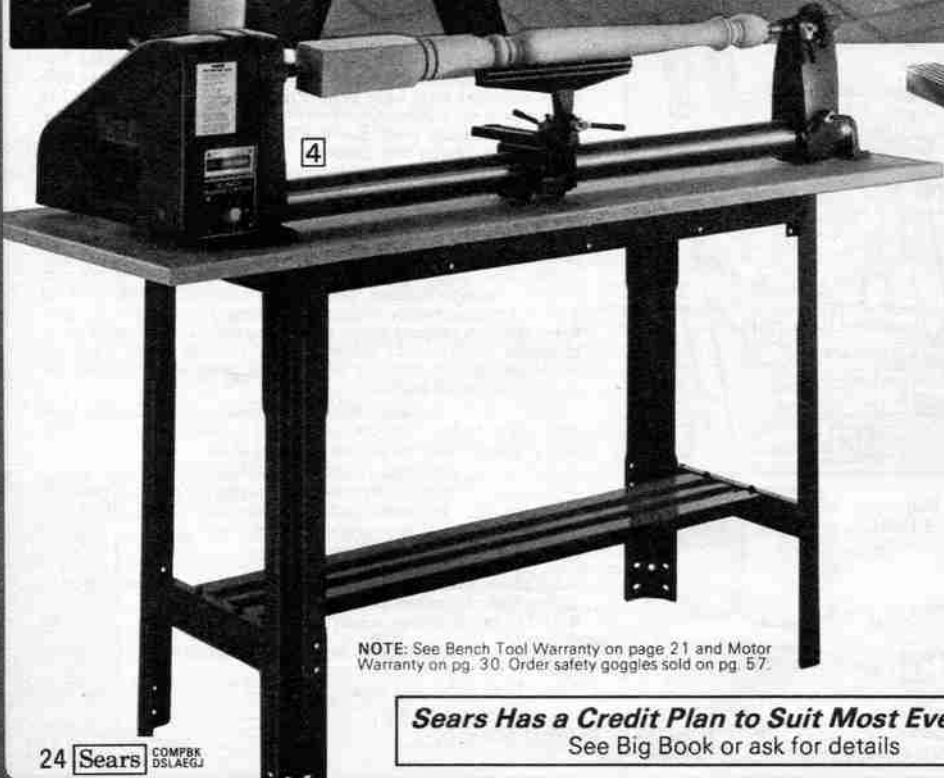

Workshops on this page include
your choice of
Wood Lathe or Belt-Disc Sander

4-tool Shop with Band Saw-Sander, Jointer-Planer, Drill Press and Wood Lathe

Sep. prices tot. **\$1019⁷³**
\$1332.73

SHOP INCL.: Band Saw-Sander (1), Jointer-Planer (2), Drill Press (3) and Wood Lathe (4).

ORD. INFO: See references below, Note at bottom of page, Shipping weight 671 lbs.

9 GT 1031N9 \$1019.73

4-tool Shop with Band Saw-Sander, Jointer-Planer, Drill Press and Belt-Disc Sander

Sep. prices tot. **\$1019⁷³**
\$1331.73

SHOP INCL.: Band Saw-Sander (1), Jointer-Planer (2), Drill Press (3), Belt-Disc Sander (5).

ORD. INFO: See references below, Note at bottom of page, Shipping weight 633 lbs.

9 GT 1032N9 \$1019.73

See pages listed below for individual item descriptions

(1) 12-inch Band Saw-Sander Outfit. Includes Band Saw-Sander (9 GT 2435N) on page 8, Motor (9 GT 1255C) on pg. 30 and Leg Set (9 GT 22236C) on pg. 32.

(2) 6 1/2-inch Jointer-Planer Outfit. Includes Jointer-Planer (9 GT 2068N) with Leg Set (9 GT 22245C) on page 15 and Motor (9 GT 1216C) on page 30.



(3) 15 1/2-inch Drill Press Outfit. Includes Drill Press (9 GT 2137N) described on page 12 and Motor (9 GT 1255C) on page 30.

(4) 12-inch Wood Lathe Outfit. Includes Wood Lathe (9 GT 2380N) on page 9, Motor (9 GT 1255C) on page 30 and Workbench (9 GT 10279N) on page 6.

(5) Belt-Disc Sander Outfit. Includes Belt-Disc Sander (9 GT 2258N), Motor (9 GT 1226C) and Stand (9 GT 22213C) all described on page 11.

NOTE: See Bench Tool Warranty on page 21 and Motor Warranty on pg. 30. Order safety goggles sold on pg. 57.

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

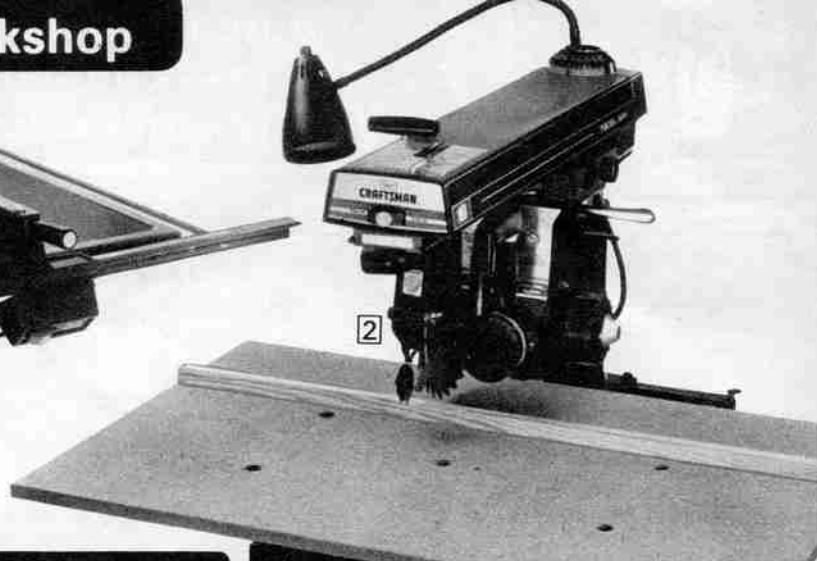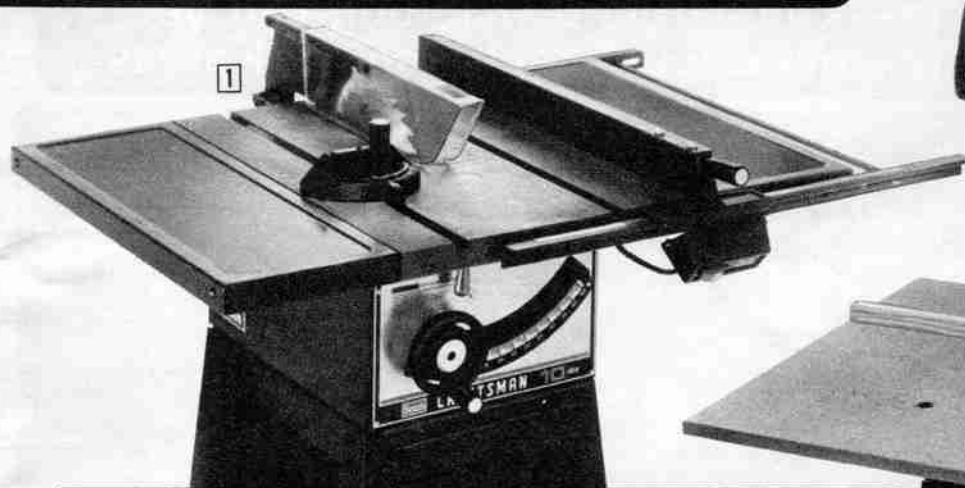

Workshops on this page include your choice of Table Saw or Radial Saw

2-tool Shop with Jointer-Planer

With Table Saw Sep. prices tot. \$817.84	With Radial Saw Sep. prices tot. \$758.85
---	--

Your choice **\$599⁰⁰** each

SHOP INCL: Jointer-Planer (3) and your choice of Table Saw (1) or Radial Saw (2).
ORDER INFO: See references below, Note on opposite page.

With Table Saw.

Shipping weight 403 lbs.
9 GT 1043N8\$599.00

With Radial Saw.

Shipping weight 380 lbs.
9 GT 1037N7\$599.00

4-tool Shop with Jointer-Planer, Vac and Band Saw-Sander

With Table Saw Sep. prices tot. \$1263.77	With Radial Saw Sep. prices tot. \$1204.78
--	---

Your choice **\$999⁰⁰** each

SHOP INCLUDES: Jointer-Planer (3), Vac (4), Band Saw-Sander (5) and Table Saw (1) or Radial Saw (2).
ORDER INFO: See references below, Note on opposite page.

With Table Saw. Wt. 564 lbs.
9 GT 1044N9\$999.00

With Radial Saw.

Shipping weight 541 lbs.
9 GT 1036N9\$999.00

5-tool Shop with Jointer-Planer, Vac, Band Saw-Sander, Drill Press

With Table Saw Sep. prices tot. \$1611.71	With Radial Saw Sep. prices tot. \$1552.72
--	---

Your choice **\$1299⁰⁰** each

SHOP INCLUDES: Jointer-Planer (3), Vac (4), Band Saw-Sander (5), Drill Press (6) and Table Saw (1) or Radial Saw (2).
ORDER INFO: See references below, Note on opposite page.

With Table Saw. Wt. 766 lbs.
9 GT 1034N9 ...\$1299.00

With Radial Saw. Wt. 743 lbs.
9 GT 1033N9 ...\$1299.00

See pages listed below for individual item descriptions

(1) 10-inch Table Saw Outfit. Includes Table Saw (9 GT 29814N), 2 Extensions (9 GT 29957C) with Stand (9 GT 22214C) on page 17 and Motor (9 GT 1217C) on page 30.


(3) 6½-inch Jointer-Planer Outfit. Includes Jointer-Planer (9 GT 2068N) with Leg Set (9 GT 22245C) on page 15 and Motor (9 GT 1216C) on page 30.

(4) 16-gallon size Home-N-Shop Vac (9 GT 1787L) described on page 23. Helps you pick up both wet or dry debris quickly and easily.

(2) 10-inch Radial Saw Outfit. Includes Radial Saw (9 GT 1976N) on page 21, Stand (9 GT 22205C) with Caster Set (9 GT 22208) on page 20 and Worklight (9 GT 2480) on page 32.

(5) 12-inch Band Saw-Sander Outfit. Includes Band Saw-Sander (9 GT 2435N) p. 8, Motor (9 GT 1255C) page 30, Leg Set (9 GT 22236C) page 32.

(6) 15½-inch Drill Press Outfit. Includes Drill Press (9 GT 2137N) described on page 12 and Motor (9 GT 1255C) described on page 30.

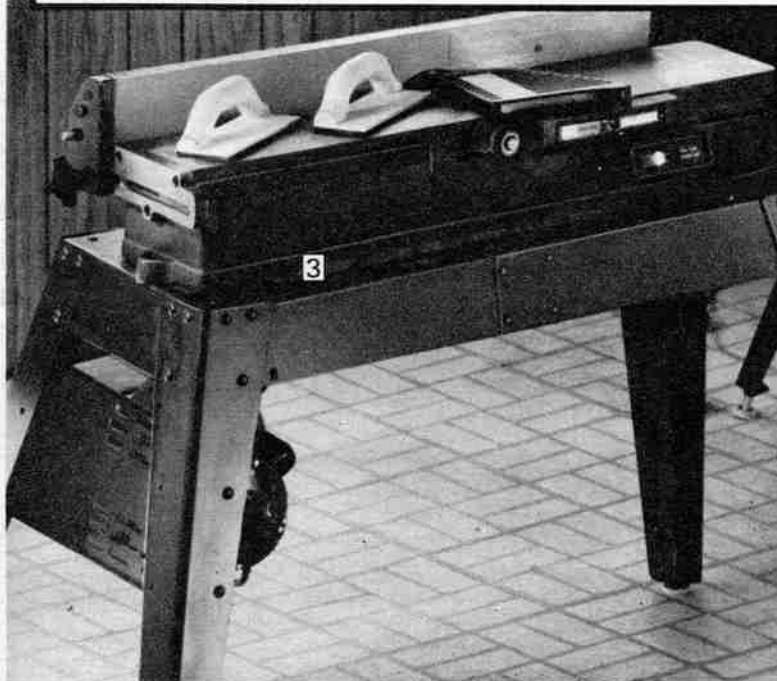



Bench Power
Tool Shop

Compact Bench Tools perform many of
the tasks our larger bench tools can, yet
they're small enough for home work areas

8-inch Table Saw
rips, miters...
cuts wood up to
2 1/4 inches thick

\$6799
without
extensions



Motor 9 GT 1253C
for tools
(1, 3, 4, 5, 6)
sold on page 30.

Radial Drill Press for
drilling wood, aluminum
and light steel

\$8999
without motor



Belt-Disc Sander
for shaping and sanding wood

\$6799



4 1/2-inch Jointer-Planer
planes and tapers wood

\$6799

(1) 8-inch Table Saw

BLADE, CAP.: Kromedge® 8-in. combination blade fits 3/8-in. arbor, cuts wood to 2 1/4 in. thick at 90°, 1 1/16 in. thick at 45°. Bevel scale shows degree of blade tilt. Table surface in front of blade at 1-in. cutting depth is 5 in. Rip fence positions to right or left of blade for rips up to 5 in. wide, 9 in. with extensions (2) below.

TABLE: Cast-iron, 10 1/2 x 13 in. wide.
ORDER INFO: Blade guard, rip fence, miter gauge, V-belt, machine, motor pulleys incl. Order motor (9 GT 1253C) on page 30, extensions (2), stand (9) and motor switch below.

(2) 5-in. Extensions. Fit 8-in. table saw (1) above. Pkg. of 2. Aluminum.
9GT24238—Wt. 4 lbs. 4 oz. Pkg. \$10.99

(3) 4 1/2-inch Jointer-Planer

Planes and tapers wood to meet your specifications.

CONSTRUCTION, CAPACITY: Cutter head spins on permanently-lubricated ball bearings. 3 steel blades plane up to 4 in. wide. Cast-iron 1-pc. base 21 3/8 x 4 1/4 in. Outfeed and infeed tables 4 x 10 in., adjust to 1/8 in. maximum depth of cut. Aluminum fence with calibrations for beveling to 45°. Overall 8 1/2 x 24 x 7 in. high.

ORDERING INFORMATION: V-belt; machine, motor pulleys; guard included. Order motor (9 GT 1253C) on page 30, motor mount (8), stand (9) and motor switch below.

9 GT 2187C—Wt. 19 lbs. \$67.99

(4) Belt-Disc Sander

For sanding and shaping wood.

CONSTRUCTION: Cast-aluminum 4x9-in. disc table tilts, locks at any angle horizontal to 45° for bevel sanding. Uses 1/4-in. shaft accessories. Cast iron 4x12-in. belt table. Belt tilts, locks horizontally or vertically. Adjustable belt tension, tracking. Drive shaft, pulleys turn on pre-lubricated sleeve bearings. Overall: 4x22x7 in. high.

ORDERING INFORMATION:

V-belt; machine, motor pulleys; 6-inch disc; 4x36-inch belt included. Order extra discs and belts on page 66, motor (9 GT 1253C) on page 30, motor mount (8), stand (9) and motor switch below.

9GT2264C—Shpg. wt. 17 lbs. \$67.99

(5) Radial Drill Press

HEAD CONSTRUCTION: Cast-iron 1-pc. head swivels up to 45°. Pre-lubricated sleeve bearings. Belt guard.

COLUMN, BASE: 1 1/2-in. diam. 14-gauge steel column, 6x9-in. cast-iron base with mounting holes.


CAPACITIES: Drills to center of 32-in. wide stock. Depth scale graduated in 16ths-in. Chuck takes bits with 3/64 to 1/2-in. shank. Spindle 16 in. from column. Geared chuck travels 2 in. 8 1/4 x 22 x 23 in. high.

ORDERING INFORMATION: Chuck; key V-belt; 3-step mach. motor pulleys included. Order bits on page 58, motor (9 GT 1253C) on page 30 and stand (9) below.

9 GT 2397C—Wt. 30 lbs. \$89.99

12-inch Lathe turns lamp bases, table legs,
bowls... also sands and polishes

\$6799

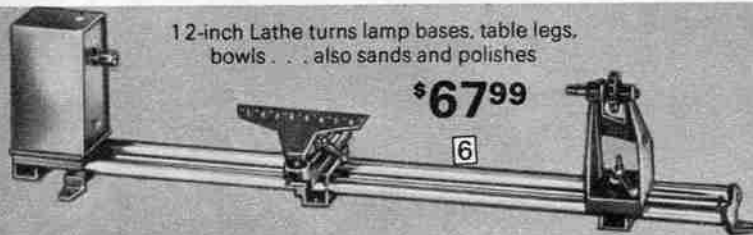

(7) Speed Reducer
for lathe (6)




Workbench for (6)
sold on page 6



(8) Motor Mount
for (3, 4)

CRAFTSMAN
Stand for
tools
(1, 3, 4
and 5)



(9)

(6) 12-inch Lathe. CAPACITY: 3-step machine motor pulleys for speeds of 850, 1725, 3450 rpm. Maximum 12-inch swing. 6 inches from center of spindle to bed. 36 inches between centers.

CONSTRUCTION: Cast-iron headstock with 3/4-16-inch threaded spindle, tailstock. Steel tubing bed. Permanently-lubricated ball bearings. Ball thrust cup center, 49 1/2 x 7 x 10 3/4 inches high.

ORDERING INFO: 3-step machine, motor pulleys; V-belt; tool rest; spur; cup centers, instructions included. Order motor (9 GT 1253C) on 30 and workbench on page 6.

9 GT 2387L—Shipping weight 28 pounds \$67.99

(7) Speed Reducer for Lathe (6). Reduces speed to 300 rpm. Fits NEMA 48 or 56-frame motors. Cast aluminum, steel.

ORDERING INFORMATION:

Shipping weight 8 pounds 2 ounces.

9 GT 23895 \$32.99

Motor Switch (not shown). Pull-on/Push-off switch with built-in locking key. For use with motors rated at no more than 15 amps or 3/4 HP at 125 volts. UL listed. 6-foot cord.

ORDERING INFORMATION:

Shipping weight 2 pounds.

9 GT 13633 \$12.99


(8) Motor Mount
For (3, 4). Swivels;
holds belt tension.

Shpg. wt. 1 lb. 12 oz.
9GT2730—Steel \$3.99

(9) Steel Stand for (1, 3, 4, 5). Top 24 1/2 x 16 1/16 in. Adjusts from 26 to 34 in. high.

ORD. INFO: Unassembled. Shpg. wt. 23 lbs.
9 GT 22219C \$27.99

Accessories for table saws and radial saws

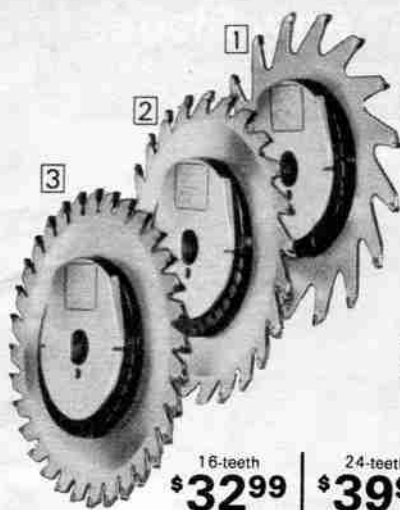

(1 thru 3) CRAFTSMAN® Adjustable Dadoes* with Carbide Tips for extra smooth cuts

Adjustable hubs . . . dial width from 1/4 to 1 3/16-in. without removing dado

16-teeth \$32.99 | 24-teeth \$39.99 | 32-teeth \$46.99

USES: Plough, dado, lap, joint, groove, rabbet and more. Crosscut all hard and soft woods. For use on Formica® laminated plastic, other laminates and sensitive materials. Use on 9, 10, 12, 14-in. radial or table saws only**.

CONSTRUCTION: 7-in. tempered tool-steel blade. Carbide-tipped teeth. 3/4-inch hole; 5/8-inch bushing.

CUTTING CAPACITY: Widths from 1/4 to 1 3/16-in.

(1) 16-tooth Adjustable Dado. Maximum depth 1 1/2-in. 9 GT 3263—Shipping weight 2 pounds 10 ounces . . . \$32.99

(2) 24-tooth Adjustable Dado. Maximum depth 1 1/2-in. 9 GT 3261—Shipping weight 2 pounds 13 ounces . . . \$39.99

(3) 32-tooth Adjustable Dado. Maximum depth 1 1/2-in. 9 GT 3262—Shipping weight 2 pounds 13 ounces . . . \$46.99

(4 and 5) CRAFTSMAN® Dado Sets* with Kromedge® Blades . . . precision-ground for accuracy

The Kromedge® blades on these sets are rust-resistant for long life; precision-ground; heat-treated and tempered . . . stay sharp longer than ordinary steel blades. Blade and chippers matched together . . . gives smooth cuts.

(4) Our best professional-quality satin-cut Dado Sets

USES: Cut veneers, other sensitive materials with little or no splintering. Gives straight, even sides. Also for plywood.

CONSTR: Kromedge® steel. Cutters taper-ground for clearance, accurate alignment.

SET COMPOSITION: Two 1/8-in. outside cutters, four 1/8-in. chippers, one 1/16-in. chipper. Add or remove chippers for maximum variation.

CUTTING CAPACITY: Dadoes to 1 1/4 in. deep. Max. width of cut is 1 3/16 in. Fits 3/8-in. arbor.

SIZES. ORDERING INFO:

7-inch Set. Wt. 4 lbs. 12 oz. 9 GT 3257 . . . Set \$34.99

8-inch Set. Wt. 5 lbs. 8 oz. 9 GT 3253 . . . Set \$39.99

* When using Dadoes and Molding Heads with table saws use inserts sold on page 19; for radial saws use guard sold on page 22.

** Not for use on any radial saw with universal motor.



(5) 8-in. flat ground Dado Set

Handles extra-tough jobs on table, radial or swing saws.

USES: For rough cuts on lower quality lumber.

CONSTRUCTION: Steel with Kromedge® finish . . . gives longer life; resists rust, wear and corrosion.

SET COMPOSITION: Two outside cutters 1/8-in. thick. Add or remove the one 1/16-in. and four 1/8-in. chippers for maximum variations.

CUTTING CAPACITY: Depth varies by machine. Maximum width of cut is 1 3/16 inch. Fits 3/8-inch round arbor.

ORDERING INFORMATION: Instruction booklet included.

Shipping weight 5 lbs. 8 oz. 9 GT 32475 . . . Set \$29.99

CRAFTSMAN® Molding Heads* and Kromedge® Cutter-bit Sets

Do many woodworking cuts and operations normally requiring a shaper

15-pc. Set \$27.99 | 21-pc. Set \$25.99 | 27-pc. Set \$39.99
7-in. diam. | 4 3/4-in. diam. | 7-in. diam.

7-inch diameter, 15-piece Set

SET COMP: 12 bits (four 3-pc. sets: A, D, E, F, below), triple-cutter head, spacer-washer, bushings, instr., case.

CONSTRUCTION: Kromedge® steel. 7-in. diameter.

ORDERING INFO: For 9, 10, 12-in. direct-drive radial or belt driven table saws. Fits 5/8 or 3/4-in. round arbors.

9 GT 3218—Shipping weight 3 lbs. 5 oz. . . . Set \$27.99

4 3/4-inch diameter, 21-piece Set

SET COMP: 18 bits (six 3-pc. sets: A thru F below), triple-cutter head, spacer-washer, bushings, instructions, case.

CONSTRUCTION: Kromedge® steel. 4 3/4-in. diameter.

ORDERING INFORMATION: For 8, 9, 10-in. belt driven table saws. Fits 1/2, 5/8, 3/4-in. round arbors. Not for 7 1/2-in. table saw or former radial saw 9-2922.

9 GT 3221—Shipping weight 2 lbs. 2 oz. . . . Set \$25.99

7-inch diameter, 27-piece Set

SET COMP: 24 bits (eight 3-pc. sets: A thru H below), triple cutter-head, spacer-washer, bushings, instruction case.

CONSTRUCTION: Kromedge® steel. 7-inch diameter.

ORDERING INFORMATION: For 9, 10, 12-in. radial; or 12-in. table saws. Fits 5/8 or 3/4-in. round arbors.

9 GT 3217—Shipping weight 4 lbs. 3 oz. . . . Set \$39.99

7-in. diameter Triple-cutter Head alone

CONSTRUCTION: Steel. 7-in. diameter. No bits included.

ORDER INFO: For use with Kromedge® bits sold below.

9 GT 3214—Shipping weight 2 lbs. 10 oz. . . . \$10.99

Kromedge® Cutter-bit Sets. Tool steel. 3 bits in each set.

(illus.)	Catalog Number	Type of Cut (All bits 1 inch wide)	Wt. oz.	Set
(A)	9GT2353	Cabinet Door Lip	4	\$3.99
(B)	9GT2355	Base Molding	4	3.99
(C)	9GT2301	Glue Joint	5	3.99
(D)	9GT2352	3 bead (1/4 inch each)	5	3.99
(E)	9GT3212	3/16-inch Cove and Bead	5	3.99
(F)	9GT2302	1-inch Planer and Jointer	5	3.99
(G)	9GT3211	Window Sash	5	3.99
(H)	9GT3204	Vee Groove	4	3.99
(J)	9GT2351	1/4-inch and 1/2-inch Quarter Round	5	3.99
(K)	9GT3206	1-inch Flute (1/2-inch radius)	5	3.99
(L)	9GT3207	3/16-inch Quarter Round, 3/16-inch Cove (Drop Leaf)	5	3.99
(M)	9GT3208	3/16-in. 3/8-in. Quarter Round; 1/4-in. Bead	4	3.99
(N)	9GT3254	Clover Leaf and Screen Mold	4	3.99
(P)	9GT3202	"Ogee" Window and Door Stop	4	3.99
(R)	9GT3203	1/2-inch Flute and 1/2-inch Cove	4	3.99
(S)	9GT3209	3/8-inch Cove	4	3.99
(T)	9GT3210	Panel Cupboard Door	5	3.99
(V)	9GT3213	Cupboard Door Rail End	5	3.99
(W)	9GT3203	Tongue-Groove. Has 6 bits	7	7.99

CRAFTSMAN® 22-pc. Single-cutter Molding Head* Set \$34.99


Includes 18 bits that cut all patterns above except (G), (V).

SET COMPOSITION: Includes 18 single Kromedge® bits, cutter head, wrench, spacer-washer, bushing, instruction book, plastic case. Set includes molding head.



CONSTRUCTION: Kromedge® Steel. 5 3/8-in. cutting diameter.

ORDERING INFORMATION: For table or radial saws up to 10-in. Not for use on former 8-in., radial 9-2922.

9 GT 3215—Shpg. wt. 3 lbs. . Set \$34.99

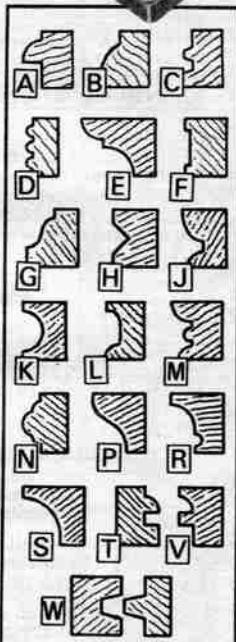

YOU CAN DO IT

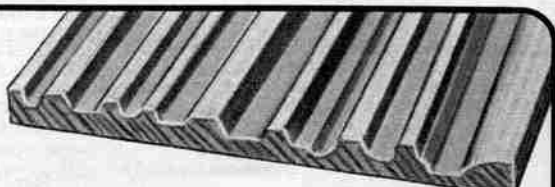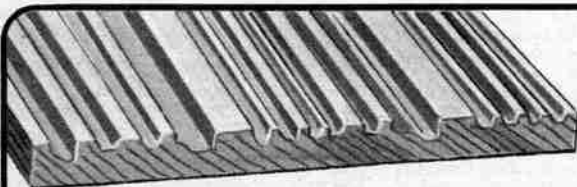

. . . with CRAFTSMAN Dadoes. You can make all the cuts above: dadoes, end grooves, edge grooves, slots, troughs, notches, rabbets, chamfers and V-grooves. You'll be surprised at what you can do with CRAFTSMAN Dadoes. All it takes is a little know-how and you can do it!

. . . with CRAFTSMAN Molding Heads and Cutter bits. You can make all the decorative cuts above, plus do many shaping, jointing and planing operations. You'll be surprised at what you can do with CRAFTSMAN Molding Heads and Cutter bits. All it takes is a little know-how and you can do it!



CRAFTSMAN® Kromedge® Saw Blades

Made of chrome-nickel-molybdenum steel; they hold a keen cutting edge. Chromium-fortified to help these blades last longer than ordinary steel blades.



(1) Hollow-ground Planer Blade

USES: Crosscuts, rips, miters in hard, soft wood, plywood, furniture stock.

CONSTRUCTION: Deep hollow-ground design helps blade run true, reduce warping. For all Sears saws, other saws with center hole sizes listed.

SIZES, ORDER INFO: See Safety Note on page 29.

Catalog Number	Diam. in.	Sections	Teeth	Center Hole in.	Max. RPM	Wt. lbs. oz.	Each	Two for
9GT32427	12	19	76	1-5/8"	3500	2 12	\$15.99	\$28.78
9GT32426	10	16	64	1-5/8"	3500	1 11	12.99	23.38
9GT32425	9	14	56	5/8-1 1/2"	5500	1 7	9.99	17.98
9GT32424	8	12	48	5/8-1 1/2"	5500	1 7	7.99	14.38
9GT32423	7 1/2	12	48	5/8-1 1/2"	5700	1 13	6.99	12.58
9GT32422	7	11	44	5/8-1 1/2"	6000	1 12	6.79	12.22
9GT32429	6 1/2	10	40	5/8-1 1/2"	6400	1 11	6.49	11.68

(2) Master Combination Blade

USES: Crosscuts, miters hard, soft wood; rips all dry wood, furniture stock.

CONSTR: Teeth set for fast, smooth cuts. Deep expansion slots help blade run true, reduce warping. For all Sears, other saws with center holes listed.

SIZES, ORDER INFO: See Safety Note on page 29.

Catalog Number	Diam. in.	Sections	Teeth	Center Hole in.	Max. RPM	Wt. lbs. oz.	Each	Two for
9GT32499	12	18	72	1-5/8"	3500	3 2	\$8.99	\$16.18
9GT32498	10	16	64	1-5/8"	5500	1 12	5.99	10.78
9GT32497	9	16	64	5/8-1 1/2"	5500	1 5	4.99	8.98
9GT32496	8	12	48	5/8-1 1/2"	5500	1 1	4.49	8.08
9GT32495	7 1/2	15	60	5/8-1 1/2"	5600	1 15	3.99	7.18
9GT32494	7 1/4	15	60	5/8-1 1/2"	5700	1 14	3.79	6.82
9GT32493	7	12	48	5/8-1 1/2"	6000	1 11	3.49	6.28
9GT32492	6 1/2	12	48	5/8-1 1/2"	6400	1 10	3.49	6.28

(3) Chisel-tooth Combination Blade

USES: All purpose crosscuts, rips and miters in hard and soft wood.

CONSTRUCTION: Flat top ground for smooth and precise cuts. For all Sears saws and other saws with center hole sizes listed.

SIZES, ORDERING INFORMATION:

See Safety Note on page 29.

Catalog Number	Diam. in.	Teeth	Center Hole in.	Max. RPM	Wt. lbs. oz.	Price Each	Two for
9GT32702	12	24	1-5/8"	3500	2 15	\$8.99	\$16.18
9GT32668	10	28	5/8-1 1/2"	5500	1 13	5.49	9.88
9GT32667	9	28	5/8-1 1/2"	5500	1 8	4.99	8.98
9GT32666	8	28	5/8-1 1/2"	5500	1 2	4.49	8.08
9GT32665	7 1/2	26	5/8-1 1/2"	5600	1 15	3.99	7.18
9GT32664	7 1/4	26	5/8-1 1/2"	5700	1 14	3.79	6.82
9GT32669	7	26	5/8-1 1/2"	6000	1 15	3.49	6.28
9GT32663	6 1/2	24	5/8-1 1/2"	6400	1 11	3.49	6.28

This blade best suited for heavy-duty ripping.

(4) Rip Blade

USES: Rips in all woods, excellent for re-sawing.

CONSTRUCTION: Extra-deep gullets help sweep sawdust out. With expansion slots. For all Sears saws and other saws with center hole sizes listed.

SIZES, ORDERING INFORMATION:

See Safety Note on opposite page.

Catalog Number	Diam. in.	Teeth	Center Hole in.	Max. RPM	Wt. lbs. oz.	Price Each	Two for
9GT32567	10	36	5/8-1 1/2"	5500	1 12	\$5.99	\$10.78
9GT32566	9	36	5/8-1 1/2"	5500	1 6	4.99	8.98
9GT32564	7 1/4	30	5/8-1 1/2"	5700	1 14	3.79	6.82
9GT32563	7	30	5/8-1 1/2"	6000	1 11	3.49	6.28
9GT32562	6 1/2	30	5/8-1 1/2"	6400	1 10	3.49	6.28

(5) Plywood and Veneer Blade

USES: Cut laminates, plastics, veneers, plywood, other sensitive materials. Maximum cut is 1 1/4 in.

CONSTRUCTION: Taper-ground rim. For all Sears saws and other saws with center hole sizes listed.

SIZES AND ORDERING INFORMATION:

See Safety Note on opposite page.

Catalog Number	Diam. in.	Teeth	Center Hole in.	Max. RPM	Wt. lbs. oz.	Price Each	Two for
9GT32539	10	200	5/8-1 1/2"	5500	1 13	\$12.99	\$23.38
9GT32538	9	200	5/8-1 1/2"	5500	1 10	9.99	17.98
9GT32537	8	176	5/8-1 1/2"	5500	1 3	7.99	14.38
9GT32534	7 1/2	200	5/8-1 1/2"	6000	1 15	6.99	12.58
9GT32532	6 1/2	150	5/8-1 1/2"	6400	1 12	6.49	11.68

(6) Crosscut Plywood Blade

USES: All purpose crosscuts in Celotex® fiberboard, woods, veneers.

CONSTRUCTION: Flat top ground. Large number of teeth allow each to take small, equal bites... results in fine smooth cuts. For all Sears saws and other saws with center hole sizes listed.

Catalog Number	Diam. in.	Teeth	Center Hole in.	Max. RPM	Wt. lbs. oz.	Price Each	Two for
9GT32451	12	200	1-5/8"	3500	3 1	\$8.99	\$16.18
9GT32446	10	200	5/8-1 1/2"	5500	1 12	5.99	10.78
9GT32448	9	200	5/8-1 1/2"	5500	1 8	4.99	8.98
9GT32447	8	176	5/8-1 1/2"	5500	1 2	4.49	8.08
9GT32449	7 1/2	200	5/8-1 1/2"	5600	1 14	3.99	7.18
9GT32444	7 1/4	200	5/8-1 1/2"	5700	1 14	3.79	6.82
9GT32445	7	200	5/8-1 1/2"	6000	1 13	3.49	6.28
9GT32442	6 1/2	150	5/8-1 1/2"	6400	1 10	3.49	6.28

*Center hole knockout bushed for arbor sizes listed.

Sears Coarse-tooth Disposable Framing Blades

CONSTRUCTION: Tempered 17-gauge steel bodies, 5/8-inch center hole.

SIZES, ORDERING INFORMATION: Not Craftsman.

6 1/2-inch diameter. 24 teeth. Wt. each 11 ounces.
9 GT 32612 Ea. \$1.49; 5 for \$6.99; 40 for \$54.99

7-inch diameter. 26 teeth. Wt. each 15 oz.
9 GT 32512 Ea. \$1.49; 5 for \$6.99; 40 for \$54.99

7 1/4-inch diameter. 24 teeth. Wt. each 14 ounces.
9 GT 32712 Ea. \$1.49; 5 for \$6.99; 40 for \$54.99

Blade Pack

Save 15% over regular each price when you buy 3-piece Blade Pack

Blade Pack offers you three of our most popular blades. See descriptions and center hole sizes above.

INCLUDES: One each: Master Combination (2), Chisel-tooth Combination (3), Crosscut Plywood (6).

Catalog Number	Diam. in.	Wt. lbs. oz.	3-Blade Pack
9GT32351	12	9 1	\$26.97
9GT32352	10	5 5	17.47
9GT32353	9	4 5	14.97
9GT32354	8	3 4	13.47
9GT32355	7 1/2	1 12	11.97
9GT32356	7 1/4	2 10	11.37
9GT32357	7	2 7	10.47
9GT32358	6 1/2	1 15	10.47

CRAFTSMAN Sanding Wheels and Discs

(7) 10-inch Sanding Wheel. Tempered steel casting. Fits 3/4 or 5/8-inch arbors.

9 GT 22723—Wt. 3 lbs. 14 oz. \$6.99

(8) 8-inch Sanding Wheel. Aluminum casting. Fits 5/8, 1/2-inch arbors.

9 GT 2274—Wt. 1 lb. 2 oz. \$4.99

Replacement Sanding Discs for above (not shown). 3-inch center hole. Package of 6: 2 each of fine, medium, coarse. Use disc cement. ORDERING INFORMATION:

10-inch Disc.
9 GT 22731—Shipping weight 13 ounces.
Package \$2.49 5 Packages for \$10.99

8-inch Disc
9 GT 22732—Shipping weight 8 ounces.
Package \$1.79 5 Packages for \$6.99

(9) Blade Sharpener. Attaches directly to radial or table saw. Handles reshaping, re-tooth, and jointing. For table or radial saws with 1/2, 5/8, 3/4, or 1-inch round arbors. Mounts, removes easily. Sharpens regular blades up to 12-inch diameter. Grinding wheel 60-grit, measures 6 1/4 x 5 1/2 inch.

ORDERING INFORMATION: Not for carbide-tipped or disposable blades.
Shipping weight 5 lbs.
9 GT 3532 \$29.99

Replacement Grinding wheel for sharpener above.

Shipping weight 14 oz.
9 GT 35321 \$6.99

(10) Blade Reconditioning Tool. Use to alternately set teeth on 4 to 16-inch circular saw blades. To operate: place blade on stud, adjust beveled anvil for desired set, strike set punch. Set angle on blade before sharpening. Use with blade sharpener, or bench grinding attachment sold at left. Turned steel, cast iron.

ORDERING INFORMATION: Not for carbide-tipped or disposable blades.
9 GT 23391—Wt. 6 lbs. 8 oz. \$59.99

(11) CRAFTSMAN® Blade Stabilizers


Use with carbide-tipped and most regular blades from 17 to 10-in. diam. Stabilizer is 4 in. diam. Center hole knockout bushed for 5/8 to 1/2-in. arbors. Tempered steel. ORDERING INFO: Package of 2.
9 GT 4952—Wt. 1 lb. 6 oz. Pkg. \$4.99

Last up to 5 times longer than any other blade we offer

Here are some features that make these Blades our finest:

- Kromedge blade bodies of tough, tempered steel fortified with chromium
- Chrome-coatings resist rust; help reduce gum and pitch build-up that makes blades bind
- Blade teeth are precision-milled for uniformity. Tungsten carbide tips are cobalt bonded for strength
- Each tip is individually brazed onto the blade, then diamond-ground to form a solid, keen cutting edge
- Fine balancing provides true run out
- Blades fit all Sears, Black and Decker, Skill and other brand saws with round arbors... check center hole sizes listed in charts

(1) Flat, top-ground tips for more controlled cut than non-tipped blades

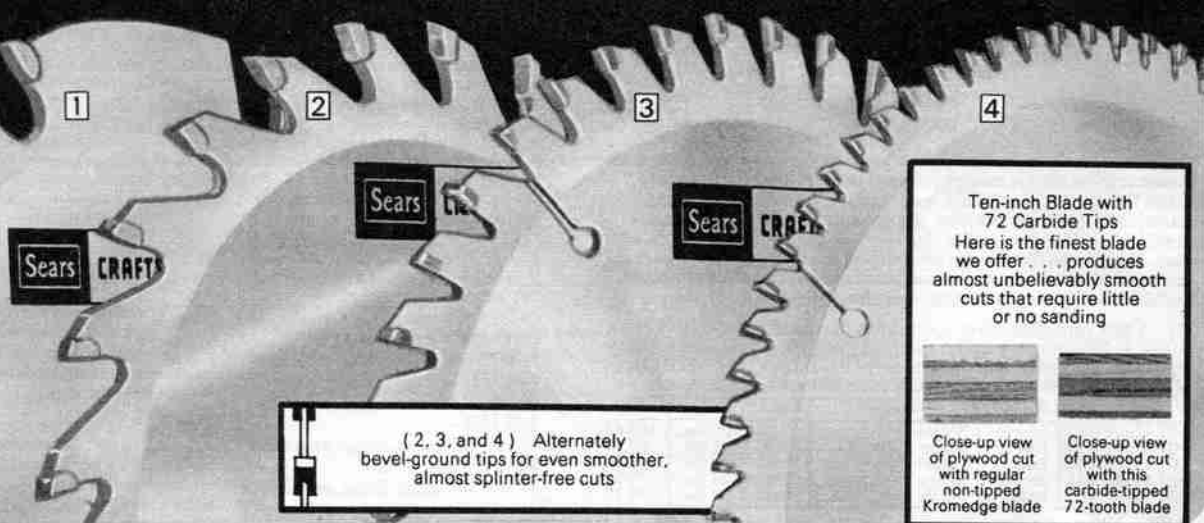

(2, 3, and 4) Alternately bevel-ground tips for even smoother, almost splinter-free cuts

Ten-inch Blade with 72 Carbide Tips
Here is the finest blade we offer... produces almost unbelievably smooth cuts that require little or no sanding



Close-up view of plywood cut with regular non-tipped Kromedge blade



Close-up view of plywood cut with this carbide-tipped 72-tooth blade

(1) General Purpose Blades. For more controlled cuts than with non-tipped blades... tips protect .020/.050 in. above non-cutting edge taking small equal bites. USES: Crosscuts, rips, miters, bevels (regular and finish cuts). Regular cuts in Masonite® brand hardboard, Formica® brand plastic laminate, asbestos, wallboard, soft metals. *Not for use on ferrous metals or masonry.*

SIZES, ORDERING INFO: See Safety Note below.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole, in.	Shpg. wt. lbs. oz.	Price
9 GT 32465	6½	8	6400	⅝-1½*	1 5	\$9.99
9 GT 32461	7	8	6000	⅝-1½*	1 7	10.49
9 GT 32481	7½	14	6000	⅝	1	14.99
9 GT 32483	7¼	8	5700	⅝-1½*	1 4	10.99
9 GT 32484	8	12	5200	⅝-1½*	1 10	12.99
9 GT 32485	9	12	4600	⅝-1½*	2 4	14.99
9 GT 32486	10	12	4200	1-⅝*	2 11	17.99
9 GT 32469	12	12	3500	1-⅝*	3 4	22.99

(2) Combination Blades. Produces smooth, almost splinter-free cuts, taking smaller bites than blade (1) above. Ideal for fast crosscutting and ripping.

USES: Crosscuts, miters and bevels. Cuts all woods, plywoods, chipboard, Masonite® brand hardboard asbestos wallboard and soft metals. *Not for use on ferrous metals or masonry.*

SIZES, ORDERING INFO: See Safety Note, below.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole, in.	Shpg. wt. lbs. oz.	Price
9 GT 32487	6½	24	6700	⅝-1½*	1 15	\$12.99
9 GT 32488	7	24	6000	⅝	1 1	13.99
9 GT 32489	7¼	24	5700	⅝	1 3	14.99
9 GT 32471	9	24	4600	⅝-1½*	2 4	21.99
9 GT 32476	10	24	4200	⅝	2 10	23.99
9 GT 32477	12	24	3500	1-⅝*	3 11	29.99

(5) Rip Blade with 30 tungsten carbide tips. Blade teeth are set at sharper angle than on other blades. This allows high-hooked blade to chisel through wood quickly, leaving a smooth cut. Carbide tips are flat, top-ground. Rigid standard construction lets you cut through thick stock easily with a fine finish.

USES: For fast, smooth rips in all woods; resawing.†

SIZES, ORDERING INFORMATION: See Safety Note, above.

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Max. RPM	Shpg. wt. lbs. oz.	Price
9 GT 32011	9	30	⅝	4600	2 2	\$24.99
9 GT 32012	10	30	⅝	4200	2 7	26.99
9 GT 32014	12	30	1-⅝*	3500	3 10	34.99

*Round, center-hole knockout bushed for arbor sizes listed.

(6) 10-inch Aluminum-cutting Blade with 60 tungsten carbide tips. Flat, top-ground tips. Thin-rim construction. USES: For aluminum up to ¼-inch thick.† Fits ⅝ or ¾-in. arbors. Maximum cutting depth 1½ in. Maximum RPM 4200.

ORDERING INFO: For use on 10-inch or larger saws.

9 GT 32019—Shipping weight 2 lbs. 10 oz. \$39.99

†Not for use on ferrous metals or masonry.

(3) Cut-off Blades

Blades have more teeth than blade (2) above, for even smoother, almost splinter-free cuts. Expansion slots guard against warping, heat-distortion.

USES: Crosscuts, rips, miters and bevels. Cuts all woods, laminates, plastics, Formica® brand plastic laminate, Masonite® brand hardboard, Transite® asbestos cement products and other materials. *Not for use on ferrous metals or masonry.*

SIZES, ORDERING INFO: See Safety Note, below.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole, in.	Wt. lbs. oz.	Price
9 GT 32559	8	40	5200	⅝-1½*	1 12	\$24.99
9 GT 32551	9	40	4600	⅝-1½*	2 6	27.99
9 GT 3255	10	40	4200	1-⅝*	2 10	29.99
9 GT 32555	12	48	3500	1-⅝*	3 10	39.99

*Center hole knockout bushed for arbor sizes listed.

**Excellent for cutting through nails in floorboards.

10-in. Blade with 48 triple-ground tips. Similar to (3) above except tips are triple-ground for even smoother, more satin-like cuts.

USES: Crosscuts, miters and bevels. Cuts all woods, metals such as aluminum, brass, copper and zinc. *Not for use on ferrous metals or masonry.*

ORDER INFO: For use on 10-inch or larger saws.

9 GT 3250—Shpg. wt. 2 lbs. 12 oz. \$34.99

SAFETY NOTE:

Play it safe! Protect your eyes... wear safety goggles sold on page 57 when using portable, radial or table saws.

Specialty Blades



Sears flat top-ground Carbide-tipped Steel Blades

USES: Recommended for rough work where blade can easily be damaged and finest blades are not needed. Good for general purpose wood-working... crosscuts, rips, miters, bevels, (regular and finish cuts). Also for regular cuts in hardboard, plastic laminate, asbestos wallboard. *Not for use on power-fed industrial machines, ferrous metals or masonry.*

CONST: Steel bodies, tungsten carbide tips.

SIZES, ORDER INFO: See Safety Note, above.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole, in.	Wt. lbs. oz.	Price
9 GT 32462	6½	8	6400	⅝-1½*	1 ...	\$5.99
9 GT 32463	7	8	6000	⅝	1 1	5.99
9 GT 32464	7¼	8	5700	⅝	1 3	5.99
9 GT 32478	8	8	5200	⅝-1½*	1 6	6.99
9 GT 32479	10	8	4200	⅝	2 14	7.99

*Center-hole knockout bushed for arbor sizes listed

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

CRAFTSMAN® Medium-duty Motors

For workshop tools, pumps, fans and furnace blowers

Bench Power Tool Shop



(1 and 2)
Capacitor-start Motors for hard-starting tools

Capacitors in these motors reduce starting current required and increase starting torque needed for hard-to-start loads.

CONSTRUCTION: Rigid base with 3x4 $\frac{7}{8}$ -inch mounting (NEMA 56 frame). Mount in any position, drip-proof in horizontal position.

ELEC. INFO: Runs on 60-Hz. AC (see voltage below). 4-foot, 3-wire cord. No switch. Electrically reversible. Customer should provide inline protection for motors without manual reset overload protectors.

ORDERING INFORMATION: See warranty below.

(1) 1725 rpm. For lower speed tools like band saws, drill presses, lathes. Ball-bearing types also good for pumps, compressors. All have manual reset overload protectors except 9 GT 1255C and 9 GT 1256C. All are 115 or 230-volt except 9 GT 1255C which is 115-volt only.

Catalog No.	HP	Bearings	Shaft Diameter	Watts††	Shpg. wt.	Price
9 GT 1250C	$\frac{1}{2}$	Sleeve	Single $\frac{1}{2}$ -inch*	490	20 lbs.	\$59.99
9 GT 1255C	$\frac{1}{2}$	Sleeve	Single $\frac{1}{2}$ -inch*	660	21 lbs.	57.99
9 GT 1254C	$\frac{1}{2}$	Ball	Double $\frac{1}{2}$ - $\frac{3}{4}$ -in.†	660	21 lbs.	72.99
9 GT 1256C	$\frac{3}{4}$	Sleeve	Single $\frac{3}{4}$ -in.†	960	24 lbs.	77.99
9 GT 1215C	1	Ball	Single $\frac{3}{4}$ -in.†	1200	38 lbs.	99.99

(2) 3450 rpm. For higher speed tools like table saws, jointer planers, shapers, sanders. Double-end shaft; $\frac{5}{8}$ -in. diameter with $\frac{3}{16}$ -in. square keyway; and $\frac{1}{2}$ -in. diam. with $\frac{3}{16}$ -in. deep flat. All have manual reset overload protector except 9 GT 1216C, 9 GT 1217C.

Catalog No.	HP	Bearings	Voltage	Watts††	Shpg. wt.	Price
9 GT 1216C	$\frac{1}{2}$	Sleeve	115	720	17 lbs.	\$55.99
9 GT 1218C	$\frac{1}{2}$	Ball	115 or 230	720	17 lbs.	59.99
9 GT 1226C	$\frac{3}{4}$	Sleeve	115	1000	19 lbs.	59.99
9 GT 1219C	$\frac{3}{4}$	Ball	115 or 230	1000	19 lbs.	67.99
9 GT 1217C	1	Sleeve	115	1250	21 lbs.	67.99
9 GT 1220C	1	Ball	115 or 230	1250	23 lbs.	77.99
9 GT 1221C	1 $\frac{1}{2}$	Ball	115 or 230	1800	21 lbs.	102.99

*With $\frac{3}{16}$ -inch adapter sleeve and $\frac{3}{16}$ -inch flat on shaft ††Full-load input watts

(5) Split-phase Motors

$\frac{1}{2}$ -HP Motor \$44.99



For use with easy-starting tools like grinders, sanders, and small band saws.

CONST: 1725 rpm. Rigid base, 3x4 $\frac{7}{8}$ -in. mounting (NEMA 56 frame). Sleeve bearings. Mount any position, drip-proof when horizontal.

ELECTRICAL INFO: 115-v., 60-Hz. AC. 4-ft., 3-wire cord. Electrically reversible. No switch. No overload protector (except 9 GT 1233C). . . customer should provide own inline protection.


ORDERING INFORMATION: See warranty below. See reversing switches, page 32.

Catalog Number	HP	Shaft-end diameter	Watts	Shpg. wt.	Price
9 GT 1251C	$\frac{1}{4}$	Single $\frac{1}{2}$ -in.*	420††	16 lbs.	\$35.99
9 GT 1252C	$\frac{1}{4}$	Single $\frac{1}{2}$ -in.*	490††	16 lbs.	41.99
9 GT 1233C	$\frac{1}{4}$	Single $\frac{1}{2}$ -in.*	490††	16 lbs.	49.99
9 GT 1253C	$\frac{1}{2}$	Single $\frac{1}{2}$ -in.*	670††	18 lbs.	44.99

*With $\frac{3}{16}$ -inch adapter sleeve and $\frac{3}{16}$ -inch flat on shaft ††Full-load input watts



3450-rpm, $\frac{1}{2}$ -HP, ball-bearing motor \$59.99



(3 and 4) ENERGY-SAVING Motors for fan and furnace blowers

High-efficiency motors do same work, but use less electricity, than comparable size motors of same capacity



(3) Direct-drive Furnace Blower Motor. Replaces motors $\frac{1}{2}$ to $\frac{1}{4}$ HP.

CONSTRUCTION: Open-frame, capacitor-run motor. Sleeve bearings. 1075 rpm/4 SP. NEMA 48Y frame. Hub-ring mount, 2 $\frac{1}{2}$ -inch diameter. Single-end $\frac{1}{2}$ -inch shaft with $\frac{3}{16}$ -inch adapter sleeve and $\frac{3}{16}$ -inch flat on sleeve. Mount in any position, drip-proof in horizontal position.

ELECTRICAL INFO: 115-volt, 60-Hertz AC. Elec. reversible. Auto. reset overload protector. No switch or cord. See full-load input watts below.

ORDERING INFO: See warranty below. See reversing switches, page 32.

$\frac{1}{4}$ HP, 225 watts. Shpg. wt. 11 lbs.

9 GT 1271.....\$49.99

$\frac{1}{4}$ HP, 315 watts. Shpg. wt. 13 lbs.

9 GT 1272.....54.99

$\frac{1}{2}$ HP, 400 watts. Shpg. wt. 14 lbs.

9 GT 1273.....59.99

$\frac{1}{2}$ HP, 595 watts. Shpg. wt. 15 lbs.

9 GT 1274C.....64.99

(4) Belted Fan, Blower Motors. For hard-starting belt-driven blowers.

CONSTRUCTION: Split-phase start/permanent-split capacitor-run motors run on less electricity but have high starting torques of split-phase motors. Sleeve bearings. 1725 rpm. All are NEMA 48 frame, except $\frac{1}{2}$ -HP motor is NEMA 56 frame. Resilient mount. Single-end $\frac{3}{8}$ -inch shaft, $\frac{5}{16}$ -inch square keyway. Mount in any position, drip-proof when horizontal. Open frame.

ELECTRICAL INFO: 115-volt, 60-Hertz AC. Elec. reversible. Auto. reset overload protector. No switch or cord. See full-load input watts below.

ORDERING INFO: See warranty below. See reversing switches, page 32.

$\frac{1}{4}$ HP, 310 watts. Shpg. wt. 16 lbs.

9 GT 1275C.....\$54.99

$\frac{1}{2}$ HP, 365 watts. Shpg. wt. 19 lbs.

9 GT 1276C.....59.99

$\frac{1}{2}$ HP, 535 watts. Shpg. wt. 22 lbs.

9 GT 1277C.....79.99

Furnace Blower, Fan Replacement Motors

Split-phase $\frac{1}{2}$ -HP Motors. Replace motors $\frac{1}{2}$ to $\frac{1}{4}$ HP.

CONSTRUCTION: Sleeve bearings. Single-end $\frac{1}{2}$ -inch shaft.* Resilient mount. Thru-bolts for direct-drive fans. Mount in any position, drip-proof in horizontal position.

ELECTRICAL INFORMATION: 115-volt, 60-Hertz AC. Automatic reset overload protector. Electrically reversible.

ORDERING INFORMATION: See warranty below.

Catalog No.	RPM	Mounting (in.)	NEMA Frame	Watts††	Wt. lbs.	Price
9 GT 1980C	1725	2 $\frac{1}{16}$ x 4 $\frac{1}{4}$	48	450	17	\$44.99
9 GT 1983C	1725	3 x 4 $\frac{1}{4}$	56	450	20	44.99
9 GT 1971C	1140	3 x 4 $\frac{1}{4}$	56	400	22	55.99
	1725			540		

*With $\frac{3}{16}$ -inch adapter sleeve, $\frac{3}{16}$ -inch flat on shaft ††Full-load input watts

Capacitor-start $\frac{1}{2}$ -HP Motor. For hard-starting belt-driven blowers such as fans and furnaces with central air conditioning.

CONSTRUCTION: Sleeve bearings. 1725 rpm. Single-end $\frac{3}{8}$ -in. shaft, $\frac{3}{16}$ -in. sq. keyway. Resilient mount—3x4 $\frac{7}{8}$ in. (NEMA 56 frame). Mount in any position . . . drip-proof in horizontal.

ELECTRICAL INFORMATION: 115 or 208-230-volt, 60-Hertz AC. 650 full-load input watts. Does not include cord or switch. Overload protector. Electrically reversible.

ORDERING INFORMATION: See warranty below.

9 GT 1972C—Shipping weight 22 pounds.....\$77.99

FULL 1-YEAR WARRANTY ON CRAFTSMAN® MOTORS, BENCH GRINDERS, MANUAL STAPLERS: If any of these items fail to give complete satisfaction within 1 year from date of purchase, return it to nearest Sears store throughout U.S. Sears will replace it, free of charge. This warranty gives you specific legal rights, you may also have other rights which vary from state to state.

$\frac{1}{2}$ -HP Motor \$44.99 NEMA 48 frame



$\frac{1}{2}$ -HP Motor \$77.99



Motor Mount



Floating Motor Rail Set



Switch



Adjustable Pulley



CRAFTSMAN® V-Belts Low as \$1.59

Motor Mount.

Fastens to motor base to help maintain proper V-belt tension. Motor provides weight for belt tension. Mounts on top of bench or on side of tool stand.

CONSTRUCTION: Swivel type . . . fits all size motors. Steel. Punched for bolts.

ORD. INFO: Bolts not incl. Wt. 1 lb. 12 oz.

9 GT 2730.....\$3.99

Motor Rail Set.

For motors up to 1 HP. Helps provide proper belt tension.

CONSTR: Aluminum 2 $\frac{3}{8}$ to 5 in. between centers. Incl. fasteners, 2 clips.

ORDERING INFO: Shpg. wt. 15 oz.

9 GT 2265.....Set \$2.95

Pkg. of 2 extra clips. For setting motor in more positions.

ORDERING INFO: Shpg. wt. 6 oz.

9 GT 2268.....Pkg. \$1.45

CRAFTSMAN® Power Tool Switch.

CONST: Pull-on/ Push-off switch, locking key. Mount on power tools or work bench. Key hole slots for mounting.

ELEC. INFO: 6-ft., 3-wire cord. Use only with ground power source. Not for equipment rated at more than 15 amps or more than $\frac{3}{4}$ HP at 125 v.

ORD. INFO: Wt. 2 lbs.

9 GT 13633.....\$12.99

Adjustable Pulley.

CONSTRUCTION: Machined cast-iron construction. Class 3 threaded barrel, balanced, set-screws. Locking does not mar barrel threads. Diameter adjustment in $\frac{1}{16}$ -inch increments. Outside diameter is 3.15 inch. Bore size $\frac{1}{2}$ inch. Use for 3L or 4L belts. Pitch 1.7 or 2.5 or 1.9 to 2.9 inches.

ORDERING INFO: Shpg. wt. 1 lb. 4 oz.

9 GT 28072.....\$4.99

V-belts.

Balanced to run true. Tough, yet elastic enough to handle heavy shock loads. High twist cover fabric is neoprene impregnated. Length-coding assures you of matching for multiple drives. $\frac{1}{2}$ -inch width.

ORDER INFO: See chart. Measure width across the outside surface of belt being replaced. Measure length around outside edge, not in groove.

Note: Check manufacturer's number on old belt.

Catalog No.	Length	Mfr's. No.	Wt.	Each
9 GT 1624	24 in.	4L240	4 oz.	\$1.59
9 GT 1628	28 in.	4L280	5 oz.	1.59
9 GT 1629	29 in.	4L290	5 oz.	1.59
9 GT 1630	30 in.	4L300	5 oz.	1.59
9 GT 1632	32 in.	4L320	5 oz.	1.69
9 GT 1633	33 in.	4L330	5 oz.	1.69
9 GT 1634	34 in.	4L340	5 oz.	1.69
9 GT 1635	35 in.	4L350	5 oz.	1.69
9 GT 1636	36 in.	4L360	5 oz.	1.79
9 GT 1637	37 in.	4L370	5 oz.	1.79
9 GT 1638	38 in.	4L380	6 oz.	1.79
9 GT 1639	39 in.	4L390	6 oz.	1.89
9 GT 1640	40 in.	4L400	6 oz.	1.89
9 GT 1641	41 in.	4L410	6 oz.	1.89
9 GT 1642	42 in.	4L420	6 oz.	1.89
9 GT 1648	48 in.	4L480	7 oz.	2.09

CRAFTSMAN® Heavy-duty Motors for farm and industrial equipment like augers, compressors and grain elevators



Variable-speed Motor

Constant torque at any speed between 300 and 1600 rpm. . . . for conveyors, feed mixers, piston or gear pumps


1/2 HP. Variable speed, constant torque up to 24 ounce-feet. Not for use where motor is expected to provide downhill braking.

CONSTRUCTION: Ball bearings. Solid-state circuitry for infinite speed adjustments from 300 to 1600 rpm. Separate blower motor keeps drive motor cool through total rpm range. Mounts at any angle. . . . drip-proof in horizontal position. NEMA 56, 143T, 145T mounting holes. 5/8-inch diameter by 17 1/2-inch long shaft, 1 1/4 x 3/16-inch key. Mounting dimensions: 9 1/2 x 7 1/2 x 15 1/8 inch. Rigid-mount base with 5 1/2 x 3, 4 and 5-inch mounting capabilities.

ELECTRICAL INFO: Induction run, 115-volt, 60-Hertz AC. 670 watts at high speed, 1200 watts at low speed. 8-foot, 3-wire cord. Draw from AC power without converting to DC. On-off, reversing switch, speed control, thermal overload protector reset switch located on control panel.


ORDERING INFORMATION: See warranty on opposite page.

9 GT 1260C—Shipping weight 37 pounds\$264.99



Make sure Heavy-duty Motors fit

"A"—length of housing (excluding shaft). "B"—from bottom of base plate to housing top. "C"—bottom of base plate to center of shaft. "D"—maximum width of housing. Measurements in inches.



Catalog No.	A	B	C	D	Catalog No.	A	B	C	D
9 GT 1260C	13 1/16	9 7/16	3 1/2	7 1/2	9 GT 1209	16 1/8	10 1/2	5 1/4	15 1/16
9 GT 1240C	9 7/8	8 5/8	3 1/2	6 1/2	9 GT 12011N	16 1/8	10 1/2	5 1/4	15 1/16
9 GT 1241C	10 5/8	8 5/8	3 1/2	6 1/2	9 GT 1200C	9 9/16	7 1/16	3 1/2	9 7/8
9 GT 1242L	10 5/8	8 5/8	3 1/2	6 1/2	9 GT 1201L	10 9/16	7 1/16	3 1/2	9 7/8
9 GT 1243C	10 5/8	8 5/8	3 1/2	6 1/2	9 GT 1202L	10 9/16	7 1/16	3 1/2	9 7/8
9 GT 1244N	14 7/16	9 1/4	4 1/2	13 3/32	9 GT 1203L	10 9/16	7 1/16	3 1/2	9 7/8
9 GT 1228C	9 7/8	9 7/16	3 1/2	9 11/16	9 GT 1204L	12 29/32	9 11/16	4 1/2	13 1/32
9 GT 1229C	11 1/32	9 7/16	3 1/2	9 11/16	9 GT 1205L	12 29/32	9 11/16	4 1/2	13 1/32
9 GT 1230L	11 1/32	9 7/16	3 1/2	9 11/16	9 GT 1206C	8 1/2	6 21/32	3 1/2	6 1/4
9 GT 1231C	9 7/8	9 7/16	3 1/2	9 11/16	9 GT 1207C	8	6 21/32	3 1/2	6 1/4
9 GT 1232N	15 1/8	9 1/4	4 1/2	13 3/32	9 GT 1208C	9	6 21/32	3 1/2	6 1/4
9 GT 1223C	8 1/2	8 1/2	3 1/2	8 5/8	9 GT 12012N	14 5/8	11	5 1/4	12 1/16
9 GT 1224C	9 1/2	8 7/8	3 1/2	8 5/8	9 GT 12013N	16 1/8	11	5 1/4	12 1/16

NOTE FOR ALL MOTORS ON THESE 2 PAGES: NEMA frame sizes are given for all motors. The National Electrical Manufacturers Association (NEMA) is an organization that develops standards for motors, one of which governs motor dimensions. This means any motor of a certain NEMA frame size is interchangeable with another of the same frame size. Important dimensions like base mount and shaft height will be the same.

SHIPPING NOTE: "F" items (as 9 GT 1209N) sent from Wausau, Wisconsin factory. Pay motor carrier charges from factory. Allow extra time. No C.O.D.'s.

... there's a big selection of Heavy-duty and Farm-duty Motors and Accessories in our 1978 Suburban, Farm and Ranch Catalog ... ask for your FREE copy at your Sears Catalog Selling Unit or ask for 39GT7417 the next time you phone in an order.


SEARS HAS IT

Low Voltage and No Voltage Protective Switches. In event of power failure, prevents equipment from re-starting unexpectedly when power returns.

For single-phase motors up to 2 HP, 120-volt coils. 9 GT 12024—Shipping weight 2 pounds\$46.99

For single or three-phase motors up to 2 HP, 230-volt coils. 9 GT 12022—Shipping weight 2 pounds\$49.99

For single-phase motors up to 2 HP or three-phase motors up to 5 HP. Also provides motor protection. 230-volt coils. 9 GT 12023—Shipping weight 4 lbs. 15 oz.\$89.99



(3 thru 8) Line Shaft, Accessories

Mount line shaft, couplings and collar on bench or as overhead drive. Use with 1/2-HP or larger motor. Line Shaft—use 1/2-inch for light tools; 3/4 or 1-inch for heavier machines and larger motors. Rigid Coupling—use to connect shaft to couplings. Flexible Coupling—use to connect motor to line shaft. Line Shaft Collar—helps reduce endwise drift. Has 3/4-inch bore with bushings for 1/2 and 3/4-inch shafts. Pillow Block—supports shaft. . . . permanently-lubricated bronze bearings.

ORDERING INFORMATION:

Item	Catalog No.	Size	Accessory	Shpg. wt.	Each
(3)	9 GT 28394	1 1/2, 3/4 in.	Rigid Coupling	8 oz.	\$3.99
	9 GT 2833	1 1/2 x 24 in.	Steel Line Shaft	1 lb. 8 oz.	1.89
(4)	9 GT 2834C	1 1/2 x 48 in.	Steel Line Shaft	3 lbs.	3.49
	9 GT 2830C	3/4 x 48 in.	Steel Line Shaft	5 lbs.	4.49
	9 GT 2835C	3/4 x 48 in.	Steel Line Shaft	7 lbs.	5.45
(5)	9 GT 27501	1/2 in.	Pillow Block	11 oz.	4.99
	9 GT 27502	3/4 in.	Pillow Block	11 oz.	4.99
	9 GT 27503	3/4 in.	Pillow Block	11 oz.	4.99
(6)	9 GT 28255	1 1/2, 3/4 in.	Line Shaft Collar	6 oz.	1.59
(7)	9 GT 28404	1 1/2, 3/4 in.	Flexible Coupling	13 oz.	5.49
(8)	9 GT 2820	1/4 in.	Cup Oiler	2 oz.	29c

(1 and 2) Capacitor-start Motors for hard-starting equipment

For tools requiring high-starting torque. All induction run except 5-HP motors which are capacitor run.

CONSTRUCTION: Permanently lubricated ball bearings. Fan-cooled. Rigid base mount. Mount in any position. . . . open-frame drip-proof in horizontal position; enclosed motors drip-proof in any position.

ELEC. INFO: 60-Hertz, AC (see volts in chart). No switch or cord. Electrically reversible. Not sparkproof.

ORDERING INFO: See warranty, opposite page, Shipping Note at left.

Catalog Number	HP	RPM	Frame	Base Mount (in.)	Shaft Diam. (in.)	Volts	Watts††	Overload protector	Shpg. wt. lbs.	Price
(1) With open-frame drip-proof steel housing.										
9GT1240C	1	1725	143T	4x5 1/2	7/8	115 or 230	1200	Manual reset	32	\$97.99
9GT1241C	1 1/2	1725	145T	5x5 1/2	7/8	115 or 230	1600	Manual reset	37	119.99
9GT1242L	2	1725	145T	5x5 1/2	7/8	115 or 230	2200	None	43	124.99
9GT1243C	2	3450	145T	5x5 1/2	7/8	115 or 230	2400	None	43	124.99
9GT1244N	5	1700	184T	5 1/2 x 7 1/2	1 1/8	230	5500	Manual reset	91	284.99
9GT1209N	7 1/2	1725	215T	7x8 1/2	1 3/8	230	7590	None	179	499.99
9GT12011N	10	1725	215T	7x8 1/2	1 3/8	230	10580	None	203	649.99

(2) With totally enclosed aluminum housing.										
9GT1228C	1	1725	56	3x4 7/8	5/8	115 or 230	1200	Manual reset	35	104.99
9GT1229C	1 1/2	1725	143T	4x5 1/2	7/8	115 or 230	1600	Manual reset	40	139.99
9GT1230L	2	1725	145T	5x5 1/2	7/8	115 or 230	2200	None	46	154.99
9GT1231C	2	3450	145T	5x5 1/2	7/8	115 or 230	2200	None	37	154.99
9GT1232N	5	1705	184T	5 1/2 x 7 1/2	1 1/8	230	5500	Manual reset	91	299.99

(2) With totally enclosed steel housing.										
9GT1223C	1 1/2	1725	56	3x4 7/8	5/8	115 or 230	660	Manual reset	26	75.99
9GT1224C	2 1/4	1725	56	3x4 7/8	5/8	115 or 230	850	Manual reset	32	79.99

††Full-load input watts

Three-phase Motors

CONSTR.: Re-greaseable ball bearings. Mount in any position. Rigid base mount. Single-end shaft. Cast-iron end brackets. 9 GT 1206C, 9 GT 1207C, 9 GT 1208C are open-frame/drip-proof. All others enclosed; fan-cooled.

ELECTRICAL INFORMATION: Run on 208-230/460-volt, 60-Hertz AC. No switch or cord. Electrically reversible. Use where 3-phase AC power is available.

ORDERING INFO: See warranty, opposite page, Shipping Note at left.

Catalog Number	HP	RPM	Frame	Base mount	Watts††	Shaft	Shpg. wt.	Price
With steel housing.								
9 GT 1206C	1 1/2	1725	56	3 x 4 7/8 in.	620	5/8 in.	20 lbs.	\$59.99
9 GT 1207C	1 1/2	3450	56	3 x 4 7/8 in.	520	5/8 in.	19 lbs.	54.99
9 GT 1208C	1	1725	143T	4 x 5 1/2 in.	972	5/8 in.	39 lbs.	99.99
9 GT 1201L	1 1/2	1725	145T	5 x 5 1/2 in.	1120	5/8 in.	24 lbs.	69.99
9 GT 1202L	2	1725	145T	5 x 5 1/2 in.	1404	5/8 in.	43 lbs.	129.99
9 GT 1203L	2	3450	145T	5 x 5 1/2 in.	1816	5/8 in.	47 lbs.	149.99
With aluminum housing.								
9 GT 1204L	3	1725	182T	4 1/2 x 7 1/2 in.	2750	1 1/8 in.	44 lbs.	159.99
9 GT 1205L	5	1725	184T	5 1/2 x 7 1/2 in.	4320	1 1/8 in.	66 lbs.	189.99
9 GT 12012N	7 1/2	1725	213T	5 1/2 x 8 1/2 in.	4508	1 1/8 in.	119 lbs.	279.99
9 GT 12013N	10	1725	215T	7 x 8 1/2 in.	5980	1 3/8 in.	139 lbs.	349.99

(9 thru 11) CRAFTSMAN® V-pulleys for motors or machines

CONSTRUCTION: Zinc alloy, aluminum finish. Grooves machined to maximum accuracy. . . . helps reduce belt slipping, power loss. Bore reamed to exact size.

Determine motor pulley diameter by multiplying machine pulley diameter by machine rpm wanted. Divide this figure by motor rpm.

Determine machine pulley diameter by multiplying motor pulley diam. by motor's rpm rate. Divide this figure by machine rpm you want.

(9) Single-groove V-pulleys with hubs.

Socket-head setscrew. Fit 3/4 (3L) or 1/2-inch (4L) V-belts, except 9 GT 2800 which is for 3/4-inch (3L) belt only. 5/8, 3/4-inch bores have standard keyway.

ORDERING INFORMATION:

Catalog Number	Outside diameter	Bore size	Wt. lbs. oz.	Each
9 GT 2800	1 1/2 in.	1/2 in.	4	\$1.09
9 GT 28011	2 in.	1/2 in.	6	1.19
9 GT 28012	2 in.	3/4 in.	6	1.19
9 GT 28021	2 1/2 in.	1/2 in.	7	1.79
9 GT 28022	2 1/2 in.	3/4 in.	7	1.79
9 GT 28031	3 in.	1/2 in.	9	1.99
9 GT 28032	3 in.	3/4 in.	9	1.99
9 GT 28041	4 in.	1/2 in.	11	2.39
9 GT 28042	4 in.	3/4 in.	12	2.39
9 GT 28051	5 in.	1/2 in.	13	2.99
9 GT 28052	5 in.	3/4 in.	14	2.99
9 GT 28061	6 in.	1/2 in.	1	3.99
9 GT 28062	6 in.	3/4 in.	1	3.99

*These pulleys are spoke type.

(10) Cone V-pulleys.

Three or four-step design. Socket-head setscrew. Pulleys are made to fit 3/4-inch and 1/2-inch V-belts. Pulleys with 5/8-inch bores have standard keyway.

ORDERING INFORMATION:

Catalog Number	Bore (in.)	Step diam. (inches)	Wt. lbs. oz.	Each
9GT27881	1 1/2	3 1/8, 2 1/2, 2	1	\$3.99
9GT27882	3 1/8	3 1/8, 2 1/2, 2	1	2.39
9GT27921	1 1/2	4, 3 1/8, 2 1/2, 2	1	7.49
9GT27922	1 1/2	4, 3 1/8, 2 1/2, 2	1	8.49
9GT27931	1 1/2	5, 4, 3, 2	1	10.49
9GT27932	1 1/2	5, 4, 3, 2	1	12.49

(11) Hubless Single-groove V-pulleys.

Socket-head setscrew. Fit 3/4-inch (3L) or 1/2-inch (4L) V-belts. 2 1/2, 3-inch diameter pulleys in 5/8-inch bores have standard keyways.

ORDERING INFORMATION:

Catalog Number	Outside diameter	Bore in.	Shpg. wt.	Each
9 GT 29011	2 in.	1/2	5 oz.	\$1.19
9 GT 29012	2 in.	3/4	5 oz.	1.19
9 GT 29021	2 1/2 in.	1/2	6 oz.	1.79
9 GT 29022	2 1/2 in.	3/4	6 oz.	1.79
9 GT 29031	3 in.	1/2	7 oz.	1.99
9 GT 29032	3 in.	3/4	8 oz.	1.99






Bench Power
Tool Shop

CRAFTSMAN® Steel Stands and Leg Sets

They provide a sturdy work platform and reduce power tool vibration thanks to 18-gauge steel, double-braced construction, and rigid motor mounts . . . they have adjustable rubber-padded leveling feet, too

Stands

For radial, table, and band saws; shapers, and belt-disc sanders

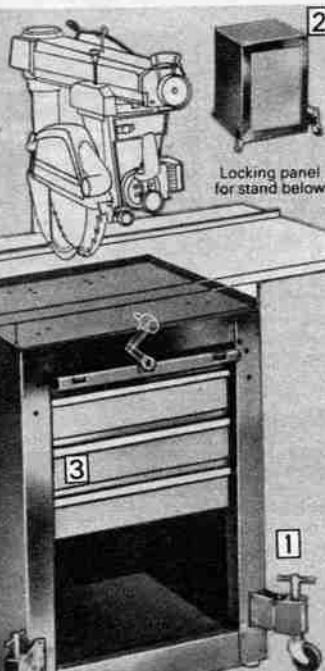

Locking panel for stand below


Casters sold separately below

Stand for all CRAFTSMAN Radial Saws

Save \$17 total \$101.95
Sep. prices \$84.95

Stand with 3 drawers and locking front panel

For 8, 9, 10-inch table saws
\$42.99

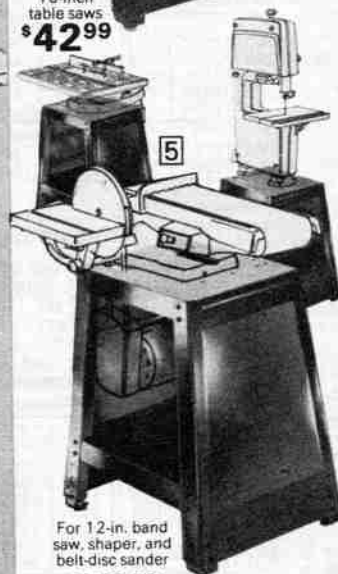

For 12-in. band saw, shaper, and belt-disc sander
\$42.99

Leg Sets


For shaper, sander-grinder, belt-disc sander, all table, radial, and band saws




For all CRAFTSMAN Radial Saws
\$32.99



For CRAFTSMAN band saws, shaper, belt-disc sander
\$33.99

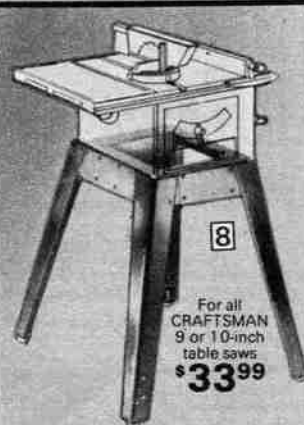

For all CRAFTSMAN 9 or 10-inch table saws
\$33.99

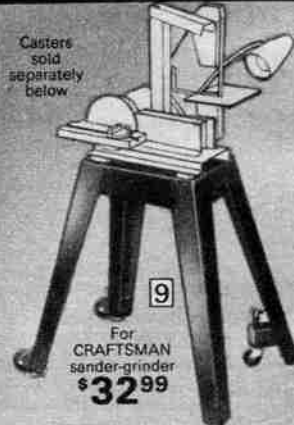

Casters sold separately below

For CRAFTSMAN sander-grinder
\$32.99

(1) Stand for radial saws alone. Heavy-gauge steel. Charcoal-gray enamel finish. 24x25x32 $\frac{3}{4}$ in. Rubber-padded leveling feet. Storage area. ORDER INFO: Casters, drawers not included. 9 GT 22205L—Shipping weight 57 pounds \$52.99

(2) Locking Front Panel. When not in use, panel slides inside of cabinet. When closed, panel covers drawers, locks front. Red finish. Includes 2 keys. ORDERING INFORMATION: 9 GT 10335C—Shipping weight 11 lbs. . . . \$12.99

(3) Drawer. Heavy-gauge steel . . . red finish. Rust-resistant galvanized slides are smooth sliding. 16 $\frac{1}{2}$ x15 $\frac{1}{2}$ x4 $\frac{3}{4}$ inches deep. Aluminum pulls. ORDERING INFORMATION: 9 GT 10326—Shipping weight 9 lbs. . . . Ea. \$11.99

Stand with 3 drawers and locking front panel. Includes three drawers (3) and locking panel (2). ORDERING INFORMATION: Sent unassembled. 9 GT 1008L5—Shipping weight 95 lbs. . . . \$84.95

(4, 5) Stands for table and band saws CONSTRUCTION: Stamped steel construction. A-frame design . . . provides you with an exceptionally sturdy, steady work surface. Adjustable rubber-padded leveling feet that resist creeping and marring of floors. Charcoal gray finish.

(4) For CRAFTSMAN 8, 9, or 10-inch table saws. Top 19 $\frac{1}{2}$ x15 $\frac{1}{4}$ inches overall. Height adjusts up to 3 $\frac{3}{4}$ inches from 23 $\frac{1}{2}$ to 26 $\frac{3}{4}$ inches. ORDERING INFORMATION: Sent unassembled. Shipping weight 32 pounds. 9 GT 22214C \$42.99

(5) For CRAFTSMAN 12-inch band saw, wood shaper, and belt-disc sander. Top 19 $\frac{1}{2}$ x15 $\frac{1}{4}$ inches. Height adjusts from 27 $\frac{3}{4}$ to 30 $\frac{3}{4}$ inches. Includes motor mount. ORDERING INFO: Unit sent unassembled. Shipping weight 39 pounds. 9 GT 22213C \$42.99

(6 thru 9) Leg Sets

CONSTRUCTION: Heavy 18-gauge steel provides sturdy support and proper working heights. Rubber-padded adjustable leveling feet for uneven floors . . . resist creeping and marring of floors. Leg sets are sent unassembled.

ORDERING INFORMATION: Each leg set fits only the CRAFTSMAN power tool it is listed under.

(6) For all radial saws 9 GT 22238C—Shipping weight 31 lbs. . . . \$32.99

(7) For band saws, shaper, belt-disc sander 9 GT 22236C—Shipping weight 27 lbs. . . . \$33.99

(8) For all table saws. Shipping weight 21 lbs. 9 GT 22237C—For 7 $\frac{1}{2}$ -inch saws \$29.99

9 GT 22235C—For 9, 10-inch saws \$33.99

(9) For sander grinder 9 GT 22239C—Shipping weight 25 lbs. . . . \$32.99

(10) Casters for power tool stands, cabinets

CONSTRUCTION: Heavy duty. Can support up to 400 pounds. Set includes two adjustable 2 $\frac{1}{2}$ -in. front swivel wheels with T-handles for height adjustment. Also includes two 3-in. non-swivel wheels for the rear. Both made of extra strong phenolic plastic. For stands shown on this page, and all Craftsman stands, cabinets, leg sets.

ORDERING INFORMATION: Shpg. wt. 6 lbs. 11 oz. 9 GT 22208 Set \$21.99



Versatile work lights . . . mount on benches, tools, walls, and stands



34-inch hinged neck \$19.99

18-inch flexible neck \$14.99

(11) 34-inch Work Light with spring-tension control

CONSTR: Aluminum vented shade helps keep light from over-heating. Shade distributes light without creating shadows. 34-in. heavy gauge steel arm stays put due to spring tension control. MOUNTINGS: Clamp-on and wall-type included.

FINISH: Outside finished in electrostatically applied, oven-baked enamel . . . scratch resistant. Inside of shade coated with dull gloss enamel reflector paint . . . will not yellow.

ELEC. INFO: Use max. 60-w. bulb. 110-120-v., 60-Hz. AC. On/off switch on top of shade. 6-ft. cord. UL listed.

ORDER INFO: Wt. 3 lbs. 10 oz. 9 GT 2484 \$19.99

(12) CRAFTSMAN Work Light, flexible neck

Mount lamp right on machine for best light.

CONSTR: Vented shade . . . inner shield keeps it cool outside. Shade is flexible.


ACCESSORIES: Mounting brackets. Bulb not incl.

ELEC. INFO: Use maximum 60-watt bulb. 110-120-volt, 60-Hertz AC. On/off switch. 6-foot cord. UL listed.

ORDER INFO: Wt. 2 lbs. 12 oz.

With 18-inch neck 9 GT 2480 \$14.99

With 24-inch neck 9 GT 2481 \$16.99

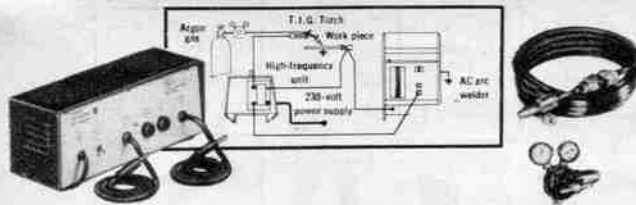

This CRAFTSMAN Outfit converts your arc welder to the versatile T.I.G. process **\$175.00** Outfit

This T.I.G. (Tungsten Inert Gas) unit enables you to weld metals of a very light gauge... also aluminum, bronze, stainless steel, nickel and others up to 1/4 in. thick. Use both Arc Stabilizer and T.I.G. Torch to connect AC or AC/DC arc welders.

HOW IT WORKS: Arc stabilizer operates continuously to maintain arc. Provides long arc for AC units—tip need not touch metal during welding. Process floods molten metal with non-combining inert gas (usually argon). Prevents oxidation, embrittlement of weld. No preheating. T.I.G. torch uses 1/8-in. diameter tungsten electrode because it won't pass impurities onto weld.

ARC STABILIZER AND CABINET: Air-cooled. Rated for 30% duty cycle. 13 1/2 x 8 1/2 x 9 1/2 inches.

T.I.G. TORCH: Forged brass with shut-off valve, regulator, hose and 3 collets (1/16, 3/32, 1/8-in.)

ELEC. INFO: Stabilizer uses 230-v. outlet, wires into welder.

ORDER INFO: Gas not included. See warranty below.

9 GT 20149C2—Shipping weight 26 lbs. Outfit \$175.00

Arc Stabilizer alone. As described above. For simplified starts with AC or AC/DC welders in stick electrode process.

ORDERING INFO: See warranty below. Shpg. wt. 21 lbs.

9 GT 20119C.....\$99.00

T.I.G. Torch alone. As described above. Gas not included.

ORDERING INFO: See warranty below. Shpg. wt. 4 lbs. 12 oz.

9 GT 20112.....\$99.00

Electrode Cup (not shown).

SIZES, ORDER INFO: Wt. 3 oz.

For 1/16, 3/32-inch electrodes. 9 GT 20163.....\$3.49


For 1/8-inch electrodes. 9 GT 20168.....\$4.49

Tungsten-tip Electrodes (not shown).

SIZES, ORDER INFO: Wt. 3 oz. 9 GT 20161—1/16-inch.....\$1.75

9 GT 20164—3/32-inch.....3.99

9 GT 20166—1/8-inch.....5.49



CRAFTSMAN Welder/Alternators

Use for welding and stand-by power

55 to 180-amp. 120-240-v. AC Unit

Pushbutton start

\$1175.00

Manual start **\$1075.00**



50 to 200-amp DC Unit

\$1475.00

ENGINE: 14 HP. Solid-state, single-cyl., 4-stroke gasoline engine. Air-cooled. 1 1/2-gal. fuel tank. Stellite™ exhaust valve, seat and rotor.

WELDER: AC alternator, control circuit produce steady arc. Handles up to 3/16-in. electrodes. 6 current settings: 55, 80, 105, 130, 155, 180-amps.

ALTERNATOR: 5000 watts. 240-volt with two 120-v. outlets for auxiliary AC output. 25 and 40-amp manual reset circuit breakers.

DIMENSIONS: 23x24x31 inches high with 2-man carrying frame.

ELEC. INFO: AC welding output: 55 to 180-amp range. 25-v., AC auxiliary output: 120-240 volts, 60 Hertz.

ORDER INFO: Warranty, Note below.

Push-button, electric-start Unit. Order 12-v. Garden-Recreation DieHard® Battery 28-96032N separately from Big Book.

F9 GT 20198N—Wt. 317 lbs. \$1175.00

Manual-start Unit. Recoil starter. F9 GT 20194N—Wt. 310 lbs. \$1075.00

(1) Dolly Kits. Tubular steel frame. Rubber-tired wheels.

ORDER INFO: See Note at right.

For F9 GT 20194N, F9 GT 20198N. Shpg. wt. 28 lbs.

F9 GT 20195.....Kit \$75.00

For F9 GT 20199N. Wt. 36 lbs.

F9 GT 2019.....Kit \$95.00

(2) Accessory Kit. For welder/alternators above. Incl. helmet; 18-ft. electrode, 12-ft. ground cables; holder and clamp.

ORDERING INFO: See Note, right.

F9GT20196—Wt. 12 lbs. Kit \$49.95

ENGINE: Electric-start. 16 HP. 2-cyl., 4-stroke gasoline engine. Air-cooled. 7.3-gal. fuel tank. Stellite™ exhaust valve, valve seat and rotor.

WELDER: AC alternator and control circuit produce steady arc. Handles up to 3/16-in. electrodes. 10 settings: 50, 60, 75, 90, 105, 120, 140, 160, 180, 200 amps.

ALTERNAT: 3500 w. Two 120-v. outlets for aux. AC output.

DIMENSIONS: 36x29x27 1/4 in. with 2-man carrying frame.

ELEC. INFO: DC welding output: 50 to 200-amp range. 28-volt, AC auxiliary output: 120 volts, 60 Hertz.

ORD. INFO: Warranty, Note below. Order 12-v. Garden-Recreation DieHard® Battery 28-96032N separately from Big Book. Wt. 570 lbs.

F9 GT 20199N.....\$1475.00

NOTE: "F" items (as F9 GT 20196) sent from factory in Minneapolis, MN. (exc. item 2 from Paris, TN); allow time for C.O.D.s. "F" items with "N" (as F9 GT 20199N) pay motor carrier charges from factory; on other "F" items allow handling from Dist. Center.



These 2 CRAFTSMAN® Arc Welders are as easy as ABC to operate

- A Material thickness gauge lets you verify thickness of metal to be welded and indicates recommended electrode size
- B Electrode size index holes let you verify correct electrode size
- C Top-mounted, one-hand control... set indicator at recommended electrode size and you automatically have correct heat setting

Metalworking Shop



230-amp AC Dual-range Arc Welder

30 to 140-amp range for improved arc stability... 45 to 230-amp range for minimum current draw

\$175.00

295-amp AC Dual-range Arc Welder

30 to 200, 40 to 295-amp ranges... weld any gauge metal

\$195.00

Weld, pierce or cut metal... use to repair auto bodies or farm and construction equipment. Use with carbon arc torch (9 GT 20071) sold separately on page 34 to braze, repair light gauge metal, sweat copper tubing and construct metal sculptures.

TRANSFORMER: Advanced aluminum-wound design lets you weld with all electrodes up to 3/16-in. diam., even low hydrogen and stainless steel electrodes. Dual range gives improved arc stability at the 30 to 140-ampere range (simplifies striking and holding arc) and has minimum current draw at the 45 to 230-ampere range. Permanently lubricated cooling fan increases duty cycle (ratio of welding time to cooling time per 10 min. cycle). Extended duty cycle means fewer pauses for cooling so you can weld for longer periods of time.

HEAT SELECTIONS: Exclusive top-mounted control lets you change and lock in heat settings with one hand. Infinite heat selections from 30 to 230 amperes in two ranges.

CABINET: Steel with baked enamel finish. Flow-thru, side-to-side ventilation allows unit to be placed against wall without worry of poor air circulation. 15x12x21 inches high.

ACCESSORIES: 12-ft. electrode, 10-ft. ground cables. Electrode holder, ground clamp, full-face welders' helmet, input cord with 230-v. plug, instructions and how-to-weld manual.

ELEC. INFO: 230-v., 60-Hz. AC. UL listed, CSA listed, NEMA rated. Requires 50-amp circuit, wiring. Order receptacle 9 GT 20691 on page 34.

ORDERING INFORMATION: See warranty below left and other electrical specifications in chart below.

9 GT 20137N—Wt. 95 lbs.\$175.00

Welds any metal from light to heavy gauge. Use to repair auto bodies or farm and construction equipment.

TRANSFORMER: Advanced aluminum-wound design lets you weld with all electrodes up to 1/4-in. diam., even low hydrogen and stainless steel electrodes. Two ranges: 30 to 200-amp for increased arc stability (simplifies striking and holding arc) and 40 to 295-amp for minimum current draw. Permanently lubricated cooling fan and insulation increase duty cycle (ratio of welding time to cooling time per 10 min. cycle). Extended duty cycle means fewer pauses for cooling so you can weld for longer periods.

HEAT SELECTIONS: Exclusive top-mounted control lets you change and lock in heat settings with just one hand. Infinite selections from 30 to 295 amperes in two ranges.

CABINET: Steel with baked enamel finish. Flow-thru, side-to-side ventilation allows unit to be placed against wall without the worry of overheating due to poor circulation. Measures 15x12x21 inches high.

ACCESSORIES: Includes 12-ft. electrode and 10-ft. ground cables, heavy-duty electrode holder and professional-type ground clamp. Full-face welder's helmet, operating instructions and how-to-weld manual.

ELECTRICAL INFORMATION: 230-volt, 60-Hertz AC. UL listed, NEMA rated. Requires 60-amp circuit and direct wiring.

ORDERING INFORMATION: See other electrical specifications in chart below and warranty information below left.

9 GT 20139N—Shpg. wt. 110 lbs.\$195.00

(3) Wheel Kit for dual-range arc welders. Give portability to your welder (fits either 9 GT 20137N, 9 GT 20139N or 9 GT 20144). Includes two 6-inch rubber-tired wheels, top-mounted handle for maneuvering and bottom front brace for stability. Assembly and installation instructions included.

9 GT 20486—Shpg. wt. 4 lbs. 2 oz.Kit \$9.95

IMPORTANT ELECTRICAL SPECIFICATIONS: Before ordering, first check voltage, cycle, phase and capacity of your power line with your electric utility company or local REA office.

Catalog Number	Rated input amps	Short circuit input amps	Fuses amps	Rod sizes (inches)	Max. KVA	Max. KW	Max. open circuit secondary	Duty cycle	Max. power factor
9 GT 20142	15	28	15	1/16-3/64	2.1	1.6	38-volts	20%	74.0
9 GT 20143	20	36	20	1/16-3/32	2.8	2.0	38-volts	20%	71.7
9 GT 20144	38	55	40	1/16-3/16	9.6	6.3	45-volts	†	66.0
9 GT 20137	50	66	50	1/16-3/16	10.8	7.1	80-volts	†	66.0
9 GT 20139	60	100	60	1/16-3/4	14.8	10.3	80-volts	†	70.0
9 GT 20177	65.7	92	60	1/16-3/16	18.6	8.0	78-volts	†	47.6
9 GT 20178	*80	155	60	1/16-3/4	22.7	11.2	78-volts	†	49.3
	*76	130	60	1/16-3/4	20.7	11.2	78-volts	†	54.1

*Wired for 208-volts **Wired for 230-volts

†From 20% to 100% depending on amp setting



Arc Welders, Electrodes and Welding Accessories



CRAFTSMAN® Home-n-Shop 30-200-amp Arc Welder

CRAFTSMAN® Light-duty Home-n-Shop Arc Welders

Units need no special wiring... plug into 115-v. outlets with 15-amp breakers or fuses.

20-70-amp Welder. Easy as ABC aids give recommended electrode size, verify electrode diam., give recommended heat setting for chosen electrode.

TRANSFORMER: Aluminum-wound, convection cooled.

HEAT SELECTION: Top-mounted, 1-hand control. Infinite heat settings from 20 to 70 amps.

CABINET: Steel, baked enamel finish. Cable-wrap/carrying handle. 10 1/2 x 10 1/2 x 10 3/4 in.

ACCESS: Electrode holder/carbon arc torch, helmet, cables, asstd. electrodes, instr.

ELEC. INFO: 2030 w., 110-120-v. 60-Hz. AC. UL listed.

ORD. INFO: Warranty and additional elec. specs. on p. 33. 9 GT 20143C—Wt. 41 lbs. \$99.00

50-amp Welder (not shown). **TRANSFORMER:** Aluminum-wound, convection cooled.

HEAT SELECTION: Constant 50-amp. Not adjustable.

CABINET: Steel. 10 1/2 x 10 1/2 x 10 in.

ACCESS: Same as those described for 9 GT 20143C above.

ELEC. INFO: 1650 w., 110-120-v. 60-Hz. AC. UL listed.

ORD. INFO: Warranty and additional elec. specs. on p. 33. 9 GT 20142C—Wt. 31 lbs. \$59.00

Weld, pierce or cut metal... use to repair auto bodies, farm and construction equipment. Use with carbon arc torch (1) sold separately at right to braze, repair light gauge metal and sweat copper tubing.

TRANSFORMER: Advanced, aluminum-wound with permanently lubricated cooling fan... increases duty cycle (ratio of welding time to cooling time per 10 min. cycle). Welds with all electrodes up to 3/16 in. in diameter.

HEAT SELECTIONS: Top-mounted control lets you change and lock in heat settings with just one hand. Infinite heat selections from 30 to 200 amps.

CABINET: Steel, baked enamel finish. 13x13x17 in. high. Easy as ABC welding aids give you recommended electrode size, verify electrode diam. and give you recommended heat setting for chosen electrode. Flow-thru, side-to-side ventilation for efficient cooling.

ACCESS: 12-ft. electrode, 10-ft. ground cables, full-face helmet, electrode holder, ground clamp, instr. manual.

ELECTRICAL INFO: 230-v., 60-Hz., AC. UL listed, NEMA rated. Uses 50-amp circuit and wiring. Order receptacle (5) sold separately at right.

ORD. INFO: Warranty, electrical specifications, page 33. 9 GT 20144N—Wt. 83 lbs. \$139.00

Electrodes and Rods for use with light-duty welders 9GT20143C, 9GT20142C at left

Types	Size	Catalog Number	Pkg. of	Wt. lbs.	Price
Welding	1/16	9 GT 20264	54*	12	\$2.39
Welding	1/8	9 GT 20216	22*	10	1.95
Contact	1/8	9 GT 20285	21*	12	2.89
Brazing	1/32	9 GT 20266	34*	4	6.39

*Quantities figured by weight, may vary due to density of electrode flux

CRAFTSMAN® AC/DC Welding Outfits

Choose from three kinds of welding current: AC for regular welding; DC reverse polarity for vertical and overhead welding jobs; DC straight polarity for all-position welding.

TRANSFORMER: Alum.-wound. Permanently lubricated cooling fan helps increase duty cycle (ratio of welding time to cooling per 10-min. cycle).

HEAT SELECTIONS: Set controls on top of cabinet... infinite heat selection on AC from 25-230 amps, DC from 25-180 amps.

CABINET: Heavy steel cabinet, baked enamel finish. Cabinet is 11 1/2 x 13 1/2 x 21 inches high.

ACCESSORIES: Includes helmet, power cable with plug, ground cable, grounding clamp, electrode cable with electrode holder, instr. manual.

ELECTRICAL INFO: 230-volt, 60-Hz., AC. **ORD. INFO:** See warranty, other specs. on p. 33. Order receptacle (5) above right. 9 GT 20177N—Shpg. wt. 123 lbs. \$279.00

250-amp AC/DC Arc Welder. As above, with extended ranges... AC, 30-250 amps; DC, 30-250 amps. No cord, must be wired direct. 9 GT 20178N—Shpg. wt. 138 lbs. \$325.00



(1 thru 12) Accessories for AC and AC/DC Arc Welders

(1) Twin Carbon Torch Use with any 230-v. arc welder to braze, solder or heat. Insulated thermoset plastic handle. 14 in. long. **ORDERING INFO:** Shpg. wt. 2 lbs. 11 oz. 9 GT 20071... \$21.49

Cored Carbons for (1) **SIZES, ORDERING INFO:**

Size in.	Catalog Number	Pkg. of	Wt. oz.	Pkg. price
1/4	9 GT 20236	8	6	\$3.79
3/8	9 GT 20237	6	8	3.79
1/2	9 GT 20238	4	8	3.79

(2) Chipper Brush Steel head, wire brush. **ORDERING INFO:** Shpg. wt. 1 lb. 7 oz. 9 GT 20713... \$7.75

Extra Brush for (2) Shpg. wt. 7 oz. 9 GT 20714... \$1.45

(3) Electrode Holder Copper alloy jaws. 300-amp cap. Holds electrodes to 1/4 in. diam. **ORD. INFO:** Wt. 1 lb. 2 oz. 9 GT 20711... \$9.95

(4) Ground Clamp Copper alloy jaws, 500-amp capacity. **ORD. INFO:** Wt. 1 lb. 2 oz. 9 GT 20712... \$4.95

(5) Receptacle. For 230-v. arc welders. Rated 50-amps at 250-v., 2-pole, 3-wire ground. Surface-mounted. Hardware incl. **ORD. INFO:** Wt. 1 lb. 3 oz. 9 GT 20691... \$3.95

(6) Electrode Holder Top-grain leather. Tunnel belt loop, steel clip. **ORDER INFO:** Wt. 9 oz. 9 GT 26021... \$4.99

(7) Dolly Kits. With 2 rubber wheels, axle, handle. Unassembled. **ORDER INFO:** For 9-20177N, 9-20178N and former 9-20176 Shpg. wt. 4 lbs. 9 GT 20483... Kit \$9.95

For 9-20153, 9-20133 Shpg. wt. 1 lb. 4 oz. 9 GT 20481... Kit \$5.99

For 9-20137, 9-20139 and 9-20144 Shpg. wt. 4 lbs. 2 oz. 9 GT 20486... Kit \$9.95

(8) "Arc Weld It Yourself". Manual. Explains AC arc welding processes. Illust. 36 pgs. **ORDER INFO:** Wt. 4 oz. 9 GT 20256... 95c

(9) Welders' Aprons Each apron made from one piece split-leather. Rivet reinforced at stress points. Full-front bib with two pencil pockets. Shoulder straps. Pearl-gray color. **ORDER INFO:** Full-front. 42 inches long. Wt. 3 lbs. 4 oz. 9 GT 26024... \$19.99

Knee-length. 28 inches long. Wt. 2 lbs. 3 oz. 9 GT 26022... \$16.99

(10) Accessory Kit Incl. 15 contact electrodes, chipper hammer, welder's gloves and observers' face shield with No. 10 filter. **ORDERING INFO:** Shpg. wt. 2 lbs. 1 oz. 9 GT 20224... Kit \$14.50

(11) Heavy-duty Helmet. Ratchet-type adjustment. Slide-in, lift-front plate holder. Cover lens and No. 10 filter. **ORDERING INFO:** Shpg. wt. 1 lb. 4 oz. 9 GT 1322... \$14.50

(12) Homeshop Helmet. No. 10 filter. **ORDERING INFO:** Shpg. wt. 1 lb. 4 oz. 9 GT 1321... \$7.50

Lenses for (11 and 12) above (not shown) **ORDER INFO:** No. 10 Filter. Wt. 4 oz. 9 GT 13277... \$1.45

No. 12 Filter. Shpg. wt. 4 oz. 9 GT 13272... \$1.55

2.5 Magnifying. Shpg. wt. 4 oz. 9 GT 13273... \$6.49

Extension Cord (not shown). 25-ft. 3-wire. For 200 and 230-amp arc welders. **ORDERING INFO:** Wt. 8 lbs. 15 oz. 9 GT 20699... \$34.99

Electrodes for Arc Welders

Contact-type Electrodes. For sheet metal fabricating, production welding, auto and farm equipment repairs. General-purpose (type E-7014) start on contact, hold steady arc, restrike on contact. For AC or DC welders.

SIZES, ORDERING INFO: Save with 25-lb. bulk package.

Size inches	Pkg. of	Catalog No. Wt. 3 lbs. 2 oz.	Price	25-lb. pkg.	Catalog No. Wt. 25 lbs.	Price
5/32 x 12	81*	9 GT 20212	\$3.45	320*	9 GT 20208C	\$23.49
3/8 x 14	37*	9 GT 20213	2.95	219*	9 GT 20209C	23.49
1/2 x 14	25*	9 GT 20214	2.95			

Deep-penetrating Electrodes. For repair of autos, farm equipment, structural pipes. Weld in any position... horizontal, vertical, overhead. For AC or DC welders.

SIZES, ORDERING INFO: Save with 25-lb. bulk package.

Size inches	Pkg. of	Catalog No. Wt. 3 lbs. 2 oz.	Price	25-lb. pkg.	Catalog No. Wt. 25 lbs.	Price
5/32 x 12	60*	9 GT 20205	\$2.75	925*	9 GT 20202C	\$23.49
1/4 x 14	47*	9 GT 20206	2.75	410*	9 GT 20203C	23.49
3/8 x 14	33*	9 GT 20207	2.75	288*	9 GT 20204C	23.49

Size inches	Pkg. of	Catalog No. Wt. 3 lbs. 2 oz.	Price	25-lb. pkg.	Catalog No. Wt. 25 lbs.	Price
5/32 x 12	107*	9 GT 20217	\$3.45	400*	9 GT 20219C	\$23.49
1/4 x 14	46*	9 GT 20218	2.95			
3/8 x 14	34*	9 GT 20222	2.95			

*Quantities figured by weight, may vary due to density of electrode flux

Machinable Cast-iron Electrodes. Nickel core wire. No pre-heating needed. 1/4 x 13 in. long. Weld cast-iron to steel, nickel alloys, copper. **ORDERING INFO:** Package of 12. Shpg. wt. 3 lbs. 2 oz. 9 GT 20201... \$6.49

Sheet Metal Electrodes. Tipped for quick starts. 1/16 x 9 inches long. For household repair and metal sculpturing. **ORDERING INFO:** Package of 47*. Shipping weight 10 oz. 9 GT 20215... Pkg. \$1.95

Cutting Electrodes. 5/32 x 12 in. For piercing and cutting. **ORD. INFO:** 11 in pkg.* Wt. 1 lb. 2 oz. 9 GT 20223. Pkg. \$2.95

Hard-surfacing Electrodes. Tough alloy resists abrasion. 1/8 x 14 in. For welds on equipment subject to wear. **ORD. INFO:** 23 in pkg.* Wt. 1 lb. 2 oz. 9 GT 20046. Pkg. \$3.75

Electrode Assortment. Incl. 40 deep-penetrating (6013) in 1/16, 1/8, 3/32-in. sizes; Ten 1/8-in. deep-penetrating (6011); Five 1/8-in. contact (7018); five 1/8-in. hard-surfacing; five 1/8-in. cutting; two 1/8-in. machinable nickel. **ORD. INFO:** Pkg. of 67. Wt. 4 lbs. 4 oz. 9 GT 20473. Pkg. \$9.95

Low-hydrogen Electrode. For high-carbon steel and castings as well as all ferrous metals. 1/8 x 14 in. **ORD. INFO:** 36* in pkg. Wt. 3 lbs. 2 oz. 9 GT 20474. Pkg. \$3.45

\$279⁰⁰

25-230-amp AC or 25-180-amp DC ranges



CRAFTSMAN® 2-stage Oxy-Acetylene Torch Outfit

2-stage regulation maintains a constant pressure to torch
... automatically makes adjustments as cylinder pressure changes

Welding Tips (not shown).
Use with torch 9 GT 54406
sold at right or with outfits 9-
5441, 9-5444, 9-5446 only.

SIZES, ORDER INFO:

Catalog No.	Size	Capacity
9 GT 54441	No. 1	up to 1/2 in.
9 GT 54442	No. 2	1/2 to 3/4 in.
9 GT 54443	No. 3	3/4 to 1 in.
9 GT 54444	No. 4	1 to 1 1/2 in.
9 GT 54445	No. 5	1 1/2 to 2 in.
9 GT 54446	No. 6	2 to 2 1/2 in.
9 GT 54447	No. 7	2 1/2 to 3 in.
9 GT 54448	No. 8	3 to 4 in.

Wt. ea. 5 oz. Ea. \$5.95

Cutting Tips (not shown).
For use with cutting attachment
9 GT 54407 sold at right
and with outfits 9-5441, 9-5444
and 9-5446 only. Propane and
MAPP® Gas tips let you use
alternate fuels where acetylene
is unavailable or inconvenient
to use.

SIZES, ORDER INFO:
Oxy-Acetylene Tips ... Wt.
5 oz. Propane, MAPP® Gas
Tips ... Shpg. wt. 4 oz.

Catalog Number	Tip size	Cutting capacity, inches	Price each
Oxy-Acetylene Tips			
9 GT 54451	No. 0	3/8 to 1/2	\$6.49
9 GT 54452	No. 1	1/2 to 1	6.49
9 GT 54453	No. 2	1 to 2	6.49
9 GT 54454	No. 3	2 to 3	6.49
9 GT 54455	No. 4	3 to 6	6.49

Catalog Number	Tip size	Cutting capacity, inches	Price each
Propane Tips			
9 GT 54456	No. 1	3/8 to 1	\$6.49
9 GT 54457	No. 3	2 to 3	6.49

Catalog Number	Tip size	Cutting capacity, inches	Price each
MAPP® Gas Tips			
9 GT 54458	No. 1	3/8 to 1	\$6.95
9 GT 54459	No. 3	2 to 3	6.95

CRAFTSMAN® Single-stage Oxy-Acetylene Torch Outfit

General-purpose unit for home, shop, farm or garage ... cut steel up to
2 in. thick and weld steel up to 1/4 in. thick with tips sold separately at left

Welding Tips (not shown).
For torch in outfits 9 GT
5432, former 9-5443, torch 9GT
54491, former 9-54401 only.

SIZES, ORDERING INFO:

Catalog Number	Tip size	Welding capacity
9 GT 54431	No. 1	up to 1/2 in.
9 GT 54432	No. 3	1/2 to 3/4 in.
9 GT 54433	No. 5	3/4 to 1 in.
9 GT 54434	No. 7	1 to 1 1/4 in.

Wt. 4 oz. Each \$4.95

Cutting Tips (not shown).
For cutting attach. in outfit (9
GT 5432) and cutting attachment
(9 GT 54402) only.

SIZES, ORDERING INFO: Wt. 3 oz.

Catalog Number	Tip size	Cutting capacity, inches	Price each
Oxy-Acetylene Tips			
9 GT 54435	No. 0	1/2 to 1	\$5.95
9 GT 54436	No. 1	1 to 2	5.95
9 GT 54437	No. 2	2 to 3	5.95

Catalog Number	Tip size	Cutting capacity, inches	Price each
Propane Tip			
9 GT 54438	No. 1	1/2 to 1	5.95

FULL ONE YEAR WARRANTY
ON CRAFTSMAN GAS WELDING
TORCH AND REGULATOR.
If, within 1 year from the
date of purchase, any Craftsman
Gas Welding Torch or Regulator
fails due to a defect in material or
workmanship, Sears will replace it,
free of charge. Warranty service
is available by simply returning
torch or regulator to nearest
Sears store throughout the United
States. This warranty gives you
specific legal rights, and you
may also have other rights which
vary from state to state.

SHIPPING NOTE

Alaska, Hawaii customers ...
propane, MAPP® gas cylinders
must by law, be sent via surface
transportation. Contact your local
Selling Unit for info.

Cuts steel up to 6 inches thick and welds steel
up to 3/16 inches thick with tips
sold separately at left



Complete Outfit **\$179.00**

TORCH: Brass-forged body. Needle-type valve stems for
delicate flame settings. Anti-flashback mixer with double
"O" ring for leak-free, hand-tight connections. Comfort-
balanced handle. Includes three welding tips (Nos. 3, 5
and 7) to fusion weld steel up to 1/4 inch thick. Torch can
weld steel up to 3/16 inch thick with optional tips sold
separately at left.

CUTTING ATTACHMENT: Brass-forged cutting head. In-
cludes No. 1 cutting tip that cuts steel up to 1 inch thick.
Torch can cut steel up to 6 inches thick with optional
cutting tips sold separately at left.

REGULATORS: 2-stage regulation maintains constant
pressure to torch, automatically makes adjustments as
cylinder pressure drops. 2 pressure-tested, brass-forged
regulators. 2-in. diam. gauges with easy-to-read white-
on-black faces and Lexan® plastic covers.

ACCESSORIES: 20 feet of Siamese hose with brass fit-
tings, plastic coverall goggles, spark lighter, wrench and
how-to-weld-and-cut manual.

ORDERING INFORMATION: See warranty below, left.

2-stage Oxy-Acetylene Outfit

9 GT 5441C—Shpg. wt. 20 lbs. Outfit \$179.00

Welding Torch alone

9 GT 54406—Shipping weight 1 lb. 11 oz. \$39.50

Cutting Attachment alone

9 GT 54407—Shipping weight 1 lb. 11 oz. \$42.50

Oxygen Regulator alone

9 GT 54302—Shipping weight 4 pounds \$54.00

Acetylene Regulator alone

9 GT 54303—Shipping weight 4 pounds \$54.00

TORCH: Brass-forged body. Needle-type valve stems for
delicate flame settings. Anti-flashback mixer with needle
shut-off valve that seals tight. Includes three welding
tips (Nos. 3, 5 and 7) to fusion weld steel up to 1/4 inch
thick.

CUTTING ATTACHMENT: Brass-forged. No. 0 tip cuts
steel up to 1/2 inch thick. Torch can cut steel up to 2
inches thick with optional cutting tips sold at left.

REGULATORS: Single-stage regulation. Two pressure-
tested, brass forged regulators. Regulators have 2-inch
diameter gauges with easy-to-read white-on-black faces
and Lexan® plastic covers.

ACCESSORIES: Includes 12 feet of Siamese hose with
brass fittings, safety goggles, spark lighter, wrench and
how-to-weld-and-cut manual.

ORDERING INFORMATION: See warranty below, left.

Single-stage Oxy-Acetylene Outfit

9 GT 5432—Shipping weight 13 lbs. 10 oz. \$139.00

Welding Torch alone

9 GT 54491—Shipping weight 12 ounces 34.50

Cutting Attachment alone

9 GT 54402—Shipping weight 14 ounces 34.50

Oxygen Regulator alone

9 GT 54403—Shipping weight 4 lbs. 4 oz. 34.50

Acetylene Regulator alone

9 GT 54404—Shipping weight 4 lbs. 4 oz. 34.50

(1) **Portable Oxygen-Acetylene Cylinder Outfit.** Steel cylinders, machined
brass valves. Storage, carrying rack. Acetylene "MC" cylinder holds 10 cu. ft.;
oxygen "R" tank holds 20 cu. ft. Measures 14x8x26 in. high.

ORDERING INFORMATION: Requires "MC" adapter (9 GT 54467) sold sepa-
rately on page 36. Shipped empty with local filling instructions.

9 GT 5406C—Shipping weight 28 pounds Outfit \$139.00

(2) **Truck for gas cylinders.** Holds 2 cylinders (not included): 1 oxygen (145-
cu. ft.); 1 acetylene (122-cu. ft.). Can also be used as a utility cart. Platform base
20x10 1/2 in. deep. Overall: 38 1/2 in. high. Tubular steel frame. Tool tray. 10-in.
semi-pneumatic rubber-tired wheels.

ORDERING INFORMATION: See "N" suffix note on page 69.

9 GT 5429N—Shipping weight 27 pounds \$39.99

(3) **Heavy-duty, high-wheel Truck for gas cylinders.** Handles up to two
300-cu. ft. cylinders (not included) for combined cylinder diam. of 18 1/2 in. Nylon
straps help keep cylinders secure. Platform base 21x9 1/2 in. deep. Stands
28x46 in. high. Tubular frame of 14-gauge steel. Wheels have 1/4-in. steel
spokes, 20x2 1/4 in. wide pneumatic rubber tires for easy rolling.

ORDERING INFORMATION: Shipping weight 46 pounds.

9 GT 54291L \$85.00

(1 thru 3) Cylinder Outfits and Trucks



Oxy-Acetylene
Cylinder Outfit

\$139.00



Cylinder
Truck

\$39.99



Heavy-duty
Truck

\$85.00

COMPLY
DISLAGEJ

Sears 35

Metalworking Shop



Gas Torch Outfits

CRAFTSMAN® Cut 'n Weld Kit
Single-stage, Oxy-Acetylene Kit lets you cut and weld with one torch, just change tips

\$99.00 without cylinders

CRAFTSMAN Cut 'n Weld Kit

TORCH: Brass-forged head and body with Lexan® plastic handle. Stainless steel valve stems for precise flame settings. Cut or weld with the same torch, just change tips. Includes tip for cutting steel up to 1/2-in. thick and tip for welding steel up to 1/2-in. thick. Cut steel up to 1-in. thick with tip (9 GT 54436) at right.

REGULATORS: Single-stage, brass-forged with 1 1/2-in. diameter gauges.

ACCESSORIES: Includes 8-foot flexible twin rubber hose with brass fittings, safety goggles, spark lighter and instructions.

ORDER INFO: See Warranty on page 35. Wt. 7 lbs. 8 oz. 9 GT 5449 \$99.00

MAPP® Gas Regulator (not shown). Allows use of MAPP gas instead of acetylene with Cut 'n Weld Kit. Aluminum. **ORDER INFO:** See warranty, page 35. Wt. 6 oz. 9 GT 54307 \$14.95

Acetylene Cyl. Adapters (not shown). Use acetylene regulator in Cut 'n Weld Kit on different sized cylinders. **ORDERING INFORMATION:**

For "B" Cylinders. Adapts CGA200 to CGA510.

9 GT 54468—Wt. 8 oz. \$5.49

For "POL" Cylinders. Adapts CGA200 to CGA510.

9GT54469—Wt. 11 oz. \$5.49

No. 1 Cutting Tip (not shown). Allows Cut 'n Weld or Porta-Torch kits to cut steel up to 1-inch thick. **ORDER INFO:** Wt. 3 oz. 9 GT 54436 \$5.95

CRAFTSMAN® Porta-Torch™

TORCH: Brass-forged head, body. Lexan® plastic handle. Stainless steel valve stems. Color-coded control valves (green for oxygen, red for MAPP® gas). Cut or braze steel with the same torch, just change tips. Incl. tip for cutting steel up to 1/2-in. thick, tip for brazing steel. Cut steel up to 1-in. thick with tip (9 GT 54436) at left.

REGULATORS: Brass-forged, single-stage oxygen regulator. 1 1/2-in. diam. black on white dial. Pre-set MAPP® gas regulator.

ACCESSORIES: 8-ft. flexible twin neoprene hose with brass fittings, safety goggles, spark lighter, brazing rod, polyethylene carrying case with compartments for cylinders, torch, rods, etc. Instr.

CYLINDERS: Filled MAPP® gas cylinder holds 16.0 ounces by weight. Filled oxygen cylinder holds 20 cubic feet (refillable).

ORDER INFO: Warranty, Note on p. 35.

9 GT 54485C—Wt. 25 lbs. \$175.00

Extra No. 1 Welding/Brazing Tip. For Cut 'n Weld or Porta-Torch kits. 9 GT 54462—Shpg. wt. 3 oz. \$4.99

Gas Torch Accessories

(1) **Tool Box.** For Torch Outfits 9 GT 5441, 9 GT 5432 sold on page 35. 9 GT 54449—Wt. 2 lbs. 2 oz. \$8.99

Gas Rod Assortment (not shown). 60 copper-coated welding rods; 20 each 1/16, 3/32, 1/8-in.; also 30 flux-coated brazing rods; 15 each 3/32, 1/8-in. **ORDERING INFO:** Pkg. of 90. 9 GT 20072—Wt. 5 lbs. Pkg. \$9.95

Copper-coated Gas Rods (not shown). **ORDER INFO:** 18-in. Approx. 12 per pkg.

3/32-inch diameter

9 GT 20415—Wt. 14 oz. Pkg. \$1.95

1/8-inch diameter

9 GT 20416—Wt. 15 oz. Pkg. \$1.95

(2) **Flux-coated Gas Brazing Rods**

SIZES. **ORDERING INFO:** 18 inches.

3/32-inch diameter. Package of 12.

9 GT 20413—Wt. 14 oz. Pkg. \$2.95

1/8-inch diameter. Package of 12.

9 GT 20414—Wt. 12 oz. Pkg. \$2.95

Tip Cleaners (not shown).

ORDER INFO: Set of 12 with case.

9 GT 5424—Shpg. wt. 3 oz. Set \$2.95

Oxy-acetylene Welders' Handbook

(not shown). 306 pages. Illus. **ORDERING INFORMATION:**

9 GT 5412—Shpg. wt. 13 oz. \$5.95

(3) **Reverse Flow Check Valves.** De-

signed to stop accidental mixing of oxy-

gen and fuel gas in hose, regulator. Fac-

tory tested. UL listed. Incl. 2 valves.

ORDER INFO: Fits torch outfits on p. 35.

9 GT 54423—Shpg. wt. 5 oz. \$9.75

(4) **Adapters for Acetylene Tanks**

TYPES. **ORDER INFO:** Allows regulators

in torch outfits on page 35 to be used with

different size cylinders.

For "B" Cylinders. Adapts CGA510 to

CGA200.

9 GT 54466—Wt. 11 oz. \$5.49

For "MC" Cylinders. Adapts CGA510 to

CGA200.

9 GT 54467—Wt. 10 oz. \$5.49

(5) **Neoprene Twin-type Welding**

Hose. Oil resistant. Brass fittings.

ORDERING INFORMATION: 20 ft. long.

9 GT 54271—Wt. 5 lbs. 2 oz. \$15.99

(6) **Spark Lighter.** Includes 1 flint.

9 GT 5440—Shpg. wt. 4 oz. \$9.95

Extra Flints for (6) (not shown).

ORDERING INFO: Package of 6.

9 GT 54405—Shpg. wt. 2 oz. Pkg. 59c

(7) **Holder for Soap Stones** below.

ORDER INFO: One soapstone incl.

9 GT 54464—Shpg. wt. 4 oz. \$1.89

Soap Stones (not shown). For marking

metal.

ORDERING INFO: Package of 5.

9 GT 54465—Wt. 5 oz. Pkg. \$1.45

(8 thru 11) **Clamping Tools.** Heat-

treated, nickel-plated alloy steel.

(8) **Chain Clamp.** Holds and locks

around stock of any shape. Adjusts to

ratchet action. Won't crush thin-wall tub-

ing. 19-inch long chain.

ORDERING INFORMATION:

9 GT 54484—Wt. 1 lb. 14 oz. \$10.95

(9) **Sheet Metal Tool.** Adjusts to pliers

action. 3 1/8-in. jaw width. 1 1/4-inch throat

depth. 8 inches long.

ORDERING INFORMATION:

9 GT 54481—Wt. 1 lb. 5 oz. \$6.49

(10) **Welding Clamp.** Locks in place.

Jaws adjust 1 1/2 in. 9-in. long.

ORDERING INFORMATION:

9 GT 54482—Wt. 1 lb. 10 oz. \$7.49

(11) **"C" Clamp.** Set jaws, squeeze

to lock. Jaws adjust 3 inches. 11 inches long.

ORDERING INFORMATION:

9 GT 54483—Wt. 1 lb. 14 oz. \$7.49

(12) **Welders' Gloves.** Cowhide with

cotton flannel lining.

SIZES: M(9-9 1/2), L(10-10 1/2).

ORDERING INFO: State M or L.

C51 GT 26022F—Wt. 13 oz. \$7.97

(13) **Welders' Goggles.** Polyethylene.

Adjustable headband. Fits over glasses.

No. 5 filter for cuts to 6-in. thick, welds to

1/2-in. thick. 2x4 1/2-in. window.

ORDERING INFORMATION:

9 GT 18636—Shpg. wt. 9 oz. \$7.99

Replacement Filter for (13). No. 5.

9 GT 13275—Shpg. wt. 4 oz. \$1.59


(14) **Accessory Kit.** Includes soap-

stone with holder, welding gloves, tip


cleaner, steel filler rods.

9GT20225C—Wt. 1 lb. 7 oz. Kit \$14.50

CRAFTSMAN® Bench

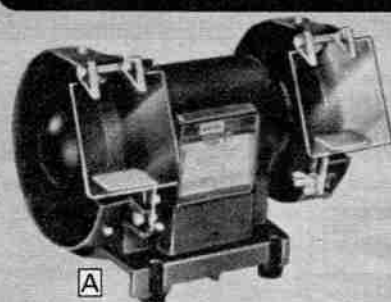

Hobby Grinder with two 5x1/2-inch wheels \$39.00

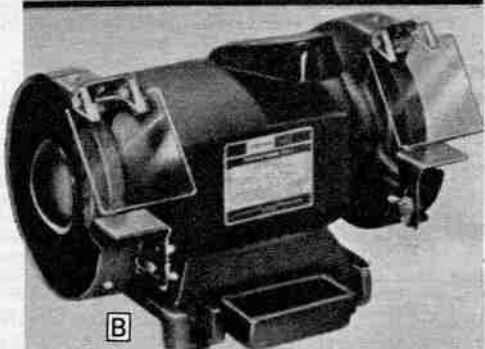

1/4-HP Grinder with two 6x1/2-inch wheels \$49.00

(A) Hobby Grinder

MOTOR: Shaded-pole motor with direct drive. No-load speed of 3450 rpm. Permanently lubricated sleeve bearings for smooth operation.

GRINDING WHEELS: Two 5x1/2-inch aluminum-oxide wheels (medium-fine, medium-coarse). 7/8-inch clearance between wheels. Removable wheel covers.

HOUSING: Durable ABS thermoplastic. Rubber mounts. Adjustable Lexan® plastic shatter-resistant eye shields. Adjustable tool rests. Top-mounted on-off slide switch. 3/8x24 in. threaded shaft with 1/2-in. arbor bushing. 10 3/8x5x7 1/16 in. high.

ELEC. INFO: 115-v., 60-Hz. AC. 135 maximum idle watts. UL listed. 6-foot, 3-wire cord.

ORDER INFO: See Warranty below, Safety Note p. 37. Use grinding wheels for 1/2-in. shaft.

9 GT 1931—Shipping weight 10 lbs. \$39.00

(B) 1/4 HP Grinder

MOTOR: 1/4 rated HP (develops 1/3 HP). Split-phase, induction motor with direct drive ... no brushes or belts. No-load speed of 3580 rpm. Permanently lubricated roller bearings.

GRINDING WHEELS: Two 6x1/2-inch aluminum-oxide wheels (medium-fine, medium-coarse). 10 3/8-inch clearance between wheels. Removable wheel covers.

HOUSING: ABS thermoplastic, the same material that's used to make motorcycle helmets. Rubber mounts help reduce vibration. Adjustable Lexan® plastic shatter-resistant eye shields. Removable quench tray. Swivel lamp adjusts (bulb incl.). Top-mounted on-off slide switch. 1/2x20-inch threaded shaft. 14 1/8x6 1/2x9 9/16 in. high.

ELEC. INFO: 115 v., 60-Hz. AC. 271 maximum idle watts. UL listed. 6-foot, 3-wire cord.

ORDER INFO: See Safety Note, opposite page. See Warranty, order extra light bulb below.

9 GT 1932C—Shipping weight 20 lbs. \$49.00

1/2-HP Grinder (not shown). Like grinder (B) above, except with 1/2 rated HP (develops 1/2 HP) and two 6x3/4-inch wheels. 286 max. idle watts.

ORDER INFO: See Safety Note, opposite page. See Warranty, order extra light bulb below.


9 GT 1933C—Shipping weight 21 lbs. \$69.00

Replacement Light Bulb for 1/4, 1/2 HP Grinders. 34 GT 3803—Shpg. wt. 1 oz. \$1.99

FULL ONE YEAR WARRANTY ON CRAFTSMAN BENCH GRINDERS: If this Craftsman Bench Grinder fails to give complete satisfaction within one year from date of purchase, return it to nearest Sears store throughout the U.S. and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Grinders have these great features:

- ① Permanently lubricated motor bearings for long life
- ② Adjustable shatter-resistant Lexan® plastic eye shields
- ③ Removable wheel covers for simplified wheel changes
- ④ Adjustable tool rests to give you the correct working angle
- ⑤ Rubber-mounted base for reduced vibration

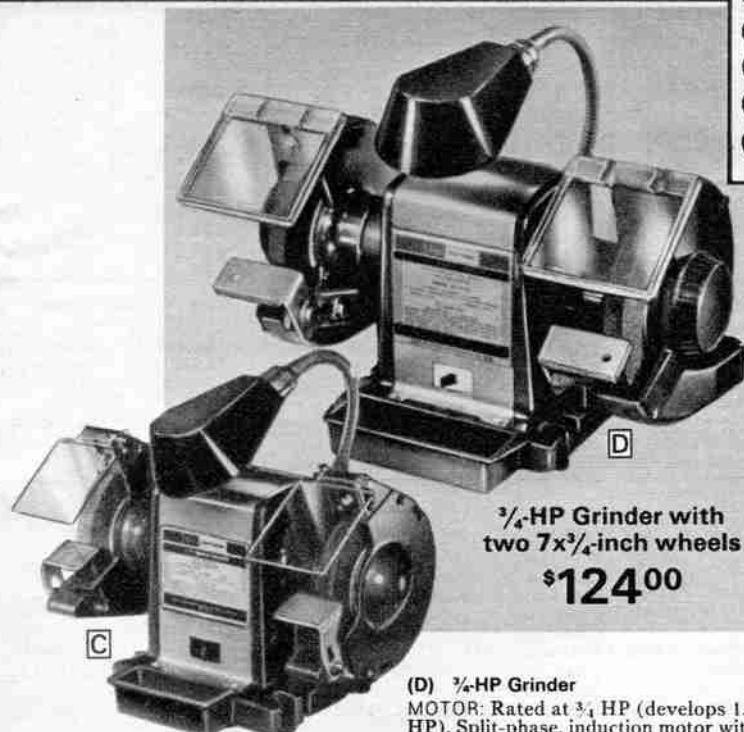

**1/2-HP Grinder with
two 6x3/4-inch wheels**
\$99⁰⁰

(C) 1/2-HP Grinder

MOTOR: Rated at 1/2 HP (develops 3/4 HP). Split-phase, induction motor with direct drive . . . no brushes or belts. No-load speed of 3580 rpm. Permanently lubricated ball bearings.

GRINDING WHEELS: Two 6x3/4-in. aluminum-oxide wheels (medium-fine and medium-coarse). 11 1/8-in. clearance between wheels. Removable wheel covers.

HOUSING: Flat-face aluminum housing. Die-cast aluminum base has rubber mounts to help reduce vibration. Adjustable Lexan® plastic shatter-resistant eye shields. Adjustable tool rests and spark arrestors. Removable quench tray. Flexible 16-inch gooseneck lamp (bulb not incl.). Front-mounted on-off toggle switch. 1/2-20 threaded shaft. 15 3/8x7 5/8x10 1/4 inches high.

ELECTRICAL INFO: Operates on 115 v., 60-Hz. AC. 300 max. idle watts. UL listed. With 6-foot, 3-wire cord.

ORDERING INFORMATION: See Warranty on opposite page, see Safety Note at right.

9 GT 1934C—Wt. 28 lbs. \$99.00

(D) 3/4-HP Grinder

MOTOR: Rated at 3/4 HP (develops 1.1 HP). Split-phase, induction motor with direct drive . . . no brushes or belts to maintain. No-load speed of 3580 rpm. Permanently lubricated ball bearings for smooth operation and long life.

GRINDING WHEELS: Two 7x3/4-inch aluminum-oxide wheels (medium-fine and medium-coarse). 12-inch clearance between wheels lets you work on large pieces. Removable wheel covers help simplify wheel changes.

HOUSING: Flat-face aluminum housing allows easy access to grinding wheels. Die-cast aluminum base has rubber mounts to help reduce vibration. Adjustable Lexan® plastic shatter-resistant eye shields let you view workpiece clearly. 2-way adjustable tool rests help you obtain the correct working angle. Adjustable spark arrestors. Dust chutes direct grindings away from operator. Large removable quench tray for cooling metals. Flexible 16-inch gooseneck lamp directs light where you need it (bulb not included). Front-mounted on-off toggle switch. 1/2-20 threaded shaft. Measures 17 1/2x7 5/8x10 3/8 inches high.

ELECTRICAL INFO: Operates on 115 volts, 60-Hertz AC. 325 maximum idle watts. UL listed. With 6-foot, 3-wire cord.

ORDERING INFORMATION: Full One Year Warranty on opposite page, see Safety Note at right.

Shipping weight 35 pounds.
9 GT 1935C \$124.00



**Our finest Bench Grinder has 1-HP motor
and two 8x1-inch wheels**
\$149⁰⁰

MOTOR: Rated at 1 HP (develops 1 1/2 HP). Capacitor-start, split-phase, induction motor with direct drive . . . no internal brushes to replace, no belt to break or wear out. No-load speed of 3580 rpm. Permanently lubricated ball bearings for smooth operation and extended motor life.

GRINDING WHEELS: Two 8x1-inch aluminum-oxide wheels (medium-fine and medium-coarse). 12-inch clearance between wheels lets you work on large pieces. Removable wheel covers simplify wheel changes.

HOUSING: Flat-face aluminum housing allows easy access to grinding wheels. Die-cast aluminum base has rubber mounts to help reduce vibration. Adjustable Lexan® plastic shatter-resistant eye shields let you view workpiece clearly. Adjustable tool rests help you obtain the correct working angle. Adjustable spark arrestors.

Dust chutes direct grindings away from operator. Built-in quench tray for cooling metals. Flexible 16-inch goose-neck lamp directs light where you need it for precision work . . . with separate on-off switch (bulb not included). Front-mounted on-off rocker switch. 3/4-18 threaded shaft. Measures 20x11 1/8x12 1/2 inches high.

ELECTRICAL INFORMATION: Operates on 110-120-volts or 230 volts, 60-Hertz AC. 340 maximum idle watts. UL listed. With 6-foot, 3-wire cord.

ORDERING INFORMATION: See Full One Year Warranty on opposite page, see Safety Note below.

9 GT 1936L—Shipping weight 48 pounds \$149.00

SAFETY NOTE:

Play it safe, wear one of our wide selection of safety goggles sold on page 57 when using power bench tools.

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details


**YOU CAN
DO IT**



. . . with our CRAFTSMAN® Grinders. Use them to keep your tools sharp . . . rough or finish-grind all types of ferrous metals. Our grinders have two wheels, each with a different grit, to help reduce wheel changes.

Attach the proper accessory and you can buff, scale and even sand. You'll be surprised at all the things you can do with your CRAFTSMAN® Grinder. All you need is a little know-how and you can do it!

See our Grinder Accessories on the next page

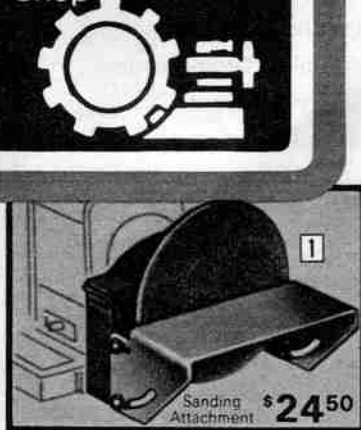

(1) Disc Sanding Attachment

CONSTRUCTION: Steel, 8-in. disc with 4x8 3/4-in. table. Just remove wheel and wheel housing to attach to grinder. Work table adjusts from 45° to 90°. Includes attaching hardware, 3 pressure sensitive back sanding discs (fine, medium, coarse), adapter for 1/2 or 3/8-in. shafts. Fits all CRAFTSMAN grinders except 9-1931, 9-1932, 9-1933.

ORDERING INFORMATION: 9 GT 19493—Shpg. wt. 8 lbs. \$24.50

Extra Sanding Discs. 8-in. diameter. GRIT. ORDER INFO: Package of 6. 9 GT 25381—Fine. Wt. 10 oz. \$4.49 9 GT 25382—Med. Wt. 11 oz. \$4.49 9 GT 25383—Coarse. Wt. 13 oz. \$4.49



CRAFTSMAN® Grinder-Sander Outfit

Includes bench grinder with motor rated at 1/2-HP develops 3/4-HP one 6x3/4-in. grinding wheel, worklight, sanding attachment and stand

\$110.00

MOTOR: Rated 1/2-HP develops 3/4-HP. Split-phase induction motor. No-load speed of 3580 rpm. Direct drive. Permanently lubricated ball bearings.

GRINDING WHEEL, SANDER: One 6x3/4-in. medium-coarse aluminum-oxide grinding wheel. Removable wheel cover. 8-inch sanding disc with 4x8 3/4-in. table that adjusts 45° to 90°. With fine, medium, coarse sanding discs.

HOUSING: Aluminum housing with rubber mounts to help reduce vibration. 17 3/8x7 3/8x10 1/4 inches high. Front-mounted toggle switch. 1/2x20-inch thread shaft. Flexible 16-in. gooseneck lamp. Grinder side has adjustable tool rest, spark arrestor, and adjustable Lexan® plastic eye shield. Removable quench tray for cooling hot metals.

STAND: See (4), above right.

ELECTRICAL INFORMATION: 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 3-wire cord. Maximum idle watts: 300.

ORDER INFO: See warranty, p. 36, Safety Note at right.

Shipping weight 43 pounds. 9 GT 19397C—Outfit \$110.00

Grinder/Sander without stand.

Shipping weight 32 pounds. 9 GT 19345C—\$99.00



(2) Grinding Attachment

Locks drill bit at proper angle for sharpening. For twist drill sizes: 1/8 to 3/4 inch. Nos. 1 to 30, A to Z, 3 to 19 millimeters.

CONSTR: Hardened steel body and cross-bar. Precision-built aluminum frame. Adj. for all popular drill point angles. Use with wheel (9 GT 64222) sold below right. Fits all CRAFTSMAN grinders.

ORDER INFO: See Safety Note below right. Wt. 2 lbs. 8 oz. 9 GT 6677—\$10.99

(3) Tool Holder

Holds tools at proper angle for sharpening. Fine feed adjustment. For hollow or conventional grind screwdrivers, plane blades, chisels, scraper blades, etc. Blade guide for sharpening blades and garden tools.

CONSTR: Made of cast aluminum and steel with plastic knobs. 3-in. rack and pinion travel. Fits all CRAFTSMAN grinders.

ORDER INFO: See Safety Note below right. Wt. 5 lbs. 8 oz. 9 GT 19595—\$24.50

(4) Tubular Steel Grinder Stand

CONSTRUCTION: Tubular steel frame, 32 inches high. Wide leg span for stability and minimal vibration. Fitted with rubber feet for quiet operation. Stand measures 26 inches wide, 24 inches deep. Fits all CRAFTSMAN grinders except 9-1931C.

ORDER INFO: See Safety Note below. 9 GT 29647C—Shpg. wt. 11 lbs. \$14.50

(5) CRAFTSMAN Pedestal Stand

CONSTRUCTION: Heavy-duty stand with tubular steel post, 2 3/4-inch diameter. Overall height, 32 1/2 inches. Cast-iron base bored for bolting to floor (bolts not included). 7 1/8x8 3/8-inch table fits all CRAFTSMAN grinders except 9-1931, 9-1932 and 9-1933.

ORDERING INFORMATION: See Safety Note below. 9 GT 2964C—Shpg. wt. 31 lbs. \$39.50

(6) Carbide Wheel Dresser

For dressing, shaping and removing glaze from grinding wheels.

CONSTRUCTION: Carbide rod enclosed in plastic handle.

ORD. INFO: Wt. 11 oz. 9 GT 6491—\$9.95

(7) Steel Wheel Dresser

CONSTRUCTION: High-carbon steel cutters.

ORDER INFORMATION: Shpg. wt. 2 lbs. 2 oz. 9 GT 6492—\$5.99

Extra Cutters for (7) Pkg. of 4. Wt. 2 oz. 9 GT 6495—Pkg. 79c

(8 and 9) CRAFTSMAN® Grinding Wheels

(8) Wheels for finish grinding, sharpening polishing and sharpening

USES: Fine grit for knives, keen-edge tools, finish grinding, polishing. Medium-fine grit for axes, wood-cutting tools, preparation for finishing. Medium-coarse grit for machine shop use.

CONSTRUCTION: Aluminum-oxide grains. 5, 6 and 7-in. wheels have 3/8-in. center hole and bushings for 1/2-in. shafts. 8-in. wheels have 3/4-in. center hole, bushings for 3/8-in. shaft.

GRIT, SIZE, ORDER INFO: See Safety Note, right.

Size	Min. shaft	Catalog No.	Shpg. wt.	Each	5 for
Fine 100-grit					
5x1/2	1/2 in.	9 GT 64243	1 lb. 1 oz.	\$2.49	\$11.20
5x3/4	1/2 in.	9 GT 64317	1 lb. 7 oz.	2.99	12.99
6x1/2	1/2 in.	9 GT 64319	1 lb. 6 oz.	3.19	13.99
6x3/4	1/2 in.	9 GT 64321	1 lb. 15 oz.	3.99	17.49
7x1	1/2 in.	9 GT 64353	2 lbs. 11 oz.	4.99	21.99
8x1	3/8 in.	9 GT 64354	4 lbs. 12 oz.	5.79	24.99

Medium-fine, 60 grit					
5x1/2	1/2 in.	9 GT 64244	1 lb. 1 oz.	\$2.49	\$11.20
5x3/4	1/2 in.	9 GT 64207	1 lb. 7 oz.	2.99	12.99
6x1/2	1/2 in.	9 GT 64209	1 lb. 6 oz.	3.19	13.99
6x3/4	1/2 in.	9 GT 64211	1 lb. 15 oz.	3.99	17.49
7x1	1/2 in.	9 GT 64214	3 lbs. 10 oz.	4.99	21.99
8x1	3/8 in.	9 GT 64355	4 lbs. 12 oz.	5.79	24.99

Medium-coarse, 36 grit					
5x1/2	1/2 in.	9 GT 64245	1 lb. 1 oz.	\$2.49	\$11.20
5x3/4	1/2 in.	9 GT 64356	1 lb. 8 oz.	2.99	12.99
6x1/2	1/2 in.	9 GT 64352	1 lb. 15 oz.	3.19	13.99
6x3/4	1/2 in.	9 GT 64232	1 lb. 15 oz.	3.99	17.49
7x1	1/2 in.	9 GT 64235	3 lbs. 10 oz.	4.99	21.99
8x1	3/8 in.	9 GT 64236	4 lbs. 12 oz.	5.79	24.99

(9) Grinding Wheels for twist drill bits

USES: For sharpening twist drill bits.

CONSTR: Aluminum oxide grains. 6x1 in. thick. Center hole 3/8-in. Bushings for 1/2-in. shaft.

ORDERING INFORMATION: See Safety Note below. Shipping weight 2 pounds 7 ounces.

9 GT 64222—Each \$4.99; 5 for \$21.99

Grinding Wheels for carbide-tip tools (not shown)

USES: For sharpening carbide-tip tools. May be used either wet or dry.

CONSTRUCTION: Fine grit. Vitrified (crystallized) green silicon carbide. 6x1 1/2 inch thick. Center hole 3/8 inch. Bushings for 1/2-in. shaft.

ORDERING INFORMATION: See Safety Note below.

Shipping weight 1 pound 6 ounces. 9 GT 64242—Each \$5.49; 5 for \$23.99

GRINDING SAFETY NOTE

(A) Do not grind on side of wheels. (B) Use only with straight relieved flanges as large as, or larger than shown on table below. (C) Use guard and shatter-proof glass shield covering 3/4 of wheel. (D) Never exceed rpm shown. (E) Wear safety goggles. (F) Stand aside for 1 minute after starting wheel. (G) Follow instructions on wheels. *Not for use on wood.*

Wheel diameter, inches	5	6	7	8
Flange diameter, inches	1 3/4	2	2 1/2	3
Maximum RPM	4966	4138	3600	3600

(10 thru 13) Buffing Wheels, Compound, Wire Wheels

(10) CRAFTSMAN Buffing Wheels

Spiral-sewn muslin with raked edges. 30 layers. Thread count 64x64 threads per inch. Fits 1/2 or 3/8-in. shaft. Use 2 or more for wide work areas.

SIZES, ORDER INFO: Use with compound (11).

Catalog Number	Diameter	Shipping weight	Each
9 GT 64933	4 inches	3 ounces	.99c
9 GT 64931	6 inches	6 ounces	\$1.69
9 GT 64932	8 inches	8 ounces	2.49

(11) CRAFTSMAN Buffing Compound Set

Four 3 ounce bars: emery (black), red rouge, white, Tripoli (brown).

ORDERING INFO: Use with buffing wheels (10).

9 GT 2896—Shpg. wt. 1 lb. 8 oz. Set \$1.99

CRAFTSMAN Buffing Compound

(not shown)

For metal, plastic. 3 ounce bar.

ORDERING INFO: Use with buffing wheels (10).

9 GT 2865—Shpg. wt. 7 ounces .89c

White Rouge Buffing Compound (not shown) For stainless steel, aluminum, cast brass and chrome. 3 ounce bar.

ORDERING INFO: Use with buffing wheels (10). 9 GT 2860—Shpg. wt. 8 ounces .89c

(12) CRAFTSMAN Wire Wheels

USES: Remove rust, paint. Use 2 or more in tandem for wide work areas.

ORDERING INFORMATION: 1/2-inch center holes also bushed for 3/8-inch shaft. 3/8-inch center holes bushed for 1/2-inch shaft.

Catalog No.	Diam.	Hole	Width	Shpg. wt.	Each
Fine					
9 GT 64818	5-in.	1/2-in.	1 1/2-in.	10 oz.	\$2.49
9 GT 64824	6-in.	3/8-in.	1 3/8-in.	15 oz.	2.99
9 GT 64815	7-in.	3/8-in.	1 1/2-in.	1 lb. 3 oz.	3.99
Coarse					
9 GT 64819	5-in.	1/2-in.	1 1/2-in.	11 oz.	\$2.19
9 GT 64812	6-in.	3/8-in.	1 3/8-in.	15 oz.	2.49
9 GT 64816	7-in.	3/8-in.	1 1/2-in.	1 lb. 3 oz.	3.99
9 GT 64813	8-in.	3/8-in.	1 1/2-in.	1 lb. 10 oz.	3.79

Wide-face Coarse Wheels



9 GT 64834—6-in. 3/8-in. 1-in. 1 lb. 12 oz. \$4.99

9 GT 64835—8-in. 3/8-in. 1 1/8-in. 3 lbs. 7.99

(13) CRAFTSMAN Commercial Production Wire Wheel

CONSTRUCTION: 2 sections: heavy-duty and carbon steel wire. 6-in. diameter face, 3/4 in. thick. 3/8-in. arbor hole.

ORDERING INFO: See Safety Note above. 9 GT 64814—Shpg. wt. 1 lb. 14 oz. \$7.99



CRAFTSMAN® Convertible Metal-cutting Band Saws

Cut through steel, aluminum, brass in vertical or horizontal positions



1

(1) Dry-cut 4 1/2-inch Band Saw

\$475.00 with stand and motor

Three blade speeds, adjustable feed rate for cutting various metal stock up to 4 1/2 inches round or 4x6 inches rectangular

Both saws swing to vertical position for precision contour cuts, slitting and notching




Both saws have ball-bearing blade guides

(2) Wet or dry-cut 7-inch Band Saw

\$950.00 with stand and motor

Four blade speeds and hydraulic feed provide fast, controlled cuts most materials, even cold-rolled steel. Cuts up to 7-in. round, 7x12-in. rectangular stock or 7x6-in. capacity at 45°

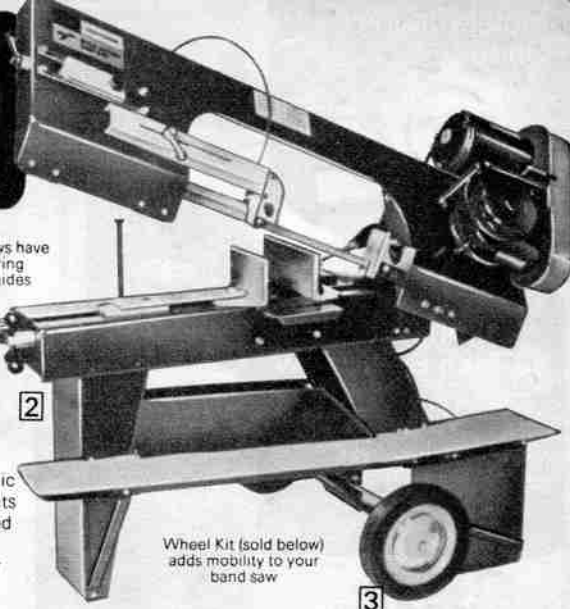

2

Wheel Kit (sold below) adds mobility to your band saw

3

MOTOR: Split-phase, rated 1/4-HP, 1725 rpm motor. No or low voltage manual reset protector helps prevent accidental starts.

HOUSING, TABLE, STAND: Precision-ground, cast-iron head. Heavy-gauge steel base with replaceable wear plate. Saw swings to vertical position for contour cuts, notching and slitting . . . 3x4-inch table. Sturdy steel base has two 8-inch diameter semi-pneumatic tires for increased mobility. Quick-action, variable-set vise adjusts for miter cuts from 45° to 90°. 44x22x38 inches high in horizontal position, 55 inches high in vertical position.

DRIVE, BLADE, CUTTING CAPACITY: V-belt drive system. Transmission has steel worm and bronze gear with permanently lubricated ball bearings and sealed gear box. 3 speeds: 65, 120, 220 feet per minute. Uses 64 1/2x1 1/2 inch wide blade. 3-axis, micro-align ball-bearing blade guides provide optimum accuracy and ease of adjustment. Cuts 4 1/2-inch round or 4x6-inch rectangular stock. Spring-tension, feed-rate adjustment. Automatic shut-off when cut is completed (in horizontal position only). Blade guard covers exposed portions of blade above and below cut area.

ACCESSORIES: V-belt, pulleys, 64 1/2x1 1/2-inch blade with 14 teeth per inch.

ELECTRICAL INFORMATION: 115-volt, 60-Hertz AC. 490 full load input watts. 4-foot, 3-wire cord.

ORDERING INFO: See tool warranty below right, motor warranty on p. 30.

9 GT 22965N—Shipping weight 142 pounds . . . \$475.00

MOTOR: Split-phase, rated 3/4-HP, 1725 rpm capacitor-start motor. No or low voltage manual reset protector. Pull-on/push-off switch.

HOUSING, TABLE, STAND: Heavy-duty steel. Saw swings to vertical position for contour cuts, notching, slitting . . . 3x4-in. table is flush with bed. Wet cut system for horizontal cuts . . . coolant is pumped from 2 1/2-gal. reservoir over blade, recirculated and filtered automatically for extended blade life. Quick-action, variable-set vise adjusts for miter cuts of 45° thru 90°. 52 1/2x24x64 1/2 in. high in vertical position, 41 1/2 in. high in horizontal position.

DRIVE, BLADE AND CUTTING CAPACITY: V-belt drive. Sealed worm gear transmission. 4 cutting speeds: 56, 93, 158, 265 fpm. Uses 107x3/4-in. blade. 3 axis, micro-align ball-bearing blade guides keep blade from flexing. Cuts up to 7-in. round stock, 7x12-in. rectangular stock (7x6 in. at 45°). Adjustable hydraulic feed and quick-change tension adjustment with indicator. Saw stops automatically when cut is completed (in horizontal position only).

ACCESSORIES: V-belt, 107x3/4-inch blade with 14 teeth per inch.

ELEC. INFO: 115-volt, 60-Hz. AC. 1265 full-load watts. 4-foot, 3-wire cord.

ORD. INFO: Warranty for saw below; motor, p. 30. Shpg. Note, bottom left.

F9 GT 22967N—Shipping weight 344 pounds . . . \$950.00

7-inch dry-cut Saw. Same as above but without wetting system.

F9 GT 22966N—Shipping weight 329 pounds . . . \$850.00

(3) Wheel Kit for (2). Increases mobility. Unassembled.

F9 GT 22995—Shipping weight 20 pounds . . . \$49.95

Extra Blades for (1). 64 1/2x1 1/2-inch wide. Shpg. wt. each 6 oz.

9 GT 32341—10-tooth blade . . . Each \$3.99, 5 for \$16.99

9 GT 32332—14-tooth blade . . . Each 4.99, 5 for 22.45

9 GT 32342—24-tooth blade . . . Each 3.99, 5 for 16.99

Extra Blades for (2). Extra tough high-speed alloy steel.

107x3/4 inch wide. Shipping weight each 15 ounces.

9 GT 22294—10-tooth blade . . . Each \$14.99, 5 for \$64.99

9 GT 22293—14-tooth blade . . . Each 14.99, 5 for 64.99


14-tooth Blade. For former 9-22963, 9-22962. 107x3/4-in.

9 GT 32333—Wt. each 14 oz. . . . Each \$6.99, 5 for \$29.95

(4 thru 6) Extra Blades. For former 9-2296, 9-22964, 9-2295, 9-22954, 9-2290, 9-22901. Order from chart below.

Teeth	Catalog Number	Shpg. wt. ea.	Price each	5 for
(4) 24 per in.	9 GT 22929	6 oz.	\$5.99	\$24.99
(5) 14 per in.	9 GT 22927	6 oz.	5.99	24.99
(6) 10 per in.	9 GT 22926	6 oz.	5.99	24.99

FULL ONE YEAR WARRANTY ON CRAFTSMAN® STATIONARY POWER TOOLS. If within one year from date of purchase, your Craftsman Band Saw fails due to a defect in material or workmanship, we will repair it free of charge. Warranty service is available by contacting any Sears store throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



V-shaped Riveter \$9.89

(7) V-shaped Riveter For difficult-to-reach areas. Two interchangeable nose pieces for use with rivets below. Plastic storage pouch included.

CONSTRUCTION: Steel. Plastisol grips on handles. Steel nose guide. ORDERING INFORMATION: See warranty on page 30.

Shpg. wt. 1 lb. 5 oz. 9 GT 7474 . . . \$9.89



Heavy-duty Riveter \$14.50

Standard-duty Riveter

(not shown). Includes 30 assorted rivets and 10 back-up plates. Accepts 1/8, 5/32-in. rivets sold below.

CONSTRUCTION: Steel. Plastisol grips on handles. Steel nose guide. ORDERING INFORMATION: See warranty on page 30.

Shpg. wt. 1 lb. 1 oz. 9 GT 7476 . . . \$5.69

(8) Heavy-duty Riveter

CONSTR.: 2 nose pieces for use with rivets sold at left.

ORDER INFO: See warranty on page 30. Shpg. wt. 1 lb. 8 oz. 9 GT 7475 . . . \$14.50

Riveter Kit (not shown).

As above but with 4 boxes of rivets: 50, 3/16x1/4-in. aluminum; 100, 1/8x1/4-in. steel; 100, 1/8x1/4-in. steel; 100, 1/8x1/4-in. aluminum. Instructions, case included.

Shpg. wt. 3 lbs. 9 oz. 9 GT 74752 . . . Kit \$24.50

Back-up Plates (not shown).

Hold 1/8-in. diam. rivets. Box of 50. Shpg. wt. 4 oz. 9 GT 74539 . . . Box 97c

SHIPPING NOTE: "F" items (as F9 GT 22967N) sent from factory in Paris, Tennessee. Pay motor carrier charges from factory. Allow extra delivery time. No C.O.D. orders accepted.

Rivets for riveters above.

Use short rivets for work up to 1/8-in. thick; medium for work 1/8 to 1/4-in. thick; long for 1/4 to 3/8-in. thick.

ORDERING INFORMATION:

Catalog Number	Length	Diam. in.	Box of	Wt. oz.	Per Box	Catalog Number	Length	Diam. in.	Box of	Wt. oz.	Per Box
Aluminum Rivets						White Aluminum Rivets					
9GT74501	Short	1/8	50	3	94c	9GT74511	Short	1/8	50	3	94c
9GT74502	Med.	1/8	40	3	94c						
9GT74503	Med.	5/32	35	4	94c						
9GT74504	Long	5/32	35	4	94c	9GT74507	Short	1/8	60	5	94c
9GT74505	Med.	5/16	25	4	94c	9GT74508	Med.	1/8	50	5	94c
9GT74506	Long	5/16	25	4	94c	9GT74509	Long	1/8	45	5	94c

CRAFTSMAN® Riveters

New at Sears Hydraulic Riveting Tool

Requires 1/2 less operating force than mechanically operated riveters



Riveter plus 2 nose bushings \$39.50

(9) Hydraulic Riveter. Hand operated but hydraulically powered heavy-duty riveter. Operates at any angle. Clamping jaws grip mandrel only once and maintain grip until rivet is popped. No resetting or repositioning required between compression strokes as in mechanical riveters.

CONSTRUCTION: Steel. Plastisol-covered grips. Self-contained hydraulic system refills with 10-wt. motor oil. Disassembles for cleaning.

ACCESSORIES: 2 interchangeable nose bushings permit use of all rivets sold at left.

ORDER INFORMATION: See warranty on page 30. Shipping weight 1 pound 15 ounces. 9 GT 7478 . . . \$39.50

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details




CRAFTSMAN® 18-inch Band/Saw

With four blade speeds... versatile enough to saw intricate curves, then rip through metal 2 inches thick

Band Saw alone
\$1325⁰⁰

Saw with built-in 1-HP motor and magnetic switch

\$1575⁰⁰

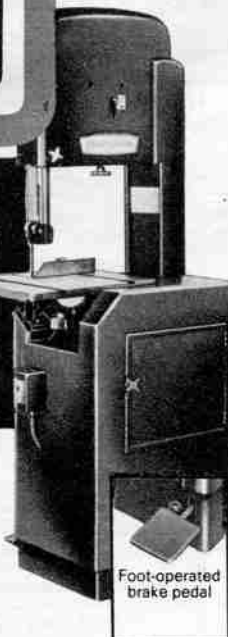

Foot-operated brake pedal

USES: Heavy-duty sawing of metals, wood stock; cuts plywood; bevels, miters. Make compound cuts, rip cuts. Saw big sections of aluminum, brass, iron castings.

DRIVE, MECHANISM: 18-in. drive and idler wheels revolve on pre-lubricated ball bearings. Ball bearing gear reduction allows 4 blade speeds: 118, 167, 221 and 3550 ft. per minute. Incl. 7-in., 4-step machine pulley and 3-in., 4-step motor pulley. Foot operated brake pedal.

WORK TABLE: Cast-iron, measures 20x17 in. Tilts and locks at any angle up to 45° for bevel cuts. Table has two slots for miter gauge (included).

CUT CAPACITY, OVERALL SIZE: Cuts to center of wood stock up to 36 in. wide, 12 in. thick. Depth of throat with shroud 17 in.; without shroud, 18 in. Cuts metals up to 2 in. thick. Overall: 75 in. high, 22½ in. wide, 31 inches deep.

CAPACITOR-START 1-HP MOTOR: 1725 rpm. Permanently lubricated ball bearings. Induction run and fan cooled. Pre-wired to low, no-voltage protective switch... if the power fails or the voltage drops, switch prevents accidental restarts.

HOUSING, CONSTRUCTION: All operating parts enclosed (except cutting portion of blade) in steel cabinet. Blade guard assembly moves up and down, locks in any position. Adjustable belt-blade tension control. Two rubber tires, ball bearing wheels.

ELECTRICAL INFORMATION: 115/230-v., 60-Hz., AC. 1200 full-load input watts. Switch operates on 230-v. only. Manual reset overload protector.

ORDERING INFORMATION: See Warranty on page 16. Motor warranty on page 30. Includes two 11-foot blades: ¼ inch wide for cutting metals; ⅝ inch for cutting wood... order extra blades below. Two pulleys, V-belt and miter gauge.

T9 GT 2361N—Shipping weight 515 lbs. \$1575.00

Band Saw alone. Same as above, but without motor or magnetic switch.

T9 GT 2360N—Shipping weight 415 lbs. \$1325.00

Motor alone. Capacitor start. 1725 rpm. Induction run, ball bearings. Warranty on pg. 30. Wt. 32 lbs.
9 GT 1240C \$97.99

Rip Fence (not shown). For Band Saw sold above. See Shipping Note below. Shpg. wt. 13 lbs.
T9 GT 23586 ... \$42.99

SHIPPING NOTE: "T" items with "N" suffix (as T9 GT 2361N) sent by motor carrier from Chicago, Philadelphia, Atlanta, Dallas or L.A. Customers served by other Distribution Centers allow time. Pay shipping, handling charges from your Distribution Center. C.O.D.'s accepted only for shipment to a Sears Store.


Extra 11-foot Blades for Band Saw alone.

SIZES, USES, ORDERING INFORMATION:

Catalog No.	Width	Teeth	Cut depth	Wt. ea.	Each	5 for
For metal						
9GT27525	¼-in.	18 per in.	0-¼ in.	6 oz.	\$7.99	\$32.95
9GT27526	⅜-in.	14 per in.	¼-½ in.	8 oz.	7.99	32.95
9GT27527	½-in.	10 per in.	½-2 in.	10 oz.	7.99	32.95
For wood						
9GT27151	¼-in.	6 per in.	Use on woods to size limit of band saw	3 oz.	\$6.99	\$29.95
9GT27152	⅜-in.	6 per in.		4 oz.	6.99	29.95
9GT27153	½-in.	6 per in.		6 oz.	6.99	29.95

12¼-inch Metal-turning Lathe

Gives you 16 speeds and 54 feeds

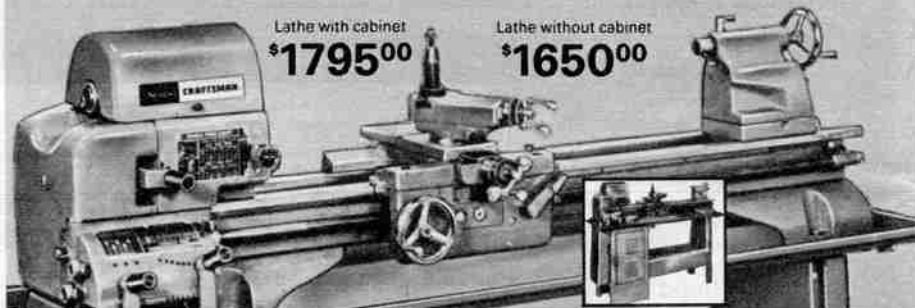

Lathe with cabinet
\$1795⁰⁰

Lathe without cabinet
\$1650⁰⁰

12¼-inch Lathe with Floor-model Cabinet

SPEEDS: 28, 45, 70, 83, 112, 134, 211, 345 rpm in back gear drive; 164, 266, 418, 500, 685, 805, 1270, 2072 rpm in direct drive.

CAPACITY AND CONTROLS: 12¼-inch swing over bed; 12-inch swing over saddle wings; 7¾-inch swing over cross slide; 36-inches between centers. Carriage has reversible power cross, longitudinal feeds; 6½-inch cross, slide travel; ½-inch diameter feed screw with 8 Acme threads per in.; 2¼-inch compound rest travel; ¾x⅝-inch slot in tool post takes ¾-inch bits or holder for ¼-inch bits. Headstock has 2½-inch spindle bore; ¾-inch lead screw; ½-inch collet capacity; 1½-inch spindle nose with 8 threads; No. 3 Morse taper with No. 2 reducing sleeve. Tailstock with 1½-inch diameter spindle bored for No. 2 Morse taper; 2¾ inch spindle travel; ¾-inch tailstock setover. 54 feeds from .0042 to .250 inch. Cuts 4 to 240 Standard threads per inch, right or left hand. Micrometer graduated feed-screw collars. Base of compound rest swivels 180°. Sixty-hole indexing mechanism. 12 pitch back gears at 6 to 1 ratio, oil-impregnated bearings. Horizontal countershaft drive.

CONSTRUCTION: Semi-steel bed cast in 1 pc.; bed ways align to 1/1000 of an in. Timken tapered roller bearings absorb both radial and thrust loads. 4-step machine pulley, 2-step motor pulley. Overall: measures 63x27x20 in. high.

ACCESSORIES: Incl. V-belt, two 60° centers, tool post, reducing sleeve for headstock centers, wrenches, set-up and operating instructions.


CABINET: Floor-model cabinet stand of heavy-gauge steel. 62½ in. long, has rigid pedestal of ¾-in. plate steel. Built-in chip pan with drain outlet. Underneath drive. Column encloses motor and countershaft (motor not incl.). Both countershaft and belt handles extend outside of cabinet. Overall dimensions: 63x19x48 inches high.

ORDERING INFORMATION: Chuck, bit and motor not included. Use at least ½-HP, ⅝-in. shaft, 1725 rpm motor. See motors on page 30-31. Also see Warranty on page 16.

Shipping weight 505 pounds.
9 GT 2899N \$1795.00

Lathe above without floor-model Cabinet

ORDERING INFORMATION:
9 GT 2891N—Shpg. wt. 348 lbs. \$1650.00

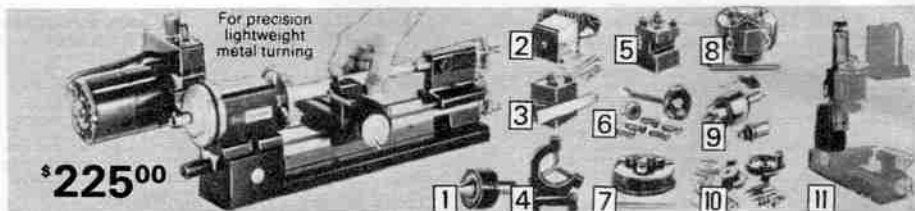

\$225⁰⁰

CRAFTSMAN Precision 3-inch Lathe

Use for lightweight precision metal work. For use in workshops and model-making. With proper accessories (1 thru 11) sold at right you can cut threads, do mill work, end boring.

SPEEDS: Variable speed control. Adjust belt drive system speeds from 100 to 2000 rpm. ½-HP motor.

CAPACITY, CONTROLS: 8 in. between centers, 3½ in. swing over bed. 1¾ in. swing over cross-slide. Manual cross feed carriage and longitudinal feeds. Calibrated headstock swivels for taper turning... removes for use with milling attachment (11), right. Spindle nose has ¾x16 thread and a Morse No. 1 internal taper. Travel of crossslide 2¼ in. Travel of tailstock 1½ in. Handwheels are graduated in .001 increments.

CONSTRUCTION: Solid nickel/brass alloy bed with fully dovetailed slides with adjustable gibs for accurate saddle movement along bed. Headstock has permanently lubed adjustable ball bearing with a 1½ inch spindle bore. Overall: 18x7½x6 in. high.

ACCESS: Incl. V-belt, faceplate and carrier, two dead centers, two hexagon keys, tool post and one ¼-in. tool bit, complete operating instructions.

ELEC. INFO: 110-115-v., 60 Hz., AC. 8-ft., 3-wire cord. 300 w.
ORDER INFO: See accessories sold for this lathe at right. See Warranty, p. 16. Wear safety goggles... see p. 57. Also see 6-pc. Formed Tool Bit Set (16), p. 43. Wt. 20 lbs.
9 GT 2142C \$225.00

Accessories for 3-inch Lathe

(1) Live Center. Holds work for fast spinning.

ORDERING INFO:
Shipping weight 8 oz.
9 GT 21428 \$12.95

(2) Power Feed

Separate gear motor drives lead screw. Feeds at approximately 1-inch per minute right to left.
ORDERING INFO:
Shpg. wt. 4 lbs. 7 oz.
9 GT 21429 \$39.95

(3) Cut-off Tool, Holder

ORDERING INFO:
Shipping weight 10 oz.
9 GT 21425 \$19.95

(4) Steady Rest

ORDERING INFO:
Shipping weight 15 oz.
9 GT 21426 \$12.95

(5) Two position Tool Post

Holds bits for turning.
ORDER INFO: Wt. 7 oz.
9 GT 21427 \$6.95

(6) Collets

Set of 5. Standard w.w. collets used by watchmakers. 1/16, 1/8, 3/16, 1/4, 3/8-in. sizes. Includes drawbar, collet adaptor.
ORDERING INFO:
Shpg. wt. 1 lb. 5 oz.
9 GT 21432 ..Set \$49.95

(7) 3-Jaw Self-centering Chuck

Reversible jaws hold work to 2¼ inch diam.
ORDER INFO: Wt. 1 lb.
9 GT 21422 \$49.95

(8) 4-Jaw Chuck

Reversible, independent jaws. 2¾ inch capacity.
ORDERING INFO:
Shpg. wt. 1 lb. 3 oz.
9 GT 21423 \$49.95

(9) Tailstock Chuck

0 to ¼ in. Jacobs chuck, Nos. 0 and 1. Morse arbor to adapt to spindle. Key.
ORDER INFO: Wt. 10 oz.
9 GT 21421 \$12.95

(10) Screw Cutting Attachment. Cut American, Metric thread, left and right-hand leads. Internal, external threads. Instr.

ORDER INFO: Unassembled. Wt. 2 lbs. 7 oz.
9 GT 21431 \$89.95


(11) Vertical Milling Column

Solid aluminum base and dovetailed column. Fits on lathe where headstock was attached; attach headstock to column. Cut grooves, keyways, flycutting.
ORDERING INFO:
Shipping wt. 7 lbs. 2 oz.
9 GT 21424 \$59.95

Our new CRAFTSMAN® 8-inch Metal-turning Lathe

Handles the same heavy-duty tasks as our other precision lathes yet it requires much less workspace

• 6 speeds, 2 feeds • Needs only 37x20 inch space to operate

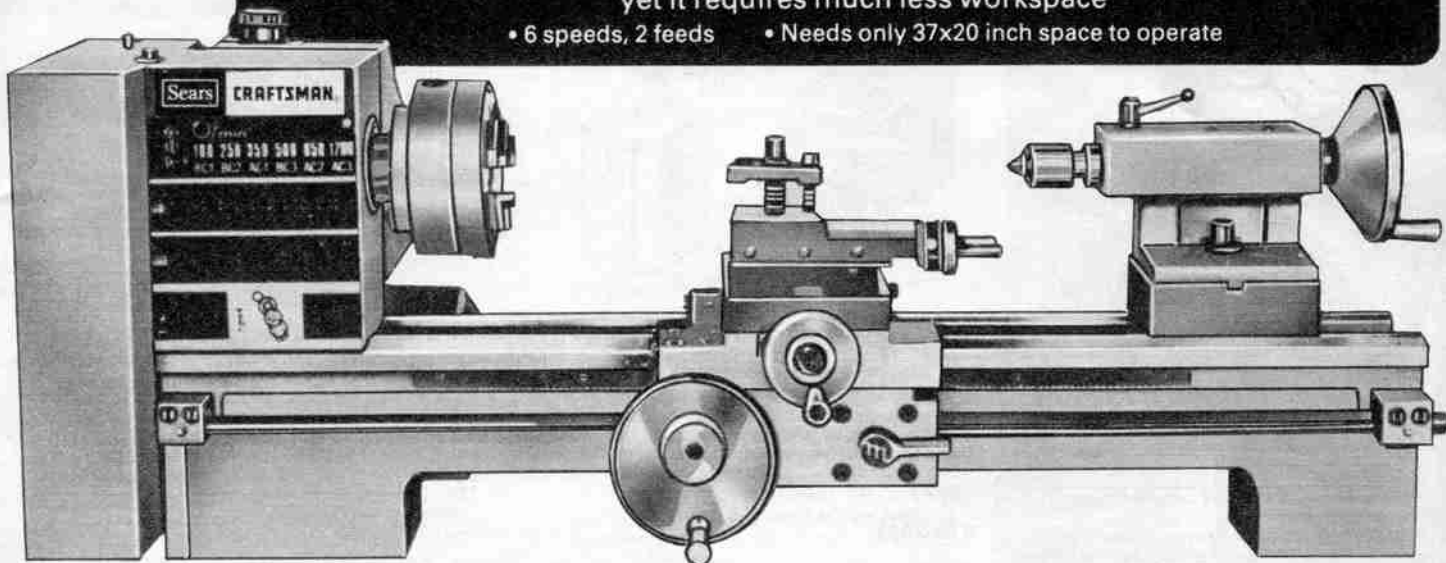

8-inch
Metal-turning Lathe

\$1295⁰⁰

Note: For more information on CRAFTSMAN Bench Power Tools and Accessories send for FREE BOOKLET 39 GT 7499

CAPACITY. CONTROLS: 8.2-inch swing over bed; 8-inch swing over saddle wings; 4½-inch swing over cross slide; 17½ inches between centers. Carriage has reversible longitudinal feeds; 4-inch cross-slide travel; .59-inch diameter feed screw with 17 threads per inch; 2-inch compound rest travel; tool post takes ⅜-inch bits or 4-way toolpost for ⅜-inch bits (see toolpost holder (8) sold below). Headstock has .8-inch spindle bore; also has ⅜-inch collet capacity; short taper spindle nose with No. 3 Morse taper. Tailstock with 1-inch diameter spindle bored for No. 2 Morse taper; 1½-inch spindle travel; spindle graduated in ⅛-in. from 0 to 1.5 in.; .51-.32-inch tailstock setover for taper turning. Two feeds from 0.0035 to 0.007. Cuts 10 to 44 Standard threads per in. right or left hand. Handwheels with adjustable scale rings. Micrometer graduated feed-screw collars with locks for quick dialing. Base of compound rest swivels 180° . . . locks in any position. Oil-impregnated bearings. Horizontal countershaft drive. Lever release for quick speed changes.

SPEEDS: 100, 250, 350, 500, 850, 1700 rpm.

MOTOR: 1375-rpm, ½-HP. ⅜-inch shaft. Permanently lubricated ball bearings.


CONSTRUCTION: Semi-steel bed cast in one piece. Roller bearings help absorb radial and thrust loads . . . also help keep friction at a minimum for long and accurate service. Three-step machine pulley; one-step motor pulley with toothed belt drive. Overall dimensions: 34½x13½x12½ inches high.

ACCESSORIES: Lathe includes toothed belts, service tools, grease gun, set-up and operating instructions, driving pin, lathe dog, two centers (MT2 and MT3), universal quadrant with six change gears.

ORDERING INFORMATION: Lathe is imported. See Full One Year Warranty on page 16. Also be sure to see all the accessories shown below, on this page. Protect your eyes . . . see safety goggles and equipment sold on page 57.

9 GT 2892N—Shipping weight 152 pounds . . . \$1295.00

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

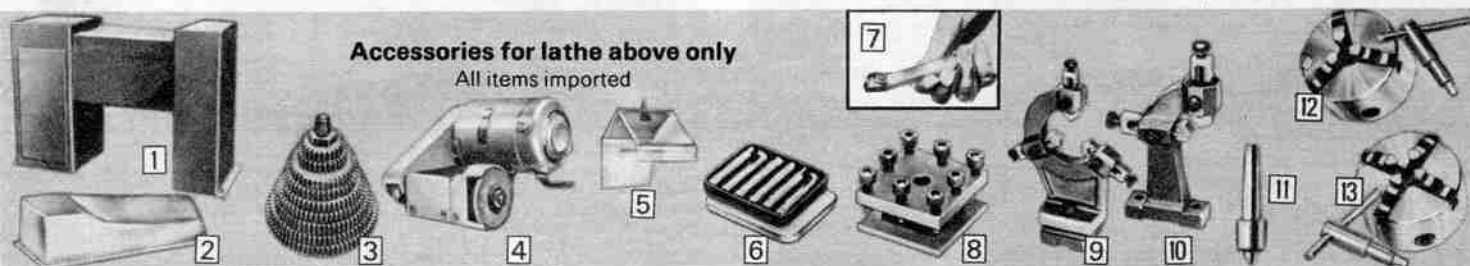

Accessories for lathe above only

All items imported

(1) Cabinet
CONSTRUCTION: Floor model cabinet base made of heavy-gauge steel. Removable chip tray. Cabinet storage area locks for security purposes, key included. Overall: 40x17x32 in. high.
ORDER INFO: For lathe above only. Shpg. wt. 135 lbs.
9 GT 21452N . . . \$299.95

(2) Cover for lathe
Fits snugly over lathe for added protection and storage purposes.
CONSTRUCTION: Made of polyvinyl. Cover measures 34½x13½x12½ inches high.
ORDERING INFORMATION: For lathe above only. Shpg. wt. 9 oz.
9 GT 21441 . . . \$14.99

(3) Change Gear Set
Includes eight gears and one intermediate bushing. Steel construction.
ORDER INFORMATION: For lathe above only. Shpg. wt. 1 lb. 14 oz.
9 GT 21435 . . . \$59.95

(4) Tool Post Grinder. Mounts easily on tool slide of compound rest of lathe above. Three speeds; 4500, 8000 and 12,000 rpm, for efficient grinding in soft or hard metals. Heavy-duty spindle.
CONSTRUCTION: Heavy-duty steel. 7,000-rpm motor develops maximum ⅓-HP. 2½-in. external grinding wheel (grind up to 4½-in. external diameters; from 0.4 to 2½-in. internal diameters.) Includes quill for internal work.
ELECTRICAL INFO: 115-volts, 60-Hertz. AC. 150 watts. Four-foot, 3-wire cord.
ORDERING INFORMATION: For use with lathe above only. See chip guard (5) below. Shipping weight 13 lbs. 4 oz.
9 GT 21439 . . . \$349.95

(5) Chip guard. Attaches to grinder (9 GT 21439) above. Helps prevent chips from flying into work area. Lexan® shatter-proof plastic.
ORDERING INFORMATION: For lathe above only. Shipping weight 1 lb. 1 oz.
9 GT 21438 . . . \$44.95

(6) Six Turning Tools. Includes two left hand, facing internal and external, threading and cut-off. High-speed steel. For lathe above. Shipping weight 10 oz.
9 GT 21444 . . . Set \$79.99

Turning Tool (not shown). ⅜-in. square section. High-speed steel. Unground (can be ground to any angle). For lathe above.
9 GT 21447—Wt. 2 oz. . . \$8.99

(7) Toolholders for carbide tips. Steel construction.
TYPES. ORDER INFORMATION: Facing Toolholder. Takes left hand insert.
9 GT 21445—Wt. 3 oz. . \$34.99
Roughing Toolholder. Takes right hand insert.
9 GT 21446—Wt. 3 oz. . \$34.99
Turning Toolholder. Takes right hand insert.
9 GT 21443—Wt. 3 oz. . \$34.99

Carbide Inserts. For (7) above.
Left-hand Insert. Set of 10. Shipping weight 2 ounces.
9 GT 21448 . . . Set \$21.99
Right-hand Insert. Set of 10. Shipping weight 2 ounces.
9 GT 21449 . . . Set \$21.99

(8) Four-way Tool Holder
Holds turning tools up to ⅜ inch in diameter. Steel.
ORDERING INFORMATION: Shpg. wt. 1 lb. 2 oz.
9 GT 21442 . . . \$39.99

(9) Steady Rest
Clamps to bed ways.
CONSTRUCTION: Bronze jaws, hinged type. For diameters 0.12 to 2.17 in.
ORDERING INFORMATION: For lathe above only. Shipping weight 4 lbs.
9 GT 21436 . . . \$64.95

(10) Follower Rest
Mounts back of carriage dovetail slide. For work on long, slender rods.
CONSTRUCTION: Bronze jaws, steel body. For diameters 0.12 to 2.17 inches.
ORDERING INFORMATION: For lathe above only. Shpg. wt. 1 lb. 8 oz.
9 GT 21437 . . . \$49.95

(11) Live Center. MT 2. For metal turning. Steel.
ORDERING INFO: Shipping weight 9 oz.
9 GT 21451 . . . \$34.95


(12 and 13) Universal Lathe Chucks

Heavy-duty, self-centering type. Jaws controlled by single screw and pinion gear. All steel body. Alloy metal scroll, alloy steel pinion. Alloy steel jaws with raised steps heat-treated and hardened. Inside, outside gripping jaws. T-handle chuck wrench.

SIZES. ORDERING INFO: For lathe above only.

(12) 2x3-inch jaws. Wt. 7 lbs. 15 oz.
9 GT 21433 . . . \$199.95

(13) 2x4-inch jaws. Wt. 8 lbs. 4 oz.
9 GT 21434 . . . \$199.95



Universal Tool Post Grinder
\$439.95

Enables 12 1/4-inch metal lathes to grind tools, dies, bearings, shafts, valves




Unit mounts on tool slide of lathe compound rest for precision work.

MOTOR: Two-speed 3450-rpm motor develops maximum 1/4 HP. Belt-drive gives 4900 and 9100 rpm for grinding in soft or hard metals.

COMPONENTS: Includes belt, 4-inch external and 1/2-inch internal grinding wheels (grind up to 4 1/4-inch external diameter; from 1/4 to 9 1/4-inch internal diameter). With diamond wheel dresser and quill for internal work.

ELECTRICAL INFORMATION: 110-120-volt, 60-Hertz AC. 150 maximum idle watts.

ORDERING INFORMATION:
9 GT 2998C—Shpg. wt. 37 lbs. \$439.95



Reversing Switches, Taper Attachment, Tool Rests for metal lathes

(1) Reversing Switch for motors up to 1 HP

FUNCTION: Gives you the control to stop, reverse split-phase and capacitor motors up to 1 HP. Gives added control for precision operations like threading. Use on any 12 1/4-in. metal-turning lathe with proper wiring. For up to 550-volt, AC. Installation diagram.

ORDERING INFORMATION:

Shipping weight 1 pound 6 ounces.
9 GT 2982 \$38.95

(2) Reversing Switch for motors up to 1 1/2 HP

FUNCTION: Lets you quickly stop, start and reverse lathe for added control over threading and other jobs. Specifically designed to fit CRAFTSMAN 6 and 12 1/4-inch lathes. Use with AC single and 3-phase motors developing a maximum of 1 1/2 HP. For up to 550-volt, AC. 2-wire, 8-foot cord. Includes installation diagram.

ORDERING INFORMATION:

Shipping weight 4 pounds 1 ounce.
9 GT 2018 \$79.95

(3) CRAFTSMAN® Taper Attachment

FUNCTION: Cuts duplicate tapers on pieces of different lengths. For internal boring, external work. Index plate graduated 7°, 3 inches both sides of center line. Travel is 6 inches.

ORDERING INFORMATION: Designed for use with 12 1/4-inch CRAFTSMAN lathe only.

Shipping weight 10 lbs. 9 oz.
9 GT 29845 \$139.95


(4) Two-piece Toolrest Set

FUNCTION: Allows precision operations in wood, copper, brass, aluminum and plastic, using handheld tools. Rugged cast-iron construction. Mounts quickly in compound rest of metal lathes.

SIZES, ORDERING INFORMATION:

For 12 1/4-inch metal lathes. 4 and 12-in. wide sizes.
9 GT 2045—Shpg. wt. 2 lbs. 8 oz. Set \$29.95

For 6-inch metal lathes. 4 and 8-in. wide sizes.
9 GT 2044—Shpg. wt. 1 lb. 6 oz. Set \$21.95

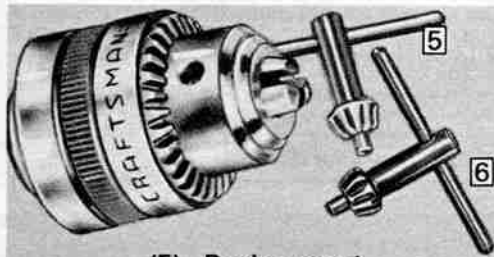

(5) Replacement Electric Drill Chucks

Low as **\$5.89** each

Three-jaw keyed chuck for Sears and other electric drills. Key included. Heavy-duty steel.

THREAD SIZES, CAPACITY, ORDERING INFO:

Catalog Number	Fit Threads	Capacity	Shipping weight	Each
9 GT 2975	3/8-in. x 24	1/16 to 3/8 in.	15 oz.	\$5.89
9 GT 2980	1/2-in. x 20	3/64 to 1/2 in.	1 lb.	7.89

(6) Chuck Keys for electric drills

Low as **77c** each

Fits geared chucks on Jacobs, Supreme or Sears electric drills listed below. Heavy-duty steel.

TYPE, ORDERING INFORMATION:


Catalog Number	Fits Jacobs Chuck	Fits Supreme Chuck	Fits Sears Chuck	Shpg. wt.	Each
9GT2051	1, 1A, 1BS	1A, 1T1	9-2972	4 oz.	97c
9GT2073	7, 7B, 7-1A	H17A, 4A, 4B, 4C, 4T1, 4T2	9-2979 9-2976	7 oz.	\$1.57
9GT2058	MC1, MC2, U4G	B1A, B80A, BM1A, S80A	9-2975 9-29721	4 oz.	77c
9GT2059	MC4K61	B13A, B14T33, B14B, B16B, B16A, B16T33	9-2973 9-2980	4 oz.	97c

Lathe Handbook

CONTENTS: Hints on lathe care, operations, and attachments. 258 pages. With machinist's tables, photos, diagrams and index tabs. Paperbound.

ORDERING INFORMATION:

Shipping weight 1 pound 4 ounces.
9 GT 2925 \$8.95

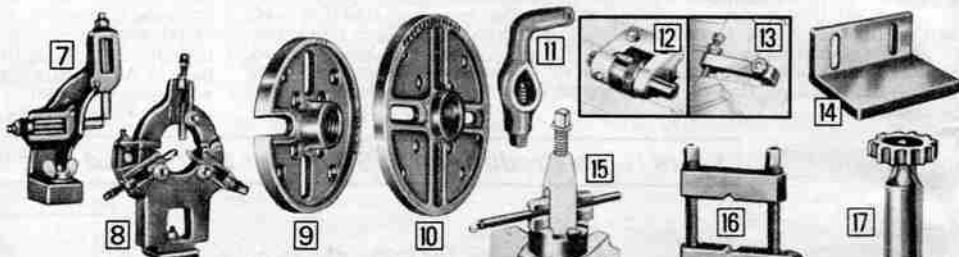

Accessories for metal lathes

(7) Follower Rest. Mounts to rear of carriage dovetail slide. For work on long slender rods.

ORDERING INFORMATION:

For 6-inch metal lathes.
9 GT 2042—Shpg. wt. 3 lbs. 2 oz. \$28.95

For CRAFTSMAN 12 1/4-inch metal lathe.
9 GT 2988—Shpg. wt. 3 lbs. 4 oz. \$29.95

(8) Steady Rest.

Clamps to bed ways. Bronze jaws.

TYPE, ORDERING INFORMATION:

For 6-inch metal lathes. For diameter to 2 3/8 in.
9 GT 2041—Shpg. wt. 3 lbs. 2 oz. \$29.95

For CRAFTSMAN 12 1/4-in. metal lathes. Hinged type. For diameters to 2 7/8 inches.
9 GT 20507—Shpg. wt. 9 lbs. 4 oz. \$79.95

(9 and 10) Face Plates. Use for work which cannot be machined on the center or in the chuck. Fit on headstock spindle. Machine gray-iron casting; slots clamp work or drive lathe dog.

(9) For 6-inch metal lathes. For 1-inch, 10 thread spindle. 5 1/4-in. diameter with 4 slots.

ORDERING INFORMATION:

9 GT 21405—Shpg. wt. 1 lb. 14 oz. \$17.95

(10) For 12 1/4-inch metal lathes. For 1 1/2-in., 8 thread spindle. 8 1/2-inch diameter with 8 slots.

ORDERING INFORMATION:

9 GT 24755—Shipping weight 7 lbs. \$34.95

(11) Lathe Dogs. Forged steel. For (9) or (10). SIZE. **ORDERING INFORMATION:**

9 GT 21831—1 1/2-in. Shpg. wt. 8 oz. \$5.95

9 GT 21832—3/4-in. Shpg. wt. 10 oz. 6.95

9 GT 21833—1-in. Shpg. wt. 12 oz. 7.95

9 GT 21834—1 1/2-in. Shpg. wt. 14 oz. 9.95

(12) Carriage Stop. Clamps to bed way of 6-inch or 12 1/4-inch metal lathes.

ORDERING INFORMATION:

9 GT 2185—Shipping weight 1 lb. 4 oz. \$29.95

(13) Cross Slide Stop. Fits 12 1/4-in. metal lathes. Shows depth at which to stop cross feed. Not intended to stop cross feed automatically. To install, clamp cross slide stop to dovetail.

ORDERING INFORMATION:

9 GT 1510—Shipping weight 8 oz. \$24.95

(14) Angle Plate. For 12 1/4 and 10-in. metal lathes. Simplifies off-center work and machining of odd-shaped pieces. Bolt to face plate. Horizontal face, 6x4 3/4x3 3/4 in. Vertical face, 6x2 3/8x3 3/4 in.

ORDERING INFORMATION:

9 GT 1509—Shipping weight 10 lbs. \$49.95

(15) Boring Tool Holder.

Includes clamp ring, V-block, plain block and 1/4-inch high-speed boring tool. Slots hold boring tools of 3/16, 1/4, 5/16, 3/8-inch diameters.

ORDERING INFORMATION:

For 6-inch metal lathes.
9 GT 1515—Shipping weight 1 lb. \$18.95

For 12 1/4-inch metal lathes. Clamp ring has 1 3/4-in. outside diameter, 1 1/4-in. inside diameter.
9 GT 1511—Shipping weight 1 lb. \$19.95

(16) Clamp-type Dog.

For 12 1/4, 6-inch metal lathes. Handles square, round, rectangular and hexagonal work. Clamp bars machined, hardened—screws heat treated for long wear. Jaws open to 2 inches.

ORDERING INFORMATION:

9 GT 1512—Shipping weight 1 lb. \$29.95

(17) Woodruff Keyway Cutters. 1/2-inch shank. For 12 1/4 and 6-inch metal lathes.

ORDERING INFORMATION: Shpg. wt. 8 oz.

Catalog Number	Diameter	Thickness	Each
9 GT 29961	1/2 inch	1/8 inch	\$13.95
9 GT 29962	3/4 inch	3/16 inch	15.95
9 GT 29963	1 inch	1/4 inch	18.95
9 GT 29964	1 1/8 inch	3/8 inch	21.95
9 GT 29965	1 1/4 inch	3/8 inch	24.95



and metal lathes

and for METAL LATHES sold on pages 40-41

Milling Accessories for Lathes

(1) **Milling Attachment.** Graduated swivel vise, flat block. For face-milling, cutting keyways, etc. Use with 6 or 12 1/4-inch lathes.

For CRAFTSMAN 6-in. Lathes. Vise capacity 2 in. Vertical feed 1 1/4 in. Cross feed 3 3/8 in.

ORDERING INFORMATION:

9 GT 2057—Shipping weight 8 lbs. 6 oz. ... \$99.95

For CRAFTSMAN 12 1/4-inch Lathes. Vise capacity 2 3/4 inches. Vertical feed 3 3/4 inches. Cross feed 5 inches.

ORDERING INFORMATION:

9 GT 2987C—Shipping weight 17 lbs. ... \$139.95

(2) **Milling Cutter Holder.** With 1/2-in. arbor. ORDERING INFORMATION:

For 6-inch lathes 9-2120, 9-2140 only.

9 GT 21408—Shipping weight 1 lb. 5 oz. ... \$29.95

For 12 1/4-inch lathes.

9 GT 29945—Shipping weight 2 lbs. 2 oz. ... \$39.95

Set of Bushings (not shown). Adapts either holder above to these end mill sizes: 1/4, 5/16, 3/8, 7/16 inch.

ORDERING INFORMATION:

9 GT 2985—Shpg. wt. 8 oz. ... Set \$14.95

(3) **Arbor.** Enables cutter holder (2) to take angular cutter (4).

ORDERING INFORMATION:

For 3/8-inch x 24-thread cutter.

9 GT 1566—Shpg. wt. 3 oz. ... \$11.95

For 1/2-inch x 20-thread cutter.

9 GT 1567—Shpg. wt. 3 oz. ... \$11.95

(4) **Angular Cutter.** Face mill, dovetail, cut angles less than 90°. Included angle of 60°.

SIZES. ORDERING INFORMATION:

7/16 inch thick, 1 1/2-inch diameter with 3/8-inch x 24 thread hole. Use with arbor 9 GT 1566 to fit holders (2).

9 GT 29951—Shipping weight 8 oz. ... \$36.95

3/16-inch thick, 1 5/8-inch diameter with 1/2-inch by 20 thread hole. Use with arbor 9 GT 1567 to fit holder (2).

9 GT 29952—Shipping weight 8 oz. ... \$39.95

(5) **Right hand Spiral End Mill** For slots. Held in milling holder 9 GT 29945 or 9 GT 21408, with bushing 9 GT 2985.

SIZES. ORDERING INFORMATION: Wt. 8 oz.

Catalog Number Diameter Length flute Each

9 GT 29971 1/4 in. 3/8 in. \$10.95

9 GT 29972 5/16 in. 11/16 in. 11.95

9 GT 29973 3/8 in. 3/4 in. 12.95

9 GT 29974 7/16 in. 7/8 in. 13.95

9 GT 29975 1/2 in. 1 1/16 in. 14.95

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

CRAFTSMAN® Lathe Chucks

(6) **Independent 4-jaw Chuck.** Chuck body semi-steel cast with deep jaw slots for strength and bearing surface. All four reversible jaws work independently, so they're ideal for holding irregularly shaped pieces. Large jaw screw and T-handle wrench. Imported.

SIZES AND ORDERING INFORMATION:

Catalog No.	Will fit spindle	Diam.	Shpg. wt.	Each
9 GT 2155	3/4-in. by 16-thread	4 in.	4 lbs.	\$79.95
9 GT 2159	1-in. by 10-thread	4 in.	3 lbs. 14 oz.	79.95
9 GT 2150	1 1/2-in. by 8-thread	6 in.	10 lbs.	144.95
9 GT 21581	1 1/2-in. by 8-thread	8 in.	14 lbs.	149.95

(7) **Universal 3-jaw Lathe Chuck.** Heavy-duty self-centering type. Jaws controlled by single screw and pinion gear... ideal for centering work. Body casting of semi-steel. Alloy metal scroll, alloy steel pinion. Alloy steel jaws with raised steps heat-treated and hardened. Inside, outside gripping jaws. T-handle chuck wrench. Imported.

SIZES AND ORDERING INFORMATION:

Cat. No.	Will fit spindle	Diam.	Shpg. wt.	Each
9 GT 21407	1-in. by 10-thread	4 in.	5 lbs. 8 oz.	\$139.95
9 GT 2165	1 1/2-in. by 8-thread	5 in.	9 lbs.	164.95
9 GT 2168	1 1/2-in. by 8-thread	6 in.	12 lbs. 2 oz.	199.95

(8 thru 13) **Lathe Tool Holders.** Forged steel, without bit.

SIZES AND ORDERING INFORMATION:

SIZES AND ORDERING INFORMATION:					
Type	Catalog Number	Bit size	Fits Metal Lathe	Wt. oz.	Each
(8) Straight	9 GT 2033	3/16-in.	Craftsman 6-in. lathe	8	\$12.49
(8) Straight	9 GT 2196	1/4-in.	Craftsman 12 1/4-in. lathe	10	14.49
(9) Left hand	9 GT 2035	3/16-in.	Craftsman 6-in. lathe	8	10.99
(9) Left hand offset	9 GT 2194	1/4-in.	Craftsman 12 1/4-in. lathe	10	9.99
(10) Right hand	9 GT 2034	3/16-in.	Craftsman 6-in. lathe	8	9.99
(10) Right hand offset	9 GT 2192	1/4-in.	Craftsman 12 1/4-in. lathe	10	9.99
(11) Knurling	9 GT 2036		Craftsman 6-in. lathe	10	29.99
(11) Knurling	9 GT 2202		Craftsman 12 1/4-in. lathe	13	24.99
(12) Threading	9 GT 2031		Craftsman 6-in. lathe	10	19.99
(12) Threading	9 GT 2198		Craftsman 12 1/4-in. lathe	12	19.99
(13) Cutoff	9 GT 2037		Craftsman 6-in. lathe	10	19.99
(13) Cutoff	9 GT 2200		Craftsman 12 1/4-in. lathe	12	17.99

Replacement Blades (not shown). For (13) above.

ORDERING INFORMATION:

9 GT 2009—For (9 GT 2037). Shipping weight 2 ounces ... \$5.79

9 GT 2238—For (9 GT 2200). Shipping weight 4 ounces ... 5.29

(14) **Tool Post Set.** 4 boring bars; internal, external threading; external turning tool; spacer, V-block.

ORDERING INFORMATION:

For 6-inch metal lathe

9 GT 2038—Shipping weight 1 pound ... Set \$39.95

For 12 1/4-inch metal lathe

9 GT 2189—Shipping weight 2 pounds 2 ounces ... Set 44.95

(15) **Boring Tool Set.** For 6-inch metal lathes. Includes 1/4, 3/16-inch boring, and 1/4-inch threading tools, also includes V-block.

9 GT 2008—Shipping weight 4 ounces ... Set \$19.95

(16) **6-piece Formed Tool Bit Set.** Threading bit; left-hand and right-hand facing bits; left-hand, right-hand round-nose turning bits. Made of high-speed steel.

SIZES. ORDERING INFORMATION:

1/4-inch size for 3-inch and 12 1/4-inch lathes

9 GT 2016—Shipping weight 4 ounces ... Set \$9.95

3/16-inch size for 6-inch lathes

9 GT 2017—Shipping weight 3 ounces ... Set 8.95

Work Arbors and Chucks for lathes, electric motors

(25) **Work Arbor with Chuck.** 3-jaw screw-on type.

1/2-in. cap.; 1/2-in. x 20-thread.

TAPER SIZE, ORDER INFO:

No. 1 Morse taper.

9 GT 22344—Wt. 1 lb. 8 oz. \$5.99

No. 2 Morse taper.

9 GT 22472—Wt. 1 lb. 11 oz. 5.99

(26) **Work Arbor.** Use with motor for buffing, polishing, wire brushing. Carbon steel arbor, steel flanges. 3 3/4 inches long, 2 3/8-inch spindle, 1/2-inch x 20-inch thread.

SIZE, ORDER INFO: Wt. 14 oz.

9 GT 21643—1/2-in. bore ... \$2.75

9 GT 21644—3/8-in. bore ... 2.75

(27) **Work Arbor.** 2 steel flanges, clamping nut, 1/2-inch x 20 thread.

TAPER, ORDER INFO:

No. 1 Morse taper.

9 GT 21534—Wt. 11 oz. \$3.69

No. 2 Morse taper.

9 GT 21522—Wt. 13 oz. 3.69

(28) **CRAFTSMAN Keyless Chuck.** 3-jaw, screw-on, knurled. For 1/2-inch x 20 thread spindle.

CAPACITY, ORDER INFO:

1/4-inch capacity.


9 GT 22482—Wt. 7 oz. \$1.99

1/2-inch capacity.

9 GT 22562—Wt. 13 oz. 2.99

COMPSK SLAEGJD

Sears 43

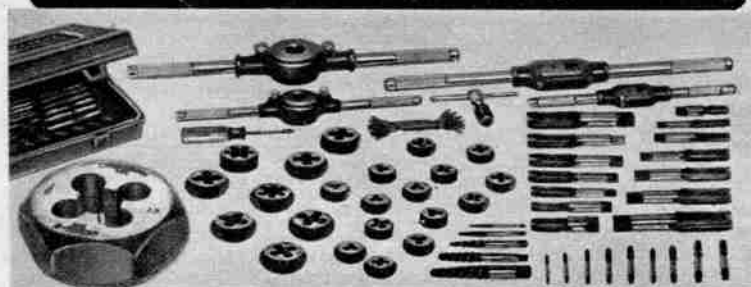

CRAFTSMAN® Tap and Die Sets of high-speed steel

Heat-treated, high-speed steel wears better, stays sharper longer than carbon steel. Excellent for auto and machinery repairs... even home repairs

59-pc. Standard or Metric Sets


CONSTRUCTION: High-speed steel. Black-oxide coating reduces friction, gives smooth cutting action. Taps and dies are "cut-thread" tolerance, produce Class II fit threads as specified by the National Bureau of Standards United States Department of Commerce.

SET COMPONENTS: 23 taps, 23 hex dies (13 one-inch diameter, eight 1 1/16-inch diameter, 2 pipe taps and dies), 2 adjustable guide die stocks, "T" handle tap wrench, 5 screw extractors, 2 tap reamer wrenches, screwdriver, thread gauge, plastic case, instructions.

ORDERING INFORMATION: See Full Unlimited Warranty for CRAFTSMAN® Hand Tools, pg. 112. See chart below for sizes.

Standard Set
Shipping weight 13 lbs. 12 oz.
9 GT 52311Set \$229.00

Metric Set
Shipping weight 13 lbs. 12 oz.
9 GT 52001Set \$229.00



STANDARD Thread Types and Sizes

Type of Cut	Thread Sizes	76-piece Set 52131	66-piece Set 52161	59-piece Set 52311 52151	41-piece Set 5209 5201	28-piece Set 5200	22-piece Set 52121
Cuts National Coarse (USS) threads	1/4-20	X	X	X	X	X	X
	5/16-18	X	X	X	X	X	
	3/8-16	X	X	X	X	X	
	1/2-14	X	X	X	X	X	
	5/8-12	X	X	X	X	X	
	3/4-10	X	X	X	X	X	
	7/8-9	X	X	X	X	X	
	1-8	X	X	X	X	X	
	1 1/8-7	X	X	X	X	X	
	1 1/4-6	X	X	X	X	X	
Cuts National Fine threads	1/4-28	X	X	X	X	X	X
	5/16-24	X	X	X	X	X	
	3/8-24	X	X	X	X	X	
	1/2-20	X	X	X	X	X	
	5/8-18	X	X	X	X	X	
	3/4-16	X	X	X	X	X	
	1-12	X	X	X	X	X	
Cuts machine screw threads	4-40	X	X	X	X	X	X
	6-32	X	X	X	X	X	
	8-32	X	X	X	X	X	
	10-24	X	X	X	X	X	
	10-32	X	X	X	X	X	
	12-24	X	X	X	X	X	
NPT Pipe thread	1/8-27	X	X	X	X	X	
	1/4-28	X	X	X	X	X	

Kromedge® Sets made of Carbon Steel

CONSTRUCTION: Tempered carbon steel. Chrome-plated for smooth cutting action. Hex-shaped dies let you use sockets, open-end and adjustable wrenches.

76-piece Standard and Metric Set

SET COMPONENTS: 34 taps and 34 hex dies in standard and metric sizes. (32 one-inch dies, 2 pipe taps and dies), adjustable guide die stock, 2 "T" handle tap wrenches, tap reamer wrench, screwdriver, thread gauge, case, instructions.

ORDERING INFORMATION: See Warranty, pg. 112. See chart below for Standard and Metric thread types, sizes.
Shipping wt. 8 lbs. 8 oz.
9 GT 52131Set \$89.99

New at Sears... 66-piece Standard Set

SET COMPONENTS: 28 taps and 28 hex dies, 3 adjustable guide die stocks, "T" handle tap wrench, 3 tap reamer wrenches, screwdriver, thread gauge, case, instructions.

ORDERING INFORMATION: See Warranty on page 112. See chart below for Standard thread types, sizes.
Shipping wt. 13 lbs.
9 GT 52161Set \$149.99

59-pc. Standard or Metric Sets

SET COMPONENTS: 23 taps, 23 hex dies (13 one-in. and eight 1 1/16-in. diam. 2 pipe taps, dies), 2 adj. guide die stocks, "T" handle tap wrench, 5 screw extractors, 2 tap reamer wrenches, screwdriver, thread gauge, case, instr.

ORDER INFO: Warranty, p. 112. See chart below for sizes.
Standard—Wt. 13 lbs. 12 oz.
9 GT 52151Set \$99.49
Metric—Wt. 13 lbs. 12 oz.
9 GT 52096Set \$99.49

41-pc. Standard or Metric Sets

SET COMPONENTS: 17 taps and 17 hex dies (1-in. diameter, 1 pipe tap and die), adj. guide die stock, 2 "T" handle tap wrenches, tap reamer wrench, screwdriver, thread gauge, case, instr.

ORDER INFO: Warranty, p. 112. See chart below for sizes.
Standard—Wt. 4 lbs. 15 oz.
9 GT 5201Set \$49.49
Metric—Wt. 4 lbs. 15 oz.
9 GT 52095Set \$49.49

28-pc. Standard or Metric Sets

SET COMP: 11 taps, 11 hex dies (ten 1-in. diam., 1 pipe tap and die), adjustable guide die stock, "T" handle tap wrench, tap reamer wrench, screwdriver, thread gauge, case, instr.

ORDER INFO: See Warranty, pg. 112. See chart below for sizes.
Standard Set
Wt. 3 lbs. 12 oz.
9 GT 5200Set \$34.49
Metric Set
Wt. 4 lbs. 2 oz.
9 GT 52093Set \$34.49

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Miniature Tap and Die Sets for model makers and delicate instrument repair work



22-pc. Standard or Metric Sets

CONSTRUCTION: Carbon steel.
SET COMPONENTS: 8 taps and 8 dies (1 1/16-in. diameter), hexagon die stock, "T" handle tap wrench, tap reamer wrench, screwdriver, thread gauge, case, instr. Includes tap and drill card, case, instructions.

ORDERING INFORMATION: See Warranty on page 112. See chart below, left for sizes.
Standard Set—Wt. 2 lbs. 8 oz.
9 GT 52121Set \$22.99
Metric Set—Wt. 2 lbs. 8 oz.
9 GT 52101Set \$22.99

(2) 12-piece Instrument Tap and Die Set



CONSTRUCTION: Carbon steel.
COMPONENTS, SIZES: Five 1 1/16-inch diameter hex dies, 5 standard taps. Cut sizes 1/4-20, 10-24, 10-32, 8-32, 6-32. Tap wrench and case included.
ORDERING INFORMATION: Shipping weight 10 oz.
9 GT 52118Set \$8.49

(1) 41-piece Tap and Die Set with round, adjustable dies

CONSTR: Tempered carbon steel. Kromedge® finish. Chrome-plated finish.
SET COMPOSITION: 17 taps, 17 dies (adjustable, round, 1-in. diam. Use only with die stocks, 1 pipe tap and die), adjustable guide die stock, tap reamer wrench, 2 "T" handle tap wrenches, thread gauge, screwdriver, case, instr.

ORDERING INFORMATION: See Warranty on page 112. See chart below for sizes.
9 GT 5209—Shipping weight 4 pounds 8 ouncesSet \$49.49

METRIC Thread Types and Sizes

Type of Cut	Thread Sizes (mm)	76-piece Set 52131	59-piece Set 52001 52096	41-piece Set 52095	28-piece Set 52093	22-piece Set 52101
Standard threads	3 x .50	X	X	X	X	X
	3 x .60	X	X	X	X	X
	4 x .70	X	X	X	X	X
	4 x .75	X	X	X	X	X
	5 x .80	X	X	X	X	X
	5 x .90	X	X	X	X	X
	6 x 1.00	X	X	X	X	X
	7 x 1.00	X	X	X	X	X
	8 x 1.25	X	X	X	X	X
	9 x 1.00	X	X	X	X	X
Metric threads	9 x 1.25	X	X	X	X	X
	10 x 1.25	X	X	X	X	X
	10 x 1.50	X	X	X	X	X
	11 x 1.50	X	X	X	X	X
	12 x 1.50	X	X	X	X	X
	12 x 1.75	X	X	X	X	X
	14 x 1.25	X	X	X	X	X
	14 x 2.00	X	X	X	X	X
	16 x 1.50	X	X	X	X	X
	16 x 2.00	X	X	X	X	X
BSP Pipe thread	1/8 x 28	X	X	X	X	X
	1/4 x 19	X	X	X	X	X

Rethreading Tools

(3) Tap Sets for Coarse and Fine Internal Threads

CONSTRUCTION: Carbon steel.
COMPONENTS, SIZES: 6 taps cut 1/4, 5/16, 3/8, 7/16, 1/2 and 9/16-inch sizes. Plastic storage case.

ORDER INFO: Shpg. wt. 10 oz.
National Fine (SAE) Taps
9 GT 52114Set \$5.29
National Coarse (USS) Taps
9 GT 52113Set \$5.29

(4) Die Sets for Fine and Coarse External Threads

CONSTRUCTION: Carbon steel.
COMPONENTS, SIZES: 8 dies cut 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4-inch sizes. Plastic storage case.

ORDER INFO: Shpg. wt. 6 oz.
National Fine (SAE) Dies
9 GT 52112Set \$5.29
National Coarse (USS) Dies
9 GT 52111Set \$5.29

STANDARD-Size Taps and Dies

SIZES, TYPES, ORDERING INFORMATION:

Size of item	Taps			Die diam.	Adjustable Round Dies			Hex Dies		
	Cat. No.	Wt.	Price		Cat. No.	Wt.	Price	Cat. No.	Wt.	Price
National Coarse (USS) Threads										
1/4-20	9 GT 5222	2 oz.	89c	1 in.	9 GT 5226	3 oz.	\$1.69	9 GT 5227	3 oz.	\$1.19
3/8-18	9 GT 5222	2 oz.	\$1.29	1 in.	9 GT 5226	3 oz.	1.69	9 GT 5227	3 oz.	1.19
1/2-16	9 GT 5221	3 oz.	1.08	1 in.	9 GT 5226	3 oz.	1.69	9 GT 5227	3 oz.	1.19
3/4-14	9 GT 5223	3 oz.	1.49	1 in.	9 GT 5226	3 oz.	1.69	9 GT 5227	3 oz.	1.19
1-13	9 GT 5224	3 oz.	1.69	1 in.	9 GT 5226	3 oz.	1.69	9 GT 5227	3 oz.	1.19
1 1/8-12				1 1/2 in.	9 GT 5226	4 oz.	4.39	9 GT 5224	4 oz.	3.89
1 1/4-11	9 GT 5225	4 oz.	2.39	1 1/2 in.	9 GT 5226	4 oz.	4.39	9 GT 5224	4 oz.	3.89
1 1/2-10	9 GT 5226	5 oz.	2.89	1 1/2 in.	9 GT 5226	4 oz.	4.39	9 GT 5224	4 oz.	3.89
1 3/4-9	9 GT 5227	7 oz.	3.89	1 1/2 in.	9 GT 5226	4 oz.	4.39	9 GT 5224	4 oz.	3.89
2-9	9 GT 5223	10 oz.	4.99					9 GT 5233	5 oz.	5.99
2 1/8-8	9 GT 5234	13 oz.	5.99					9 GT 5233	7 oz.	5.99

National Fine (SAE) Threads														
1/4-28	9 GT 5221	2 oz.	89c		1 in.	9 GT 5225	3 oz.	\$1.69		9 GT 5228	3 oz.	1.19		
3/8-32	9 GT 5221	2 oz.	\$1.09		1 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1/2-32	9 GT 5221	3 oz.	1.29		1 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
3/4-32	9 GT 5221	3 oz.	1.49		1 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1-32	9 GT 5221	3 oz.	1.69		1 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1 1/8-28	9 GT 5225	4 oz.	2.39		1 1/2 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1 1/4-28	9 GT 5226	4 oz.	2.89		1 1/2 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1 1/2-28	9 GT 5227	7 oz.	3.89		1 1/2 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1 3/4-28	9 GT 5228	10 oz.	4.99		1 1/2 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		
1-12	9 GT 5229	13 oz.	5.99		1 1/2 in.	9 GT 5225	3 oz.	1.69		9 GT 5228	3 oz.	1.19		

Machine Screw Taps and Dies—all N.C. (except 10-32 is N.F.)														
4-40	9 GT 5219	2 oz.	69c		1 in.	9 GT 5223	3 oz.	\$1.69		9 GT 5229	3 oz.	1.19		
6-32	9 GT 5219	2 oz.	69c		1 in.	9 GT 5223	3 oz.	1.69		9 GT 5229	3 oz.	1.19		
8-32	9 GT 5219	2 oz.	69c		1 in.	9 GT 5223	3 oz.	1.69		9 GT 5229	3 oz.	1.19		
10-32	9 GT 5219	2 oz.	89c		1 in.	9 GT 5223	3 oz.	1.69		9 GT 5229	3 oz.	1.19		
12-24	9 GT 5220	2 oz.	89c		1 in.	9 GT 5224	3 oz.	1.69		9 GT 5229	3 oz.	1.19		
12-24	9 GT 5220	2 oz.	89c		1 in.	9 GT 5224	3 oz.	1.69		9 GT 5229	3 oz.	1.19		

*Round dies, 1 1/2 in. diameter. Hex dies, 1 1/2 in. diameter.
 9 GT 5230—1/2-inch hex Pipe Die. NPT thread. Shpg. wt. 3 oz.\$1.19
 9 GT 5231—1/4-inch hex Pipe Die. NPT thread. Shpg. wt. 5 oz.3.89

METRIC-Size Taps and Hex Dies

SIZES, TYPES, ORDERING INFORMATION:

Taps				Dies			
(mm)	Catalog No.	Wt.	Ea.	(mm)	Catalog No.	Wt.	Ea.
3 x .50	9GT52031	2 oz.	89c	1 in.	9GT52011	3 oz.	\$1.29
3 x .60	9GT52032	2 oz.	89c	1 in.	9GT52012	3 oz.	1.29
4 x .70	9GT52033	2 oz.	89c	1 in.	9GT52013	3 oz.	1.29
4 x .75	9GT52034	2 oz.	89c	1 in.	9GT52014	3 oz.	1.29
5 x .80	9GT52035	2 oz.	89c	1 in.	9GT52015	3 oz.	1.29
5 x .90	9GT52036	2 oz.	89c	1 in.	9GT52016	3 oz.	1.29
6 x 1.00	9GT52037	2 oz.	\$1.09	1 in.	9GT52017	3 oz.	1.29
6 x 1.00	9GT52051	4 oz.	1.19	1 in.	9GT52082	3 oz.	1.29
7 x 1.00	9GT52038	3 oz.	1.19	1 in.	9GT52018	3 oz.	1.29
8 x 1.25	9GT52039	3 oz.	1.39	1 in.	9GT52019	3 oz.	1.29
9 x 1.00	9GT52041	3 oz.	1.49	1 in.	9GT52021	3 oz.	1.29
9 x 1.25	9GT52042	3 oz.	1.49	1 in.	9GT52022	3 oz.	1.29
10 x 1.00	9GT52081	3 oz.	1.69	1 in.	9GT52023	3 oz.	1.29
10 x 1.25	9GT52043	3 oz.	1.69	1 in.	9GT52024	3 oz.	1.29
10 x 1.50	9GT52044	3 oz.	1.69	1 in.	9GT52025	3 oz.	1.29
11 x 1.50	9GT52045	3 oz.	1.89	1 in.	9GT52028	3 oz.	1.29
12 x 1.50	9GT52046	3 oz.	1.89	1 in.	9GT52026	3 oz.	1.29
12 x 1.75	9GT52047	3 oz.	2.19	1 in.	9GT52027	3 oz.	1.29
14 x 1.25	9GT52061	4 oz.	2.69	1 1/2 in.	9GT52071	5 oz.	4.39
14 x 2.00	9GT52062	4 oz.	2.69	1 1/2 in.	9GT52072	5 oz.	4.39
16 x 1.50	9GT52063	5 oz.	3.09	1 1/2 in.	9GT52073	5 oz.	4.39
16 x 2.00	9GT52064	5 oz.	3.09	1 1/2 in.	9GT52074	5 oz.	4.39
18 x 1.50	9GT52065	7 oz.	3.89	1 1/2 in.	9GT52075	5 oz.	4.39
18 x 2.50	9GT52066	7 oz.	3.89	1 1/2 in.	9GT52076	5 oz.	4.39
1/4 x 19*	9GT52067	4 oz.	2.29	1 1/2 in.	9GT52077	5 oz.	4.39
				1 1/2 in.	9GT52078	5 oz.	4.39
				1 1/2 in.	9GT52079	5 oz.	4.39

*British Standard thread pipe tap. *British Standard thread pipe die



(1 and 2) Flush and Standard-cutting Saws
 CONST: Polished nickel-plated. Welded steel frame, reinforced back. 10-in. blade (9 GT 65873) included.

(1) Standard-cutting Saw Cuts in 4 positions. Plastic grip handle. Wt. 1 lb. 12 oz.
 9 GT 3562—Shpg. wt. \$4.89


(2) Flush-cutting Saw Cuts in 4 positions. Plastic enclosed handle.
 Shpg. wt. 2 pounds.
 9 GT 3558—Shpg. wt. \$5.89

Standard cutting Saw (not shown). As (1) above, except uses only a 10-inch blade.
 9 GT 3563—Shipping weight 1 lb. 1 oz.\$2.89

(3) Close-quarter Hacksaw. Uses any hacksaw blade. Incl. one 10-in. blade.
 9 GT 35481—Shipping weight 12 ounces\$3.89

(5 thru 7) CRAFTSMAN® Hacksaw Blades. Alloy steel. Semi-flexible blades. Package of 5. High-speed design; lasts longer than semi-flex. Package of 2.

SIZES, TYPES, ORDERING INFORMATION: Imported.							
Teeth per in.	Lgth.	Cuts	Semi-flexible Blades	Wt.	Pkg.	High-speed design Blades	Wt.
(5) 32	10	Tubing to 1/4-in. thin metal sheets	9 GT 65875	5	\$1.09	9 GT 65885	4
	12		9 GT 65876	5	1.29	9 GT 65886	4
(6) 24	10	Iron pipe, med. tubing 1/8-1/2 in.	9 GT 65873	5	1.09	9 GT 65883	4
	12		9 GT 65874	5	1.29	9 GT 65884	4
(7) 18	10	Steel bars, brass, copper 1/4 in.	9 GT 65871	5	1.09	9 GT 65881	4
	12		9 GT 65872	5	1.29	9 GT 65882	4



(8) Tap, Reamer Wrenches.
 ORDER INFO: Alloy steel jaws.
 No. 4 Wrench, 1/16 to 1/2-in. taps.
 9 GT 5214—Shpg. wt. 10 oz.\$3.99
 No. 6 Wrench, 1/4 to 3/4-in. taps.
 9 GT 52141—Wt. 1 lb. 10 oz.\$6.99
 No. 7 Wrench, 1/4 to 1 1/8-in. taps and 1/4, 3/4-in. pipe taps.
 9 GT 52142—Wt. 2 lbs. 13 oz.\$12.99

(9) Die Stocks. Alloy steel.
 ORDERING INFORMATION:
 For 1-in. hex dies, adjustable guide.
 9 GT 52185—Shpg. wt. 11 oz.\$4.49
 For 1-in. round dies, adj. guide.
 9 GT 52182—Shpg. wt. 14 oz.\$4.49
 For 1 1/2-in. round, 1 1/8-in. hex dies, adjustable guide.
 9 GT 52181—Wt. 1 lb. 14 oz.\$7.49
 For 1 1/8-in. hex dies.
 9 GT 52183—Wt. 3 lbs. 5 oz.\$12.99

(10) Hand Reamer. Steel. Reams 1/8 to 3/4-in. diameter.
 ORDERING INFORMATION:
 9 GT 5492—Shpg. wt. 6 oz.\$4.99

(11) Tapered Reamer. Heat-treated steel. For 1/8 to 1/2-in. holes. 5 3/4 in. long.
 ORDERING INFORMATION:
 9 GT 5479—Shpg. wt. 5 oz.\$4.99
 Thread gauges. As in sets, page 44.
 ORDERING INFORMATION: Wt. 3 oz.
 9 GT 52229—Standard\$2.49
 9 GT 52029—Metric2.49



(15) Pickup Tool. Steel jaws. Pushbutton to open, release to close.
 ORDERING INFORMATION:
 23 1/2 inches long. Shpg. wt. 7 oz.
 9 GT 41322—\$2.47

(16) Flexible Magnetic Pickup Tool. Spring shaft. Permanent head. Plastic handle. Nickel-plated. 17 1/2 in. long.
 ORDERING INFORMATION:
 9 GT 4178—Shpg. wt. 5 oz.\$2.57

(12) Adjustable Ratchet Tap Wrench
 Steel. Centerless ground, polished. Self-equalizing jaws. Deep-seating teeth. 3/16-inch cap. "T" handle.
 ORDERING INFORMATION:
 9 GT 4065—Shpg. wt. 12 oz.\$7.99

(13) Tap Wrenches. Steel.
 ORDERING INFORMATION:
 Fits to 12 machine screw, 3 to 5 mm taps.
 9 GT 42101—Shpg. wt. 4 oz.99c
 Fits 1/8 to 1/4-in.; up to 14 machine screw and up to 5 mm taps.
 9 GT 4066—Shpg. wt. 8 oz.\$3.99
 Fits No. 12 to 3/16-in.; 5 to 8 mm taps.
 9 GT 42102—Shpg. wt. 6 oz.1.49
 Fits 1/4 to 1/2-in.; 6 to 12 mm taps.
 9 GT 4067—Shpg. wt. 15 oz.4.99
 Use with ratchets and 1/4, 1/2-in. taps.
 9 GT 42103—Shpg. wt. 9 oz.\$1.99

(14) Tap and Drill Set. 6 Kromedge® machine taps (4-40, 6-32, 8-32, 10-32, 12-24, 1/4-20) drill sizes above; flutes (sizes 43, 36, 29, 25, 21, 7), "T" handle tap wrench, case.
 ORDERING INFORMATION:
 9 GT 5208—Shpg. wt. 10 oz.\$8.99

Permanex® Cases
 ORDERING INFORMATION:
 Case as in 59-pc. sets on page 44.
 9 GT 5218—Shpg. wt. 3 lbs. 7 oz.\$9.99
 Case as in 41-pc. set on page 44.
 9 GT 5219—Shpg. wt. 1 lb. 4 oz.\$5.99

(17) Magnetic Pickup Tool with extension. Extends to 26 3/4 in. Lifts up to 8 oz. Double ball, socket joint. 2 3/4-in. long.
 ORDERING INFORMATION:
 9 GT 4132—Shpg. wt. 9 oz.\$3.17

(18) Magnetic Pickup Tool/Stud Finder. Magnet ends. Pocket clip. 5 3/4 in. long.
 ORDERING INFORMATION:
 9 GT 4001—Shpg. wt. 3 oz.\$1.59



(19) CRAFTSMAN® Adjustable File and Tool Handle. For tools with tangs up to 1/4-in. diameter. Use as handle for files, rasps, blades.
 ORDERING INFORMATION:
 9 GT 6775—Shpg. wt. 6 oz.\$1.99

(20) CRAFTSMAN® File Cleaning Brush. Wood with steel bristles. 8 1/2 inches long.
 ORDERING INFORMATION:
 9 GT 6782—Shpg. wt. 4 oz.\$1.59

(21) CRAFTSMAN® File Handles. Machine-turned, varnished wood.
 SIZES, ORDERING INFORMATION:

Cat. No.	Size	Wt.	Ea.	5 for
9 GT 67811	X-small	3 oz.	59c	\$2.49
9 GT 67812	Small	3 oz.	59c	2.49
9 GT 67813	Medium	4 oz.	59c	2.49

(22) CRAFTSMAN® Ignition File. Double-cut teeth. Kromedge® 5 inches.
 ORDERING INFORMATION:
 9 GT 3119—Shpg. wt. 3 oz.49c

(23) CRAFTSMAN® Needle File Set. Swiss pattern. Kromedge®. Med. cut, No. 2 files. 5 1/2 in. long. Set of 12.
 ORDERING INFO: Imported.
 9 GT 6759—Shpg. wt. 9 oz.\$12.99

(24 thru 32) CRAFTSMAN® Files. Chrome-plated steel. Plastic cases.
 TYPES, SIZES, ORDER INFO: Imported.

Type	Catalog Number	Size in.	Wt. oz.	Each
(24) Shoe Rasps	9 GT 31224	8	7	\$2.39
	9 GT 31225	10	10	2.89
(25) Wood Rasps	9 GT 31215	10	11	2.99
(26) Mill Files	9 GT 31292	8	4	1.19
	9 GT 31294	8	6	1.59
	9 GT 31295	10	9	1.99
(27) Crosscut Saw File	9 GT 3120	8	6	1.99
(28) Flat Bastard File	9 GT 31254	8	7	1.99
	9 GT 31255	10	12	2.49
(29) Half Round Bastard File	9 GT 31234	8	7	2.39
	9 GT 31235	10	11	2.99
(30) Round Bastard File	9 GT 31242	6	4	1.19
	9 GT 31244	8	5	1.69
	9 GT 31245	10	7	1.89
(31) Warding File	9 GT 3132	4	2	1.19
(32) Mill File (2 round edges)	9 GT 3128	8	6	1.79

File Assortment. Sep. prices total \$7.66. Incl. 1 each of 8-in. files (24), (26), (28), (30) from chart above.
 9 GT 31289—Wt. 1 lb. 9 oz.\$6.88



Plumbing Shop

Pipe and Plumbing Wrenches

Heavy-duty
Pipe Wrench

\$349

8-in. size

CRAFTSMAN® Heavy-duty
Pipe Wrench

\$579

8-in.
size

(1) CRAFTSMAN® Heavy-duty Pipe Wrench

CONSTRUCTION: One-piece, ductile-steel housing, frame and handle. Forged-steel jaws. Precision milled teeth. SIZE, ORDER INFO: Imported. See Warranty, page 112.

Catalog Number	Size in.	Cap. in.	Shpg. wt.	Price
9 GT 55675	8	1	1 lb. 1 oz.	\$5.79
9 GT 55676	10	1½	2 lbs. 2 oz.	7.69
9 GT 55677	14	2	3 lbs. 14 oz.	10.49
9 GT 55678	18	2½	6 lbs. 3 oz.	13.99
9 GT 55679	24	3	9 lbs. 15 oz.	22.49

(2) Sears Heavy-duty Pipe Wrench

Cast iron, forged-steel jaws. SIZES AND ORDER INFORMATION: Imported.

Catalog Number	Size in.	Cap. in.	Wt. lbs. oz.	Price
9 GT 30856	8	1	1 3	\$3.49
9 GT 30851	10	1½	1 14	3.79
9 GT 30852	14	2	3 8	5.79
9 GT 30854	18	2½	5 13	7.79

(3) CRAFTSMAN Aluminum Pipe Wrenches

For tight positions. Saves unnecessary effort.

CONSTR: Alum. housing, frame and handle. Light-weight handling, without loss of strength.

SIZES, ORDERING INFO:

Catalog Number	Size in.	Cap. in.	Wt. lbs. oz.	Price
9 GT 55698	18	2½	3 2	\$16.99
9 GT 55699	24	3	4 10	26.99
9 GT 5569C	36	5	10	49.99

(4) CRAFTSMAN Reversing Pipe Wrenches

CONSTRUCTION: Forged high-carbon boron steel handle and chain. Ratcheting-type.

SIZE, CAPACITY, ORDER INFO: See Warranty, page 112.

4-in. outside diameter capacity. 12-inch handle, 15-inch chain.

Shipping weight 1 lb. 12 oz.

9 GT 55713 \$8.97

5-in. outside diam. cap. 16-in. handle, 19½-in. chain. Wt. 3 lbs. 5 oz.

9 GT 55714 \$10.97

(5) Slip and Locknut Wrench

CONST: Cadmium-plated, malleable iron. 10½ in. long. Adjustable jaws for slipnuts on "P" or "S" sink traps. ¾ to 3-in. cap.

ORDER INFO: Not Craftsman. Shpg. wt. 1 lb. 10 oz. 9 GT 55651 \$7.79

(6) Angle-Tapered Seat Wrench

Fits square or hex holes. CONST: Cadmium-plated steel. "L" shaped.

ORDER INFO: Not Craftsman. Shpg. wt. 11 oz. 9 GT 55652 \$3.89

(7) CRAFTSMAN Basin Wrench

CONST: Steel handle. Self-adjusting, high-carbon steel jaws, return spring. Capacity 1½ in. 11 in. long.

ORDER INFO: See Warranty on page 112. Wt. 1 lb. 4 oz. 9 GT 55686 \$4.47



(8) Drill-powered Drain Auger

Hooks up to your ¼, ⅜ or ½-in. drill to bore through most packed deposits in drains or pipes

\$2959

CONSTRUCTION: Drophead attached to end of coil designed to turn as it digs. Packed deposits in pipes and drains are bored loose without chemical use. Piano wire coil is ¼ in. x 25 ft. long. Coil is neatly stored in steel canister. . . zinc-plated to resist rust, corrosion. Feed coil into drain by loosening collet nut and pulling coil out.


ORDERING INFO: See our selection of electric drills on pages 62 and 63.

9 GT 55472—Wt. 8 lbs. 8 oz. \$29.59

Drain Auger (not shown). As above, but extra heavy-duty, 50 ft. coil wire.

ORDERING INFORMATION:

9 GT 55475—Wt. 11 lbs. 8 oz. \$54.99

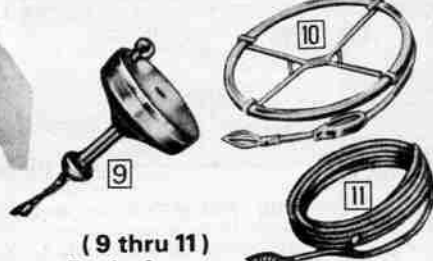

(9 thru 11) Drain Augers and Sewer Rods

(9) **Crank-feed Drain Auger.** 25-ft. wire coil. CONSTRUCTION: ¼-in. coil rewinds into steel canister. Tumble head, 2 universal joints.

ORDERING INFORMATION: 9 GT 55356—Shpg. wt. 6 lbs. 8 oz. \$16.69

(10) **Flat Sewer Rods.** Steel storage frame. CONSTRUCTION: High-carbon snake steel. Revolving spear point. Handle grips rod at any point.


SIZES, ORDERING INFORMATION:

Catalog Number	Length	Width	Thickness	Shpg. wt.	Price
9 GT 5509C	50 ft.	½ in.	⅜ in.	8 lbs.	\$11.79
9 GT 55391C	75 ft.	¾ in.	½ in.	12 lbs.	24.59
9 GT 55094C	75 ft.	¾ in.	⅝ in.	21 lbs.	49.99
9 GT 5540C	100 ft.	¾ in.	⅝ in.	18 lbs.	29.59
9 GT 55092C	100 ft.	¾ in.	⅝ in.	38 lbs.	59.99
9 GT 55093L	150 ft.	¾ in.	⅝ in.	53 lbs.	84.99

(11) **Drain and Trap Auger**
CONST: ¾-in. wide spring steel coil. Auger handle grips spring at any point. Coil measures 50 ft. long.

ORDERING INFORMATION:

9 GT 55345—Shpg. wt. 12 lbs. 2 oz. \$11.79

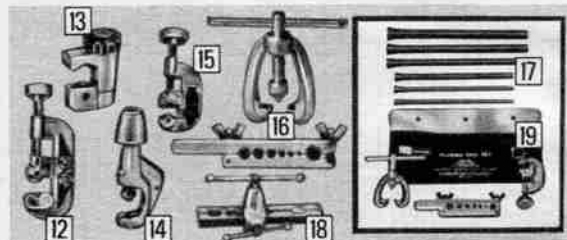

CRAFTSMAN® Tubing Tools . . . you can cut, bend, join and flare thinwall tubing

(12) **Heavy-duty Tubing Cutter** for ¼ to 1½-in. outside diameter tubing

CONSTRUCTION: Steel alloy cutting wheel. Zinc frame. Twin reamers and 2 facing, flare-groove rollers.

ORDERING INFO: See Warranty, p. 112. Wt. 1 lb. 6 oz.

9 GT 5528 \$7.29

(13) **Midget Tubing Cutter** for close-quarter jobs. Needs 1½-in. clearance for ½ to ½-in. outside diam. tubing.

CONSTRUCTION: Steel alloy cutting wheel. Zinc frame. Feed knob.

ORDERING INFO: See Warranty, p. 112. Wt. 6 oz.

9 GT 5560 \$4.39

(14) **Enclosed-feed Tubing Cutter**

CONSTRUCTION: Two steel alloy cutting wheels. Zinc frame. Slide-lock retractable safety reamers, 2 facing flare-groove rollers. Feed knob. Outside diam. ⅜ to 1½-in. tubing.

ORDERING INFO: See Warranty, p. 112. Wt. 15 oz.

9 GT 5531 \$7.29

(15) **Tubing Cutter** for up to 1-in. outside diameter tubing

CONSTRUCTION: Steel alloy cutting wheel. Zinc frame. Slide-lock reamer, 2 facing rollers. Feed knob.

ORDERING INFO: See Warranty, p. 112. Wt. 12 oz.

9 GT 5533 \$5.29

(16) **Flaring Tool.** For 7 thinwall tubing sizes: ⅜, ½, ⅝, ¾, ⅞, 1, 1½, and 2-in. outside diameter.

CONST: Steel yoke, swivel cone, steel slide-bar handle.

ORDERING INFO: See Warranty, p. 112. Wt. 2 lbs. 4 oz.

9 GT 55371 \$12.49

(17) **6-pc. Tube-Bending Set.** For thinwall tubing with ¼ to ¾-in. outside diameter.

CONSTRUCTION: Tempered, spring-steel tubes with flared ends. Cadmium-plated.

ORDERING INFO: See Warranty, p. 112. Wt. 1 lb. 15 oz.

9 GT 55411 Set \$3.79

(18) **Extra heavy-duty Flaring Tool.** For 8 thinwall sizes: ⅜, ½, ⅝, ¾, ⅞, 1, 1½, 2, 2½, and 3-in. outside diameter.

CONSTRUCTION: Rigid ductile-iron frame. Steel die bar. Slide bar handles.

ORDERING INFO: See Warranty, p. 112. Wt. 3 lbs.

9 GT 55481 \$32.99

(19) **9-pc. Flaring Tool Set** For copper, aluminum, brass and thinwall tubing.

SET: Includes Tubing Cutter (15), Flaring Tool (16), 6-pc. Tube-bending Set (17), and plastic storage pouch.

ORDERING INFO: See Warranty, p. 112. Wt. 4 lbs. 10 oz.

9 GT 55271 Set \$19.99

Replacement Cutter Blade For (12), (14), (15).

ORDER INFO: Wt. 3 oz.

9 GT 5529 89c



Power Drain Cleaner shoots a blast of air to clear blockages in pipes from 1/2 to 2 inches in diameter

\$4999 without
bulbs

You can clear blockages in drains, heating and cooling systems with pipes from ½ to 2 inches in diameter. Power Drain Cleaner can clean entire line up to 250 feet. Works in 30 seconds or less without caustic chemicals or augers.

DISCHARGE GUN: Discharges air from carbon dioxide bulb, sold below. One bulb can clear one blockage.

DRAIN COVER: 1, 1½, 2, 2½, 3, 6-in. drain covers fit end of gun to prevent splash back.

ORDERING INFO: Imported. Shipping weight 4 lbs.

9 GT 55471 \$49.99

Carbon dioxide Bulbs. 1 bulb clears 1 blockage. Box of 10.

ORDERING INFO: Wt. 15 oz.

9 GT 55473 Box \$3.49

Propane Kits and Mapp® Gas Kits

Instant-action levers control flame for safety, convenience and fuel efficiency

CRAFTSMAN® Propane Kits and Accessories

(1) 13-piece Kit

KIT COMP: Fuel-saving torch has instant-action lever; pencil flame burner; 14.1-oz. by weight cylinder; extra cylinder; utility burner; spark lighter; 6 extra flints; plastic case; soldering tip and flame spreader that fit pencil flame and utility burners.

ORDERING INFO: UL listed. See "N" suffix, page 69. 9 GT 54285N—Wt. 7 lbs.* \$18.79

Instant-action Torch alone. As (1) above. With pencil flame burner, cylinder.

ORDERING INFO: UL listed. See "N" suffix, page 69. 9 GT 54281N—Wt. 3 lbs.* \$12.89

Regular-action Torch (not shown). As above, but without instant-action lever. Pencil flame burner, cylinder.

ORDERING INFO: UL listed. See "N" suffix, page 69. 9 GT 54251N—Wt. 3 lbs.* \$7.99

6-piece Kit (not shown).

KIT COMPOSITION: Regular-action torch; pencil flame burner; 14.1-oz. by weight cylinder; needle valve for shut-off; utility burner; spark lighter; soldering tip; flame spreader; plastic case.

ORDERING INFO: UL listed. See "N" suffix, page 69. 9 GT 54261N—Wt. 4 lbs.* \$15.99

Extra Propane Cylinder (not shown). Holds 14.1 oz. by wt., 26.7 fluid oz.

ORDERING INFORMATION: See "N" suffix, page 69. Cylinder Shpg. wt. 3 lbs.* 9GT5491N—Ea. \$1.49; 2 for \$2.79

Pkg. of 12 Cylind. Wt. 24 lbs.* 9 GT 54914N—Pkg. \$16.49

Jumbo Propane Cylinder (not shown). Tank holds 16.4 oz. by weight, 31.1 fluid ounces.

ORDERING INFORMATION: See "N" suffix, page 69. 9 GT 54912N—Wt. 3 lbs.* \$1.89

*Note to Alaska and Hawaii customers: Propane and Mapp Gas cylinders must, by law, be shipped via surface transportation. Please contact local selling unit, before ordering. Allow extra time for delivery.

CRAFTSMAN®

Mapp® Gas Kits and Accessories

(2) 16-piece Mapp Gas Kit

Mapp Gas torches burn hotter, work faster and use less fuel than propane torches shown at left. Each cylinder contains 14% more usable fuel than comparable propane cylinders. It's the ideal tool for projects which require greater heat; customizing cars and brazing copper and steel.

KIT COMP: Torch has instant-action lever that helps save fuel, allows greater safety, as you control height of flame. Pressure regulator, standard tip, 16-oz. by wt., extra cylinder, spark lighter, 6 flints, 5 brazing rods, extra tip for detailed work. Plastic case.

ORDER INFO: "N" suffix, page 69. Wt. 8 lbs.* 9 GT 54334N—Kit \$35.79



16-piece Kit. As (2), except regular-action torch. ORDER INFO: "N" suffix, page 69. Wt. 8 lbs.* 9 GT 54332N—Kit \$29.79

Mapp® Gas Torch. Regulated. 16 oz. cylinder. ORDER INFO: "N" suffix, page 69. Wt. 3 lbs. 4 oz.* 9 GT 54333—\$17.89

Mapp® Gas Cylinder. Holds 16 oz. by wt. ORDER INFO: "N" suffix, p. 69. Wt. 3 lbs.* 9 GT 54921N—\$3.39

Case of 12 Mapp Gas Cylinders. Each holds 16 ounces by weight. ORDER INFO: "N" suffix, page 69. Wt. 26 lbs.* 9 GT 54924N—Pkg. \$35.99

Spark Lighter. Protective cap. Includes 1 flint. ORDER INFO: Wt. 4 oz. 9 GT 5440—\$5.99

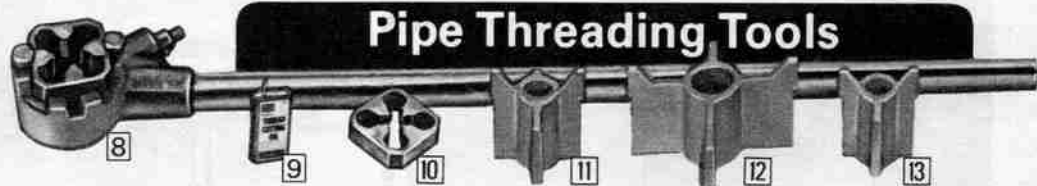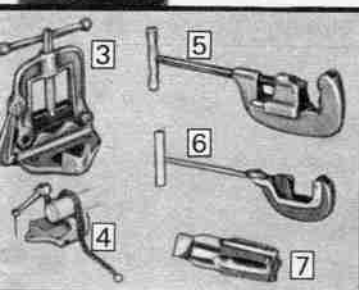

(8) CRAFTSMAN Heavy-duty Pipe Threader Stock. Single-pawl, ratchet-action. Die not incl. Malleable-iron head on steel handle stock. SIZES, ORDERING INFO: See Warranty on page 112.

Threader Stock for 2x2-in. Dies. Shpg. wt. 4 lbs. 5 oz. 9 GT 54802—\$29.99

Threader Stock for 2½x2½-in. Dies. Shpg. wt. 4 lbs. 15 oz. 9 GT 54803—\$29.99

Threader Stock for 4x4-in. Dies. Shpg. wt. 7 lbs. 9 GT 54804C—\$42.99

Metal Rack for 2x2-in. pipe threading equipment (not shown). Holds threader, 5 dies, 5 bushings (not incl.). ORDER INFO: Wt. 2 lbs. 7 oz. 9 GT 54805—\$4.39

Metal Rack for 2½x2½-in. pipe threading equipment (not shown). Holds threader, 4 dies, 4 bushings (not incl.). ORDER INFO: Wt. 3 lbs. 7 oz. 9 GT 54806—\$4.99

(9) Thread Cutting Oil. Helps increase life of tool. SIZES AND ORDERING INFO: ½-pt. Shpg. wt. 12 oz. 9 GT 55211—\$1.99 1-quart. Shpg. wt. 2 lbs. 6 oz. 9 GT 55212—\$3.59

(10) Solid 2x2-in. Pipe Dies. Chip-ejecting and self-feeding. SIZES, ORDER INFO: See Warranty, pg. 112. Wt. 10 oz. Ea. \$11.99

Catalog No.	For pipe diam.
9 GT 55101	¼-inch
9 GT 55102	⅜-inch
9 GT 55103	½-inch
9 GT 55104	¾-inch
9 GT 55105	1-inch

(10) Solid 2½x2½-in. Pipe Dies. Chip-ejecting and self-feeding. SIZES, ORDER INFO: See Warranty, pg. 112. Wt. 14 oz. Ea. \$12.99

Catalog No.	For pipe diam.
9 GT 54701	¼-inch
9 GT 54702	⅜-inch
9 GT 54703	½-inch
9 GT 54704	¾-inch
9 GT 54705	1-inch
9 GT 54706	1½-inch

(10) Solid 4x4-in. Pipe Dies. Chip-ejecting and self-feeding. SIZES, ORDER INFO: See Warranty, pg. 112. Shpg. wt. 1 lb. 6 oz. Each \$16.99

Catalog No.	For pipe diam.
9 GT 54721	¼-inch
9 GT 54722	⅜-inch
9 GT 54723	½-inch
9 GT 54724	¾-inch
9 GT 54725	1-inch
9 GT 54726	2-inch

(11) Guide Bushings†. For 2½x2½-in. solid dies. SIZES, ORDER INFO: See Warranty, pg. 112. Wt. 9 oz. Ea. \$3.59

Catalog No.	For pipe diam.
9 GT 54651	¼-inch
9 GT 54652	⅜-inch
9 GT 54653	½-inch
9 GT 54654	¾-inch
9 GT 54655	1-inch

(12) Guide Bushings†. Use with 4x4-in. solid dies only. SIZES, ORDER INFO: See Warranty, pg. 112. Wt. 12 oz. Ea. \$5.29

Catalog No.	For pipe diam.
9 GT 54661	¼-inch
9 GT 54662	⅜-inch
9 GT 54663	½-inch
9 GT 54664	¾-inch
9 GT 54665	1-inch

(13) Guide Bushings†. Use with 2x2-in. solid dies only. SIZES, ORDER INFO: See Warranty, pg. 112. Wt. 8 oz. Ea. \$2.89

Catalog No.	For pipe diam.
9 GT 54641	¼-inch
9 GT 54642	⅜-inch
9 GT 54643	½-inch
9 GT 54644	¾-inch
9 GT 54645	1-inch

Vise, Cutter and Taps for cutting Tubing or Pipes

(3) Pipe Vise. Malleable-iron frame. Steel jaws. Easy release, pipe support. For ½ to 1½-in. outside diam. pipe.

ORDERING INFORMATION: 9 GT 55511—Wt. 3 lbs. 15 oz. \$15.49

(4) CRAFTSMAN Chain-type Pipe Vise. 8000-lb. breaking strength. Ductile-iron frame, jaws. ½ to 3-inch outside diameter pipe.

ORDER INFO: See Warranty, page 112. 9 GT 5557—Wt. 5 lbs. 10 oz. \$23.49

(5) CRAFTSMAN Pipe Cutter. Cast-iron head, steel handle. Tool steel cutting wheel. Two rollers. No. 2 size, cuts ½ to 2-inch outside diameter pipe.

ORDER INFO: See Warranty, page 112. 9 GT 55072—Shpg. wt. 6 lbs. \$44.99

Replacement Cutting Wheel for (5). 9 GT 55033—Shpg. wt. 2 oz. \$2.79

(6) Saunders-type Pipe Cutter. Tool-steel cutting wheel, 2 steel rollers. SIZES, CAPACITIES, ORDERING INFO: No. 1 cuts ½ to 1½-in. outside diam. 9 GT 55023—Wt. 2 lbs. 15 oz. \$17.59

No. 2 cuts ½ to 2-in. outside diameter. 9 GT 55024—Wt. 5 lbs. 7 oz. \$21.99

Replacement Cutting Wheels. No. 1 for 9GT55023, former 9-55021. No. 2 for 9GT55024, former 9-5507, 9-55022. SIZES, ORDERING INFORMATION: 9 GT 55031—No. 1. Wt. 2 oz. \$3.49 9 GT 55032—No. 2. Wt. 2 oz. \$3.49

(7) Taper-style Kromedged® Pipe Tap. Chrome-plated steel pipe tap. Self-threading. SIZES, ORDERING INFORMATION:

Catalog No.	Size	Threads per in.	Wt.	Each
9 GT 54531	¼-in.	27	3 oz.	\$1.29
9 GT 54532	⅜-in.	18	4 oz.	\$1.89
9 GT 54533	½-in.	18	5 oz.	\$2.49
9 GT 54534	¾-in.	14	6 oz.	\$3.69
9 GT 54535	1-in.	14	10 oz.	\$5.79
9 GT 54536	1-in.	11½	1 lb.	\$8.49

(14) CRAFTSMAN Solid 2-Die Pipe Threader Set. 2x2-inch dies. Self-feeding, inserted tool steel cutters. Solid-guide bushings. Cuts threads on pipes with ½ and ¾-inch outside diameter. Taper threads provide tight joints. Includes ½-pt. of thread cutting oil.

ORDERING INFORMATION: See Warranty on page 112. Shipping weight 5 lbs. 14 oz. 9 GT 5524—Set \$42.99

(15) Guide Bushings. For use with pipe threader (14) left with solid 2x2-inch dies only. ORDERING INFORMATION: Warranty, page 112. Shipping weight 8 ounces.

Catalog Number	For Pipe diameter	Each
9 GT 5463	¼-inch	\$2.89
9 GT 54631	⅜-inch	2.89
9 GT 54632	½-inch	2.89
9 GT 54633	¾-inch	2.89
9 GT 54634	1-inch	2.89

CRAFTSMAN® Pipe Threading Sets

13-pc., 2x2-in. Set (not shown). Separate prices tot. \$110.77.

SET COMPOSITION: 2x2-in. threader stock, rack, dies, bushings† for ¼, ⅜, ½, ¾, 1-in. pipe. ½-pt. thread cutting oil.

ORDER INFO: Warranty, pg. 112. 9 GT 5387C—Wt. 11 lbs. Set \$99.99

9-pc., 2x2-in. Set (not shown). Separate prices tot. \$81.01.

SET COMPOSITION: 2x2-inch threader stock, rack, dies, bushings† for ½, ¾, 1-in. pipe. ½-pt. thread cutting oil.

ORDER INFO: Warranty, pg. 112. Shipping weight 10 pounds. 9 GT 5396C—Set \$74.99

11-pc., 2½x2½-in. Set (not shown). Separate prices tot. \$103.29.

SET COMPOSITION: 2½x2½-in. threader stock, rack, dies, bushings† for ½, ¾, 1, 1½-in. pipe. ½-pt. thread cutting oil.

ORDER INFO: Warranty, pg. 112. Shipping weight 14 pounds. 9 GT 5391C—Set \$96.99

8-pc., 4x4-in. Set (not shown). Separate prices tot. \$111.82.


SET COMP.: 4x4-in. threader stock, dies, bushings† for 1½, 1½, 2-in. pipe. ½-pt. thread cutting oil.

ORDER INFO: Warranty, pg. 112. 9GT5388C—Wt. 16 lbs. Set \$88.99



YOU CAN DO IT

with the tools in our Framing Shop
Here's How...

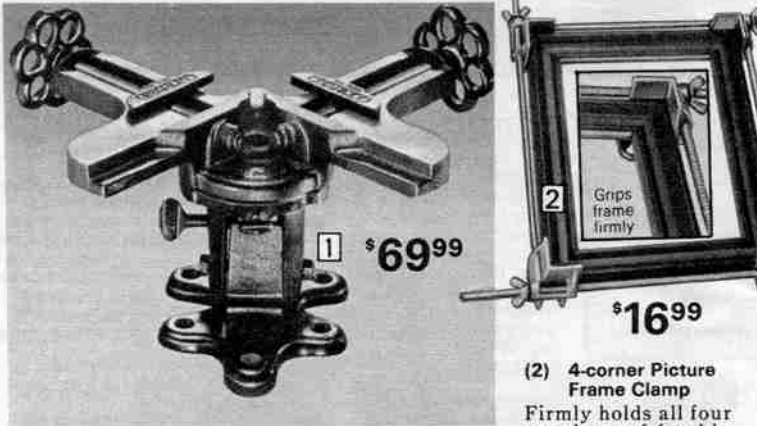

1 \$69.99

2 \$16.99

(1) New at Sears Framing Vise . . . securely holds two sides of frame for precise 90° corners

Designed to provide precision joining of frame members for tight, close-fitting corners.

HOW IT WORKS: Firmly holds any two sides of frame in position for cutting, nailing or glueing at a precise 90° angle . . . helps minimize fit errors.

CONSTRUCTION: Cast-iron and steel construction. Knobs on each side let you tilt vice up to 90° and rotate it a full 360°. Accepts moulding up to four inches wide, yet can join frames as small as 3½x3½ inches.

ORDERING INFORMATION:

9 GT 5170—Shipping weight 14 lbs. 2 oz. \$69.99


(2) 4-corner Picture Frame Clamp

Firmly holds all four members of freshly glued frame at desired tension. Adjustable . . . fits frames from 4 to 35 in. square or up to 23x47-in. Disassembles for compact storage.

INCLUDES: 8 plated, threaded steel rods, 4 aluminum corner with connectors, plated thumb nuts. Instr.

ORDERING INFO:

Shpg. wt. 5 lbs. 13 oz.
9 GT 32054 \$16.99

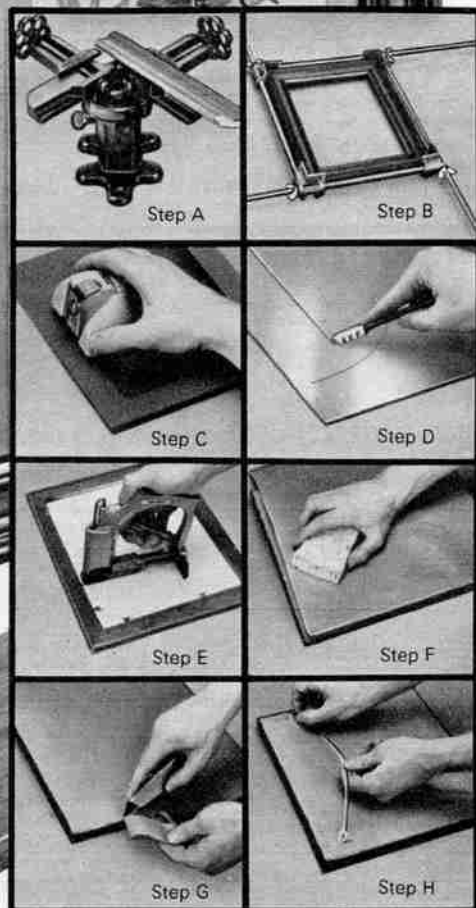

Step A

Step B

Step C

Step D

Step E

Step F

Step G

Step H

STEP A: Cut frame members to exact length and precise angle desired. For precision fit, use our Framing Vise, Miter Box or one of our Picture Framing Kits. Check angle cuts with our Combination Square. Measure lengths with our Lock Tape.

STEP B: Assemble frame members into a square. Our Frame Clamp lets you join them all at once for a perfectly square frame. Frame clamps are also included in our Framing Kits. Use Titebond® Glue, Model Maker's Hammer with Nail-setting Tool or Push Drill Set to join the members.

STEP C: Select mat board for mounting art. Using X-acto Mat Cutter, cut board to fit outside dimensions of frame; cut hole in center of mat board slightly smaller than art being framed. Center the art on the back of the mat board and tape down.

STEP D: Select glass pane to fit over art. Buy pre-cut glass or cut

it to size yourself with Glass Cutter. Use either windowpane or non-glare glass. Insert glass into frame, then place mat board with art (or art alone if mat board not desired) onto glass.

STEP E: Cut cardboard to fit into back of frame as a filler. Secure cardboard in frame with push points, either manually or with our Push Point Tool.

STEP F: Select craft paper to fit over back of frame. Cut paper slightly larger than outside dimensions of frame. Wet paper with a sponge; glue to back of frame.

STEP G: When paper dries, trim off excess with our Utility Knife. Remove excess glue with Super-Fine sandpaper on page 66.

STEP H: Attach a hanger from our Assortment of Hangers and Fasteners. Your picture frame is complete. You'll be surprised at the frames you can make with the tools in our Framing Shop.

All you need is a little know-how and you can do it!



Table Saw Kit
\$39.99

Radial Saw Kit
\$34.99



\$5.49

\$7.79

(5) Framing Kits for table or radial saws

BOTH KITS INCLUDE: Aluminum frame clamp which adjusts from 4 to 35 in. sq. or to 23x47-in. X-acto mat cutter. Instr.

RADIAL SAW KIT INCL: Stop-length gauge for repetitive cuts, hold-down clamp for precise miter cuts.

TABLE SAW KIT INCL: Miter square for precise square joint cuts without adjustment. Instructions.

ORDERING INFORMATION:

Radial Saw Kit. Wt. 10 lbs.

9 GT 32052C Kit \$34.99

Table Saw Kit. Wt. 11 lbs.

9 GT 32059C Kit \$39.99

Frame Clamp alone.

Shpg. wt. 5 lbs. 13 oz.

9 GT 32054 \$16.99

(6) Special Assortment of Hangers, Fasteners

Assortment includes. Enough for over 100 pictures: 12 cloth, five ½-in. tap mount, six 1-lb., six 10-lb., six 20-lb., five 30-lb., three 50-lb. and two 100-lb. capacity hangers; 12 frame hangers; 4 short, 6 long saw tooth hangers; 8 wall hooks; 20 small screw hooks; 40 screw eyes; 25 ft. of No. 3 picture wire. Assorted nails for use with hangers. See-thru plastic case has separate compartments for each type of hanger.

ORDERING INFORMATION:

Shpg. wt. 1 lb. 1 oz.

9 GT 68983 Kit \$5.49

(7) CRAFTSMAN Combination Square

For use in measuring angle cuts . . . helps to assure a perfectly square frame, provides a quick check of miter cuts.

CONSTRUCTION: Polished and oiled steel blade measures 12x1-inch. Black markings on either side; 8ths, 16ths on one side; 16ths, 32nds on other. Cast zinc 4 inches head has extra large level vial and removable scriber.

ORDERING INFORMATION:

Wt. 1 lb. 1 oz.

9 GT 39543 \$7.79



(10) CRAFTSMAN Utility Knife

Light, heavy-duty knife. Positive slide lock.

BLADE: Adjusts to full open, ½ open, ¼ open and closed positions. Includes 3 blades stored in aluminum handle.

ORDERING INFO:

9GT9487-Wt. 7 oz. . . . \$2.19

Replacement Blades (not shown). For (10) above.

ORDER INFO: Pkg. of 5.

9GT9514-Wt. 3 oz. Pkg. 89c

(11) X-acto® Mat Cutter

Cuts mats at 45° bevels, 90° angles. Also cuts balsa wood and plastic. Use for scoring and stripping . . . pull or push cuts.

BLADE: Adjustable depth of cut. Plastic body with positive blade lock holds blade securely. Includes 10 blades.

ORDERING INFO:

Shpg. wt. 13 oz.

9 GT 52641 \$6.89

(12) CRAFTSMAN Glass Cutter

Tungsten-carbide cutting wheel. One-piece malleable iron handle.

ORDERING INFORMATION:


9 GT 3794—Wt. 4 oz. . . \$1.19

(13) CRAFTSMAN Professional quality Push Drill Set

Chrome-plated. Heavy-duty spring. Locking chuck. 8 drill points (⅛ to ⅝ inch). 12 inches long.

ORDERING INFORMATION:

9 GT 4222—Wt. 12 oz. \$13.99

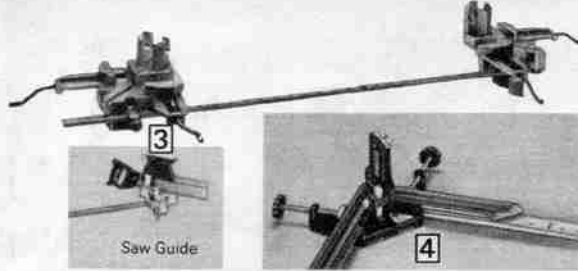

(3) Picture Framing Kit
\$49.99

Designed to let you hold, saw, clamp, glue and nail four-sided picture frames simply and accurately.

KIT INCLUDES: Two corner clamps with adjoining scale . . . no calculations to perform, simply set scale to border dimensions of your picture. Saw and saw guide attach to both cornering devices for mitering right and left 45° cuts. Corner clamp milled for saw kerf.


ORDERING INFORMATION: Shipping wt. 8 lbs.
9 GT 66611C . . . \$49.99

(4) CRAFTSMAN Picture Framing Kit
\$9.99

Eliminate errors in cutting miters to size, cuts 45° miters to length by setting miter stop.

KIT INCLUDES: Corner clamp with saw guide that adjusts to different moulding heights . . . holds miters for gluing or nailing at 90° angle. Built-in measuring gauge with saw guide lets you cut miter lengths from 3 to 26 inches . . . holds frame members up to 3 inches wide.

ORDERING INFORMATION: See warranty, page 131.
Shipping weight 2 lbs. 12 oz.
9 GT 66613 . . . \$9.99

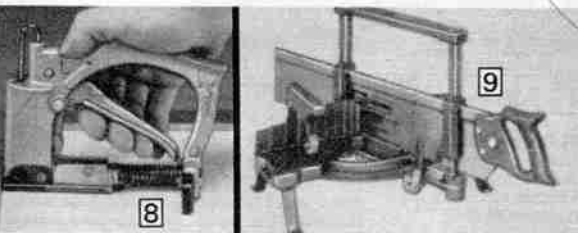

(8) Push Point Tool
\$24.99

Drives in glazing points which hold picture in frame. Eliminates need for hand-setting points . . . just position nose plate where point is desired and squeeze trigger. Use at any angle. Adjustable power stroke.

ORDER INFO: Order diamond-shaped points below. Shpg. wt. 1 lb. 5 oz.
9GT6853 . . . \$24.99

Diamond-shaped Glazing Points. For use with (8) above. Pkg. of 4000. Shipping wt. 1 lb. 4 oz.
9 GT 68531 . . . Pkg. \$6.49

Manual Glazing Points. For hand use only. Will not fit (8) above. 5 ounce pkg. Shipping wt. 3 oz.
9 GT 68532 . . . Pkg. 79c


(9) Our most popular Miter Box with 26x4-in. Kromedge® saw
\$77.59

For making miter cuts. CUT RANGE: 4 inches deep; 8 3/4-in. wide at 90°, 6-in. wide at 45°; any angle 45° left, right.

SAW: 26x4-in. Kromedge® alloy-steel blade. Hollow-ground teeth, 11 pts. per inch. Hardwood handle.

SAW GUIDES: 11 1/2-in. apart, 8 steel rollers. Adjustable. Two 1 1/2-in. diam. guide rods. Hanger holds saw for 2-hand positioning of work. Release levers.

BASE: 1-pc. base, back of alum. alloy, 18-in. long. Depth stop. Clamp attaches either side of back. Offset steel legs, mounting holes. 18x10 1/4 x 14 1/4-in. **ORDER INFO:** Wt. 17 lbs.
9 GT 36303C . . . \$77.59



(14) CRAFTSMAN Lock Tape
CONSTRUCTION: Flexible steel blade. Press buttons to lock, return blade. Chrome-plated zinc case attaches to belt. 3/4-in. wide, 10-ft. long tape. Marked in inches, graduated to 1/16 inch. **ORDERING INFORMATION:** 9 GT 39213—Wt. 11 oz. . . . \$5.79

(15) CRAFTSMAN Nail-setting Tool Set. Four-piece set of heat-treated, tempered high-carbon steel. Square head with knurled body. Sizes 1/32, 2/32, 3/32, 4/32-in. Plastic storage pouch included. **ORDERING INFO:** Shpg. wt. 9 oz.
9 GT 37547 . . . Set \$3.67

(16) CRAFTSMAN Model Maker's Hammer

HEAD: 5-ounce forged steel. Curved claws. **HANDLE:** Hickory.

ORDER INFO: See warranty, p. 131. Wt. 10 oz.
9 GT 3813 . . . \$5.89

(17) Titebond® Glue
Stronger than our other white glues. Dries clear; resists heat, solvents. Sandable. **ORDER INFO:** 16-oz. bottle. Wt. 1 lb. 8 oz.
9 GT 80618 . . . \$2.47

Nail Guns drive and countersink nails in one operation



Whammer™
Nail Gun
\$14.95

(18) Whammer™ Nail Gun

CONSTRUCTION: Chrome-plated steel housing. Spring-driven mechanism. Safety lock. Snap-open nose.

ACCESSORIES: Edge-guide to help drive nails evenly, plastic pouch, instructions.

ORDER INFO: Drives 1 1/2-inch nails (sold at right). Wt. 2 lbs. 7 oz.
9 GT 6841 . . . \$14.95

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



CRAFTSMAN Electric Nailer \$69.50

(19) Electric Nailer. Ideal for cabinet work and installation of paneling, molding and window and door trim. Plenty of power at the touch of a button for penetrating hardboard paneling. V-base design allows nailing in corners and other areas where work space is restricted.

CONSTRUCTION: Vinyl base helps protect work surface from marks and dents. Touch-actuated safety lock deters accidental discharge of nails. Quick clear release for freeing jams in nailer nose. High-impact plastic housing. Rear-load magazine holds strip of 72, 18-gauge brad nails.

ELECTRICAL INFORMATION: Solid-state circuitry. 110-120-volt, 60 Hertz. AC. UL listed. 15-foot cord.

ORDERING INFORMATION: Order 1 and 1 1/4 inch brad-nails from chart below. See warranty on page 30.
9 GT 68426—Shipping weight 4 lbs. 5 oz. . . . \$69.50

Nails for (18) and (19), above. Brad-type. Package of 500. **COLORS.** **ORDER INFO:** 1, 1 1/4-in. nails fit (19) only.

Length	Color, Catalog Number				Shpg. wt.	Pkg.
	Off-white	Light wood	Med. wood	Dark wood		
For electric nailgun						
1 inch	9 GT 68452	9 GT 68453	9 GT 68454	9 GT 68455	7 oz.	\$1.14
1 1/4 in.	9 GT 68456	9 GT 68457	9 GT 68458	9 GT 68459	8 oz.	1.14
For manual nailgun						
1 1/2 in.	9 GT 68412	9 GT 68413	9 GT 68414	9 GT 68415	7 oz.	96c



Heavy-duty Pistol-grip Stapler \$114.99

(20) Standard-duty Stapler

CONSTRUCTION: Molded Lexan® plastic housing, black finish. Handle locks down. Swing-away, steel-plated base. Plastic pouch.

ORDERING INFORMATION: Order staples below. See warranty on page 30.
9 GT 6848—Shipping weight 13 oz. . . . \$5.77

Staples for standard-duty stapler. Package of 1000. 5/16-in. long, .030 diameter.
9 GT 68463—Shipping weight 5 oz. . . . Pkg. 68c

(21) Heavy-duty Pistol Grip Stapler

Drives 1/4 to 5/16-in., .050-wire staples. Tacks screening, lightweight upholstery, insulation.

CONSTRUCTION: Steel base. Nickel-plated finish. Built-in staple extractor. Pull-back base, slides open for easy loading.

ORDERING INFORMATION: See Warranty on page 30. Order extra staples below.
9 GT 6846—Wt. 1 lb. 13 oz. . . . \$11.49

Stapler Accessory Kit. Includes screen stretcher, belt hook, desk stapler adapter.
9 GT 68432—Shipping weight 7 oz. . . . \$1.56

Extra Staples for Electric Stapler at right and Manual Staplers above. .050 high-carbon steel wire, 1/2-in. wide.

LENGTH, ORDERING INFORMATION:

Long	Pkg. 1000	Wt. oz.	Price Pkg.	Pkg. 5000	Wt. lbs. oz.	Price Pkg.
1/4	Cat. No.			Cat. No.		
1/4	9 GT 68402	6	77c	9 GT 68652	1	\$3.69
5/16	9 GT 68658	7	87c	9 GT 68653	1	4.19
3/8	9 GT 68403	7	97c	9 GT 68654	1	4.69
1/2	9 GT 68404	9	\$1.07	9 GT 68656	2	5.19
5/8	9 GT 68659	9	1.17	9 GT 68657	2	5.59

CRAFTSMAN® Staplers



Heavy-duty Stapler \$17.49

(22) Heavy-duty Stapler Kit. Dual compression for extra driving power.

CONSTRUCTION: Steel. Nickel-plated finish. Built-in staple extractor. Pull-back base slides open for loading.

ACCESSORIES: 2 packs of 1,000 staples (5/8, 5/16-in.), belt hook, screen stretcher, desk adapter for stapler, molded plastic carrying case.

ORDERING INFO: See warranty, p. 30. Order staples below, left.
9 GT 68431—Wt. 3 lbs. 14 oz. . . . Kit \$17.49

Stapler alone.

9 GT 6843—Shpg. wt. 2 lbs. . . . \$13.69

(23) CRAFTSMAN Electric Stapler Kit. Reversible nose stretches screen

CONSTRUCTION: Steel base. Handle and housing of high-impact polycarbonate. Switch and safety lock. Balanced, lightweight to ease operator fatigue.

ACCESSORIES: 3 packs of 1,000 staples (1/4, 3/8, and 5/16-inch), staple remover, molded plastic case.

ELECTRICAL INFO: Solid-state circuitry. Uses 110-120-volt, 60-Hz. AC. UL listed. 6-inch pigtail, 3-wire cord.

ORDERING INFORMATION: See warranty on page 30. Order staples below, left.
9 GT 68417—Wt. 4 lbs. 5 oz. . . . Kit \$32.50

Stapler alone.

9 GT 68416—Wt. 2 lbs. 15 oz. . . . \$24.50

With Sears Clamps and Vises, it's almost like having an extra hand


Vises give you holding power when cutting threads, drilling, sawing or any other job where steady support is needed



CRAFTSMAN®
Woodworking Vise
... slide jaw open and closed, tighten with a twist

CONSTRUCTION: Meets Federal Specifications GGG-V-445a for strength. Fits 2 1/4-inch thick bench with 1/8-inch top clearance. Imported. Body, Jaws: Cast gray iron, red finish. Steel guide rods keep vise aligned, steel drag bar. Retractable dog acts as bench stop. 12-inch capacity. Jaw faces, 4x10 inches. . . . predrilled holes for attaching wood faces (not included). Screw and Handle: Steel screw. Continuous 180° thread screw. Quick action closing lets you slide vise closed, then tighten with a turn of the hardwood handle. . . . reverse action to open.

ORDERING INFORMATION:
9 GT 5195C—Shipping weight 39 pounds\$58.19

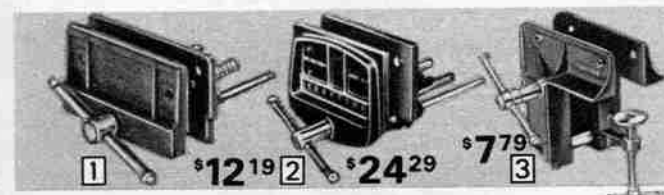

(1) 4 1/2-in. cap. Vise
CONST: Fits 2 1/4 in. thick bench, 1/8 in. top clearance. Imported. Body, Jaws: Semi-steel jaws measure 2 1/2x6 1/2 inches. Red finish. Steel guide rods. 4 1/2-in. cap. Pre-drilled holes in jaw faces for easy mounting of wood faces (not incl.). Screw and Handle: Steel screw. Ball ended steel handle.
ORDERING INFORMATION:
Not Craftsman.
Wt. 6 lbs. 6 oz.
9 GT 5190 ..\$12.19

(2) CRAFTSMAN 7-in. cap. Vise
CONST: Fits 2 1/4-in. thick bench, 1/8-in. top clearance. Imported. Body, Jaws: Cast gray iron, red finish. Steel guide rods keep alignment. 7-in. cap. jaws. Jaw faces 4x7 in. wide. Pre-drilled screw holes for attaching wood faces (not incl.). Screw and Handle: Steel screw. Ball-ended steel handle.
ORDERING INFORMATION:
Wt. 12 lbs. 8 oz.
9 GT 5191 ..\$24.29

(3) CRAFTSMAN Portable Vise, 2 1/4-in. capacity
CONST: Fits bench 7/8 to 2 1/4 inches thick. Body, Jaws: Alum., gray finish. 2 3/4-in. cap. "L" shaped jaws useful for clamping doors upright to bench for planing. Jaws 5 1/2x5 1/2 in. Pre-drilled holes for fastening wood faces (not incl.). Screw, Handle: Steel screw and handle.
ORDERING INFORMATION:
Wt. 2 lbs. 1 oz.
9 GT 5202 ..\$7.79

With Sears Glue Guns you can bond porous and nonporous materials



\$13.97

\$7.97

(13) Heavy-duty Glue Gun
CONSTRUCTION: Preset thermostat. Heat resistant phenolic handle with trigger control. 8x2 1/4x7 inches high.
GLUE: Three 4-inch sticks. Bonds in just 1 minute.
ELEC INFO: 110-120-v., 60-Hz. AC. 160 w. UL listed. 6-foot cord.
ORDER INFO: Wt. 1 lb. 13 oz.
9 GT 80524\$13.97

Extra Nozzles for (13) above
CONSTRUCTION: Brass with steel head assemblies.
ORDERING INFORMATION:
1/4-in. bead. Shpg. wt. 3 oz.
9 GT 80528\$1.97
1/8-in. bead. Shpg. wt. 3 oz.
9 GT 80527\$1.97

Extra Glue Sticks for (13) above
Package of 6. Shpg. wt. 5 oz.
9 GT 80525Pkg. \$1.47
Pkg. of 40. Shpg. wt. 1 lb. 4 oz.
9 GT 80529Pkg. \$4.97

(14) Medium-duty Glue Gun
CONSTR: Pressure on nozzle controls flow. Heat-resistant plastic handle.
GLUE: Four 2 1/2-inch sticks. 3 sealer sticks for waterproof caulking. 90% bond strength in 1 minute. Measures 4 1/2x2 1/4x5 inches high.
ELECTRICAL INFO: 110-120-volt, 60 Hz. AC. 65 watts. UL listed. 6-ft. cord.
ORDERING INFORMATION: Shipping weight 1 lb. 4 oz.
9 GT 80514\$7.97

Glue Sticks for (14) above
ORDERING INFORMATION: Box of 60. Shpg. wt. 14 oz.
9 GT 80517Box \$3.67

Sealer Sticks for (14) above
ORDERING INFORMATION: Pkg. of 14. Shpg. wt. 5 oz.
9 GT 80518Pkg. \$1.17

(15) Tite-bond® Glue. Stronger than our white glues. Dries clear, sets quickly, spreads easily. Sandable. For woodworking and other uses.


Catalog Number	Size oz.	Shpg. wt. lbs. oz.	Each
9 GT 80617	8	1	\$1.57
9 GT 80618	16	1	2.47
9 GT 80621	32	2	3.77

(16) Contact Cement. Chlorinated, non-flammable. No clamping. For porous, nonporous goods.

Catalog Number	Size oz.	Shpg. wt. lbs. oz.	Each
9 GT 80656	16	1	\$2.67
9 GT 80657	32	2	4.37

(17) Hide Glue. For cabinet making, wood, fabric, leather or cardboard.

Catalog Number	Size oz.	Shipping weight	Each
9 GT 80622	4	9 ounces	\$1.17
9 GT 80623	8	14 ounces	1.99

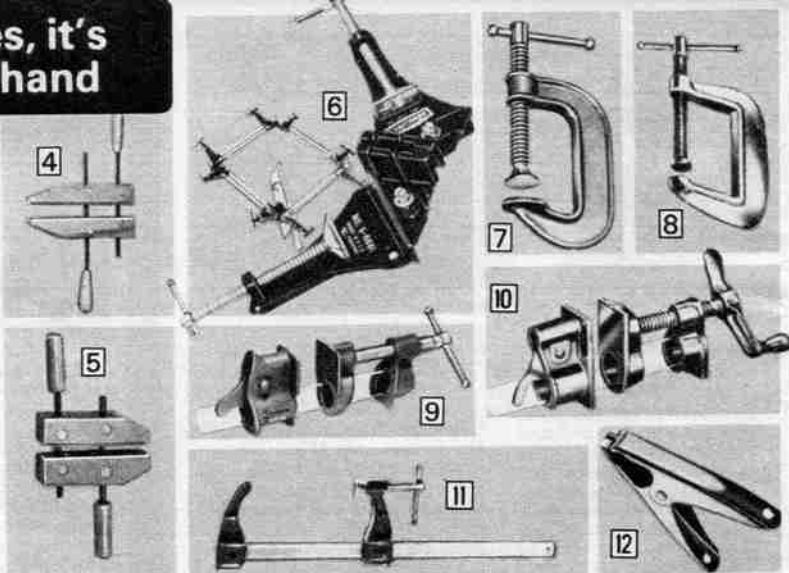

(4) CRAFTSMAN Adjustable Gluing Clamps. Selected hardwood jaws.

Catalog No.	Opens to	Shpg. wt.	Each
9 GT 66638	8 inches	3 lbs. 15 oz.	\$8.79
9 GT 66639	10 inches	5 lbs. 2 oz.	9.69

(5) CRAFTSMAN Polycast Adjustable Gluing Clamps. High-impact plastic for durability.

Catalog Number	Opens to	Shpg. wt. lbs. oz.	Each
9 GT 66631	2 in.	10	\$4.99
9 GT 66632	4 in.	7	6.99

(6) CRAFTSMAN Corner and Miter-box Clamp Set. Holds pieces up to 3 in. wide. Holes for fastening to work surface. Includes 3 corner clamps, 1 miter-box clamp. Aluminum alloy.
ORDERING INFO: Wt. 2 lbs. 13 oz.
9 GT 66614Set \$12.59

Corner Clamps alone. 3 needed with miter-box clamp sold sep. below.
ORDERING INFORMATION: Wt. 12 oz.
9 GT 6666Each \$3.39

Miter-box Clamp alone. Guides saw for precise 45° angle cutting. Fits any back or hand saw.
ORDERING INFO: Wt. 1 lb. 2 oz.
9 GT 6661\$4.39

(7) CRAFTSMAN® Standard Malleable-iron "C" Clamp. Plated steel screw; sliding handle. For gluing, sawing, welding.

Catalog Number	Opens to	Throat depth	Wt. lbs. oz.	Each
9 GT 66671	1 in.	1 in.	4	99c
9 GT 66672	2 in.	1 1/8 in.	7	\$1.39
9 GT 66673	3 in.	1 1/4 in.	15	2.59
9 GT 66674	4 in.	2 in.	2	4.39
9 GT 66675	5 in.	2 1/2 in.	2	5.39
9 GT 66676	6 in.	2 3/4 in.	2	6.59
9 GT 66678	8 in.	3 1/4 in.	4	8.59

CRAFTSMAN Deep-throat "C" Clamps (not shown). Pearlite iron frame.

Catalog Number	Opens to	Throat depth	Wt. lbs. oz.	Each
9 GT 66681	1 in.	3 in.	8	\$1.99
9 GT 66682	2 1/2 in.	4 1/2 in.	1	7 3.89
9 GT 66684	4 in.	5 in.	2	12 6.79

(8) CRAFTSMAN Aluminum Alloy "C" Clamps. Steel screw, sliding handle.

Catalog Number	Opens to	Throat depth	Shpg. wt. lbs. oz.	Each
9 GT 66701	1 in.	1 in.	3 oz.	\$1.29
9 GT 66702	2 in.	1 1/8 in.	5 oz.	1.59
9 GT 66703	3 in.	1 1/4 in.	10 oz.	2.49
9 GT 66704	4 in.	2 in.	1 lb.	3.89

(9 and 10) Pipe Clamps. Save 10% when you buy any 2 or more. Use with threaded pipe for gluing extra-long workpieces (pipe not included). 2-piece sets.

(9) Sears Clamp fits 1/2-in. pipe. Jaw face 1 1/4x1 1/2 in. T-handle. Imported.
ORDER INFO: Shpg. wt. each set 15 oz.
9 GT 6675Set \$5.29
2 sets for9.52

(10) CRAFTSMAN Clamp fits 3/4-in. pipe. Jaw face 1 3/4x1 3/4 in. Spin-neck handle.
ORDER INFO: Wt. each set 2 lbs. 11 oz.
9 GT 6674Set \$6.79
2 sets for12.22

(11) CRAFTSMAN Bar Clamp. Iron clamps with 1/4x3/4x24 in. steel bar.
ORDER INFO: Shipping weight 3 lbs.
9 GT 6663C\$7.79

(12) CRAFTSMAN Spring Clamps. Zinc-plated steel, spring tension action.

Catalog No.	Opens to	Length	Shpg. wt.	Each
9 GT 66697	1 in.	4 in.	4 oz.	79c
9 GT 66698	2 in.	6 in.	9 oz.	\$1.49
9 GT 66699	3 in.	9 in.	1 lb. 1 oz.	2.49




Our best CRAFTSMAN® Miter Boxes are both accuracy tested to within .005 of an inch on 6-inch cuts

- Kromedge® saw blades of chrome-plated, alloy steel give long-lasting sharpness
- Hangers hold saw out of the way so your hands are free to position workpiece
- Clamps with exclusive design hold workpiece snug against the back

\$106⁹⁵

Our finest Miter Box has a 28x5-in. saw with Kromedge® blade

- (A) Tap-cap saw release, tap the caps to release saw quickly
(B) Easy take-down guide rods slip back in, hold their accuracy

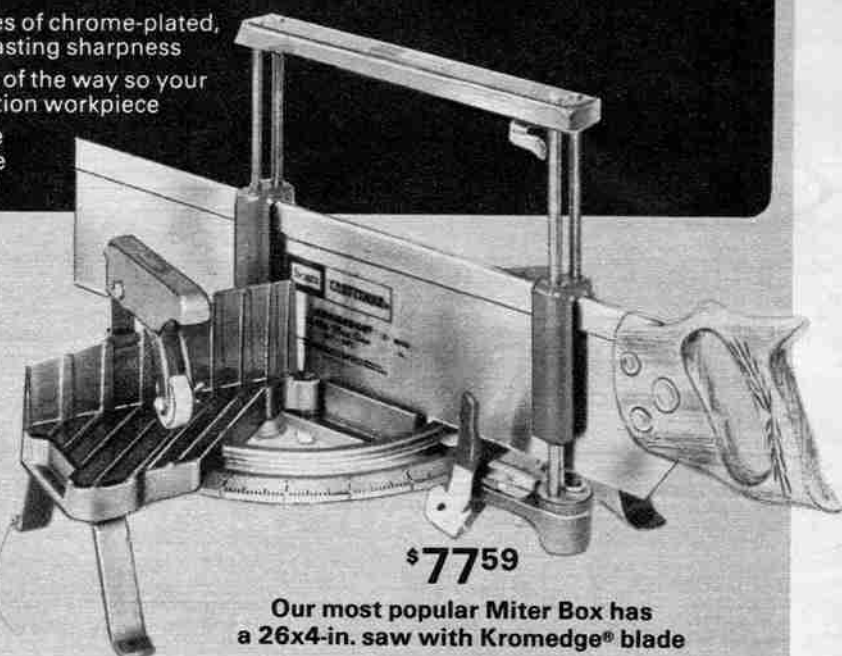

\$77⁵⁹

Our most popular Miter Box has a 26x4-in. saw with Kromedge® blade

CUTTING RANGE: Maximum depth 5 inches. Takes pieces to 8¾ inches wide at 90°, 6 inches wide at 45°. Cuts any angle 45° left or right.

SAW: 28x5-inch Kromedge® alloy-steel blade. Hollow-ground teeth, 11 points per inch for fine cuts. Chrome-plated for rust resistance. Hardwood handle.

SAW GUIDES: 11½ inches apart with 10 steel rollers. Adjust to any saw thickness. Factory tested for accuracy. Two ¾-inch half-round rods support guides . . . loosen screws to remove. Hanger holds saw . . . allows 2-hand positioning of work. Tap caps let you release saw quickly.

BASE: 1-piece base, back of aluminum alloy. Depth stop protects saw teeth. Our exclusive clamp attaches on left or right side of back . . . foot fits various wood shapes to secure workpiece. Offset, cast aluminum legs widely spaced for stability. Mounting holes for fastening to workbench. 18x12¼x17¼ in. high.

ORDERING INFORMATION: Shipping weight 27 pounds.

9 GT 36505C \$106.95

CUTTING RANGE: Maximum depth 4 inches. Takes pieces to 8¾ inches wide at 90°, 6 inches wide at 45°. Cuts any angle 45° left or right.


SAW: 26x4-inch Kromedge® alloy-steel blade. Hollow-ground teeth, 11 points per inch for fine cuts. Chrome-plated for rust resistance. Hardwood handle.

SAW GUIDES: 11½ inches apart with 8 steel rollers. Adjust to any saw thickness. Factory tested for accuracy. Two 1½-inch diameter guide rods. Hanger holds saw . . . allows for 2-hand positioning of work. Turn 2 levers to release saw.

BASE: Rugged 1-piece base and back of aluminum alloy. Depth stop helps protect saw teeth. Our exclusive clamp attaches on the left or right side of back . . . foot fits various wood shapes to secure workpiece. Offset steel legs are widely spaced for stability. Mounting holes for fastening to workbench. Measures 18x10¼x14¼ inches high overall.

ORDERING INFORMATION: Shipping weight 17 pounds.

9 GT 36303C \$77.59

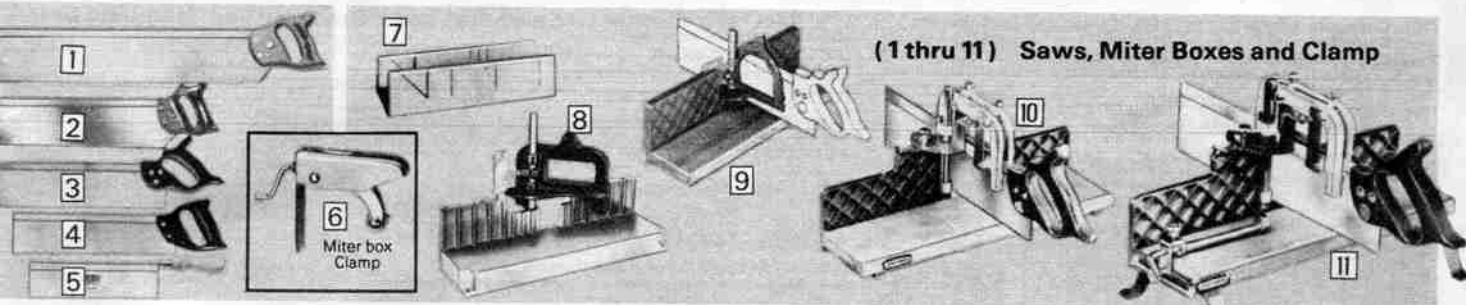

(1 thru 11) Saws, Miter Boxes and Clamp

(1 thru 3) CRAFTSMAN Back or Miter Saws

BLADE: Kromedge® alloy-steel with bevel-filled, hollow-ground teeth, 11 points per inch for fine cuts. Braced back.

HANDLE: Hardwood, comfort-contoured grip.

ORDERING INFO:

(1) 28x5-inch Blade
Shpg. wt. 6 lbs.
9 GT 36185C . . . \$19.39

(2) 26x4-inch blade
Shpg. wt. 5 lbs.
9 GT 36184C . . . \$17.49

(3) 16x3½-inch blade
Shpg. wt. 1 lb. 13 oz.
9 GT 36183 . . . \$9.99

(4) Back Saw

BLADE: 14x3¼-inch steel with 11 points per inch. Braced back for extra strength.

HANDLE: Plastic.

ORDER INFO: Not Craftsman. Shpg. wt. 1 lb. 3 oz.
9 GT 36182 . . . \$2.89

(5) CRAFTSMAN Hobby Saw

Use with miter boxes or alone for model making and other crafts.

BLADE: Measures 10 inches long. Made of Kromedge® alloy-steel, 12 points per inch for fine cuts. Braced back.

HANDLE: Hardwood.

ORDERING INFO:

Shpg. wt. 12 oz.
9 GT 36181 . . . \$3.89

(6) Miter-box Clamp

Designed to hold workpieces in most types of miter boxes. Also handles same types of jobs as "C" clamps.

CONSTRUCTION: Steel with non-marring wood or polyurethane faces. Bracket for permanently fixing to fence. Screw action holds workpiece firmly in place.

ORDERING INFO:

Shipping wt. 1 lb. 9 oz.
9 GT 66662 . . . \$3.89

(7) Polystyrene Miter Box

CUTTING RANGE: 3 in. deep, 2¼ in. wide. For cuts 90°, 45° left or right, 45° diagonal.

BASE: High-impact molded polystyrene resists warping. Overall: 14x5x3¾ in. high.

ORDERING INFORMATION:

Saw is not included.
Shipping weight 2 lbs. 6 oz.
9 GT 36323 . . . \$3.89

(8) CRAFTSMAN Miter Box with saw guide and plastic base

CUTTING RANGE: 4 in. deep, 4 in. wide. Cuts any angle 45° left or right.

SAW GUIDE: Free-floating. Adjusts to any saw thickness.

BASE: High-impact plastic back and base. Pre-cut notches for securing to workbench. Measures 16x9½x5 in.

ORDERING INFORMATION: Saw is not included.

Shipping wt. 5 lbs. 5 oz.
9 GT 36327 . . . \$12.59

(9) CRAFTSMAN Miter Box with saw guide and hardwood base

CUTTING RANGE: 3 in. deep, 4¾ in. wide. Cuts any angle 45° left or right.

SAW GUIDE: Free-floating. Adjusts to any saw thickness.

BASE: Cast aluminum-alloy back, hardwood base. 17¾x8x7½ in.

ORDER INFO: Saw not included.

Shipping weight 5 lbs. 5 oz.
9 GT 3634 . . . \$16.49

(10) CRAFTSMAN Miter Box with saw guide, hardwood base and 16x3½-inch saw

CUTTING RANGE: 3½ in. deep, 4¾ in. wide. Cuts any angle 45° left or right for added versatility.

SAW: 16x3½-in. Kromedge® alloy-steel blade. Hollow-ground teeth with 11 points per inch. Hardwood handle.

GUIDE: Adjusts to any saw thickness.

BASE: Cast aluminum-alloy back, hardwood base. Measures 17¾x7x8½ inches.

ORDERING INFORMATION: Shpg. wt. 7 lbs. 2 oz.
9 GT 36329 . . . \$32.99

Miter Box (10) without saw
9 GT 3632—Wt. 5 lbs. 5 oz. . \$23.99

(11) CRAFTSMAN® all metal Miter box with saw guides

Workpiece clamp and 16x3½-in. saw **\$43⁶⁹**

CUTTING RANGE: 3½ inches deep, 3¾ inches wide. Cuts any angle 45° left or right.

SAW: 16x3½-inch Kromedge® alloy-steel blade. Hollow-ground teeth, 11 points per inch. Hardwood handle.


SAW GUIDE: Adjusts to any saw thickness for accurate cuts.

BASE: Cast aluminum-alloy back and base. Replaceable cutting board. Legs with mounting holes widely spaced for stability. Adjustable workpiece clamp/length gauge to secure wood to back. Measures 19x9½x11 inches high.

ORDERING INFORMATION:

Shipping weight 10 pounds.
9 GT 36322 . . . \$43.69

Here and on the next 5 pages...
a wide variety of specialty tools and
items to help complete your home workshop

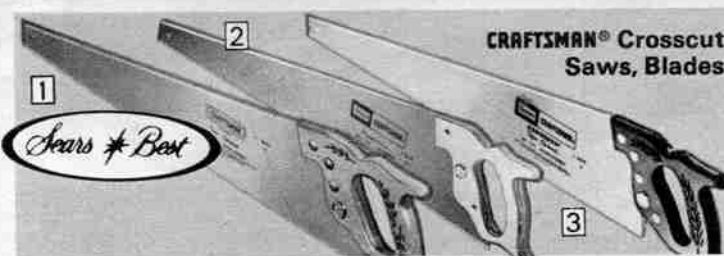

(1) CRAFTSMAN Taper-ground Bevel-filed Saw
Chrome-nickel alloy steel blade with Kromedge® finish, vinyl guard. Hardwood handle.
CUT, ORDERING INFO: Shpg. wt. 2 lbs.

Catalog Number	Points per in.	Price
9 GT 36153C	8	\$11.69
9 GT 36154C	10	11.69

(2) CRAFTSMAN Flat-ground Bevel-filed Saw
Hardened, tempered, Kromedge® carbon-steel blade. Vinyl blade guard. Hardwood handle.
CUT, ORDERING INFO: Shpg. wt. 2 lbs.

Catalog Number	Points per in.	Length	Price
9 GT 36144C	8	26 in.	\$8.79
9 GT 36145C	10	26 in.	8.79
9 GT 36141L†	12	22 in.	7.79

†11 mailed, takes 15-lb. rate. See Parcel Post Info., p. 69.

(3) CRAFTSMAN Taper-ground Bevel-filed Saw
Sears Best

Chrome-nickel-moly alloy steel blade with Kromedge® finish. Taper-ground blades reduce friction and binding. Bevel-filed teeth. Vinyl blade guard. Hardwood handle, walnut-stained and lacquer-finished.

ORDERING INFORMATION: Warranty, page 112.

For coarse cuts, 8 points per inch.
Shipping weight 2 lbs.

9 GT 36193C \$14.59

For fine cuts, 10 points per inch.
Shipping weight 2 lbs.

9 GT 36194C \$14.59

Specialty Saws, Blades

(4) Coping Saw

Cadmium-plated steel head with 3-inch throat depth. Includes 6½-in. blade with 15 teeth per inch. Takes pin-end coping blades at right. Hardwood handle.

ORDERING INFO: Not Craftsman.
Shipping weight 8 oz.
9 GT 35363 \$1.79

(5) CRAFTSMAN Coping Saw

6¼-in. throat depth. Includes steel 6½-in. pin-end blade with 15 teeth per inch. Uses pin-end blades at right or lock loop-end blades. Hardwood handle.

ORDERING INFO: Shipping weight 12 oz.
9 GT 3541 \$2.89

Pin-end Coping Saw Steel Blades (not shown).

Measures 6½-in. long. CUT, ORDERING INFORMATION: Package of 3.

With 15 teeth per in. Shpg. wt. 3 oz.

9 GT 3544 Pkg. 69c

With one each 10, 15, 20 teeth per in. Shpg. wt. 3 oz.

9 GT 3543 Pkg. 69c

(6) CRAFTSMAN Keyhole Saw

Kromedge® steel blade measures 10 inches long, 10 teeth per inch. Plastic handle with patented slot lock.

ORDERING INFO: Shpg. wt. 8 oz.
9 GT 35191 \$2.89

(7) CRAFTSMAN Nest of Saws. With 3 tempered steel blades: 12-in. wood cutting, 7 teeth per in.; 6-in. multi-purpose, 10 teeth per in.; 8½-in. metal cutting, 24 teeth per in. Die-cast alum. handle, adj. lock.

ORDER INFO: Wt. 14 oz.
9 GT 3513 Set \$4.89

(8) CRAFTSMAN 30-in. Bow Saw. Tubular steel frame. Shpg. wt. 3 oz.
9GT49232C \$5.49

Extra Blade for (8). Imported.
9GT48931—Wt. 6 oz. \$2.59


(9) CRAFTSMAN Pruning Saw. Steel blade 24 in. long. Tubular steel frame with tension lever. Imported.

Shpg. wt. 1 lb. 6 oz.

9 GT 4904 \$4.79

Blade for (9). Imported.

9 GT 4905—Wt. 4 oz. \$2.49

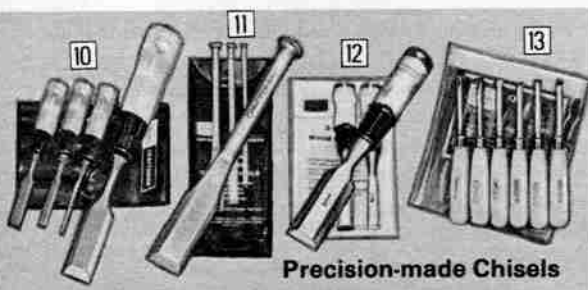

Precision-made Chisels

(10) Craftsman 4-piece Chisel Set

Precision-ground high-carbon steel blades, hammer-forged, heat-treated. Butyrate Tenite II handles. With striking cap. Sizes: ¼, ½, ¾, 1-inch wide. Plastic pouch.

ORDERING INFORMATION: Shpg. wt. 1 lb. 9 oz. See Warranty, page 112.

Set, prices total \$16.48.

9 GT 36826 Set \$14.97

Individual Chisels as (10)

Catalog Number	Width in.	Shpg. Wt.	Each
9GT36821	¼	6 oz.	\$3.77
9GT36822	½	7 oz.	3.97
9GT36823	¾	8 oz.	4.27
9GT36824	1	9 oz.	4.47
9GT36825	1½	9 oz.	4.77

(12) 3-piece Chisel Set

Drop-forged, heat-treated high carbon steel blades. Vinyl covered plastic handles. Sizes: ½, ¾, 1-in. wide. Pouch. Imported.

ORDERING INFORMATION: 9 GT 36891—Shipping weight 1 pound Set \$5.97

(13) Craftsman 6-piece Carving Chisel Set

Austempered, forged alloy steel blades. Precision-ground bevels, cutting edge. Hardwood handles, 6 chisels: straight blade, bent blade, bent gouge, skew bevel, "U" tool, veining tool. Plastic pouch. Imported.

ORDERING INFORMATION: 9 GT 3685—Shipping weight 12 ounces Set \$12.59

(11) Craftsman 4-pc. Chisel Set

Drop-forged high-carbon steel, hardened, tempered, nickel chrome-plated. With striking head, pouch. Sizes: ¼, ½, ¾, 1-inch wide.

ORDERING INFORMATION: Shpg. wt. 1 lb. 13 oz.

9 GT 36838 Set \$12.47

Individual Chisels as (11)

Save 5% when you buy any two or more chisels below.

Catalog Number	Width in.	Wt. lbs. oz.	Each	2 or more, each
9 GT 36832	¼	5	\$2.97	\$2.82
9 GT 36833	½	6	3.17	3.01
9 GT 36834	¾	7	3.37	3.20
9 GT 36835	1	12	3.67	3.48
9 GT 36836	1½	15	3.97	3.77
9 GT 36837	2	5	5.27	5.00

*2½-inch size is double-beveled



Nail Pullers, Wrecking Bars

(14) Tack Puller. Steel construction with a vinyl grip.

ORDERING INFORMATION: 9 GT 3810—Shpg. wt. 4 oz. 89c

(15) CRAFTSMAN 12-in. Nail Puller. Steel jaw construction.

ORDERING INFO: Wt. 1 lb. 7 oz.
9 GT 6595 \$4.19

(16) 18-inch Nail Puller. Steel jaw construction.

ORDERING INFO: Wt. 5 lbs. 6 oz.
9 GT 6593 \$11.69

(17) CRAFTSMAN Pull-n-Pry Bars. Made of tempered steel.

SIZES, ORDERING INFORMATION: 2x15 inches long. Wt. 1 lb. 12 oz.

9 GT 6591 \$5.39

5x5½ inches long. 9 GT 6594—Wt. 5 oz. 1.29

(18) CRAFTSMAN Wrecking Bars

SIZES, ORDERING INFORMATION: 3½x24 inches long. Steel.

9 GT 6597C—Wt. 4 lbs. \$5.89

3½x30 inches long. Steel.

9 GT 65981C—Wt. 5 lbs. 6.29

(19) CRAFTSMAN Rip Bar

Steel. ½x18 inches long. ORDER INFO: Wt. 2 lbs. 11 oz.

9 GT 6577 \$5.39



Sawhorse Legs, Brackets and Stamping Sets

(20) Fully mechanical Sawhorse Legs

Withstand a load of 1500 lbs.

CONSTRUCTION: Made of heavy-duty steel. Self-locking braces. Jaws will adjust to cross piece and hold it securely. No tools required to assemble. Enamel finish.

ORDERING INFORMATION: Shpg. wt. 8 lbs.

9 GT 28884C \$7.29

(21 and 22) Sawhorse Brackets

Hinged steel. Enamel finish. Fits new 2x4's (1½x3½-inch, not included).

(21) Heavy-duty Brackets

No nailing. 6¼x3½x7 inches long. Package of two.

ORDERING INFORMATION: Shpg. wt. 5 lbs. 5 oz.

9 GT 28871 Pkg. \$5.69

(22) Medium-duty Brackets

Flanged nail holes. 6¼x3½x4 inches long. Pkg. of 2.

ORDERING INFORMATION: Shpg. wt. 2 lbs. 5 oz.

9 GT 28872 Pkg. \$3.39

(23) Letter Sets. Steel. Marks permanently on leather, plastic, wood, metal for identification or design purposes. A to Z. period. Wooden box included.

SIZES, ORDERING INFO: ½-inch. Wt. 1 lb. 12 oz.

9 GT 37924 Set \$12.89

¾-inch. Wt. 2 lbs. 11 oz.

9 GT 37925 Set \$15.89

1-inch. Wt. 3 lbs. 4 oz.

9 GT 37926 Set \$18.89

(24) Number Sets. Made of steel. Marks permanently on leather, plastic, wood, metal. Numbers 0 to 9. No period. Wooden box included.

SIZES, ORDERING INFO: ½-in. Wt. 15 oz.

9 GT 37912 Set \$4.89

¾-in. Wt. 1 lb. 5 oz.

9 GT 37913 Set \$5.89

1-inch. Wt. 1 lb. 2 oz.

9 GT 37914 Set \$6.89

(25) Craftsman Nail-setting Tool Set. 4-piece set of heat-treated, tempered high-carbon tool steel. Square head with knurled body. Sizes: ½, ¾, 1, 1½.

ORDERING INFORMATION: Shpg. wt. 4 oz. per pkg.

9GT37502 1 in. 12 \$1.29

9GT37504 1½ in. 10 1.29

9GT37505 2 in. 9 1.29

9GT37508 2½ in. 8 1.29

9GT37509 3 in. 7 1.29

Electric Space Heaters



(26) Heater/Fan with 2 settings for up to 5120 BTU's

CONTROL: Top mounted. 750 w. for 2550 BTU's; 1500 w. for 5120 BTU's. Thermostatically controlled. Positive off; heat limit switch. CABINET: Red-orange steel. Adjustable base. 9½x9x6¼ in. high. ELECTRICAL INFORMATION: UL listed; 110-120-volt, 60-Hz. Ac. 750 watts and 1500 watts. 6-ft. cord.

ORDERING INFORMATION: See Warranty on page 83.

34 GT 7258—Shipping weight 5 pounds 13 ounces \$24.49

(27) Heater with 2 settings for up to 5120 BTU's

CONTROL: Front mounted. 1250 watts for 4260 BTU's; 1500 watts for 5120 BTU's. Thermostatically controlled. Positive off, tipover safety switch and heat limit switch. CABINET: Tan-color enameled steel; metal grill. 10x6½x14½ in. ELECTRICAL INFORMATION: UL listed; 110-120-volt, 60-Hz. Ac. 1250 watts and 1500 watts. 6-ft. cord.

ORDERING INFORMATION: See Warranty on page 83.

34 GT 7242—Shipping weight 12 pounds 10 ounces \$24.99

Stud Driver and Studs

(28) Steel Stud Driver

Fasten furring strips, shelving, conduits to brick, concrete and cinder blocks. Set in concrete with 2-lb. or larger hammer. Use with steel drive studs (29) at right.

ORDER INFO: Wt. 1 lb. 4 oz.

9 GT 3571 \$5.59

(29) Steel Drive Studs

For use with Steel Stud Driver (28), shown at left. Austempered steel with washer. ORDERING INFORMATION: Shpg. wt. 4 oz. per pkg.

Catalog Number	Shank Length	Pkg. of	Price Pkg.
9GT35702	1 in.	12	\$1.29
9GT35704	1½ in.	10	1.29
9GT35705	2 in.	9	1.29
9GT35708	2½ in.	8	1.29
9GT35709	3 in.	7	1.29





(1 and 2) CRAFTSMAN® Ball-pein Hammers

HEAD: Drop-forged heat-treated steel head for strength. Machined face and pein. Face crowned and beveled to help prevent chipping. Head epoxy-bonded to handle, held tight with steel wedge.

(1) With fiber glass handle

HANDLE: Fiber glass... stronger than wood handles. Neoprene grip with chevron pattern. SIZE AND ORDERING INFORMATION: See warranty page 112.

Catalog No.	Head	Shpg. wt.	Price
9 GT 38475	24 oz., 2 lbs. 6 oz.	6 oz.	\$9.29
9 GT 38476	32 oz., 2 lbs. 12 oz.	9 oz.	9.69

(2) With hickory handle

HANDLE: Select hickory. SIZE AND ORDERING INFORMATION: See warranty page 112.

Catalog No.	Head	Shpg. wt.	Price
9 GT 38461	4 oz., 10 oz.	4 oz.	\$4.89
9 GT 38463	8 oz., 15 oz.	5.39	
9 GT 38464	12 oz., 1 lb. 4 oz.	5.89	
9 GT 38465	16 oz., 1 lb. 8 oz.	6.29	
9 GT 38466	24 oz., 2 lbs. 3 oz.	6.79	
9 GT 38467	32 oz., 2 lbs. 11 oz.	7.29	

(3 thru 6) CRAFTSMAN® Nail Hammers with our finest head

HEAD: Triple-zoned drop-forged steel head for strength and durability. Machined face. Beveled crown to reduce chipping. Steel ribs under each claw for extra strength. Third claw to pull nails from tight spots on 13-ounce and 16-ounce heads.

(3) With fiber glass handle. More shock-absorbent than steel. Locked in place with 3,000 pounds of hydraulic pressure. Parallel fiber glass stands for strength. Hollow core for balance. Neoprene grip resists oil and grease... with chevron perforations for firm grasp. CLAW: SIZE AND ORDERING INFORMATION: See warranty page 112.

With curved claw, 16-oz. head. Shipping weight 1 lb. 13 oz. 9 GT 3820... \$10.19

Sears best with curved claw, 13-oz. head. Shipping weight 1 lb. 9 oz. 9 GT 3822... \$10.19

With straight claw, 16-oz. head. Shipping weight 1 lb. 13 oz. 9 GT 3821... \$10.19

With straight claw, 20-oz. head plus milled face. Resists slipping on impact so nail goes in straight. No third claw. Shipping weight 2 lbs. 6 oz. 9 GT 3823... \$12.19

(4) With tubular steel handle

Stronger than hickory, more shock-absorbent than solid steel. Hickory plug absorbs vibrations. Perforated neoprene grip resists oil, grease. Slip-resistant grasp. Sears best. CLAW: Curved. SIZE: 16-ounce head. ORDERING INFORMATION: See warranty page 112. Shipping weight 1 lb. 13 oz. 9 GT 3836... \$10.19

(5) With solid steel handle. Drop-forged, tempered for strength. Hickory plug helps cut vibrations. Perforated neoprene grip resists oil... helps resist slipping. Grip bonded to I-beam shaped handle. CLAW, SIZE, ORDERING INFO: See warranty page 112.

Sears best with curved claw, 16-oz. head. Shipping weight 1 lb. 12 oz. 9 GT 3825... \$10.29

With straight claw, 20-oz. head. No third claw. Shpg. wt. 2 lbs. 6 oz. 9 GT 38273... \$11.69

(6) With select hickory handle

Most shock-absorbent handle we sell. Reinforced at neck with steel shield (except 9 HT 38095) to protect handle on overstrikes. CLAW, SIZE AND ORDERING INFORMATION: See warranty page 112.

Sears best with curved claw and 16-oz. head. Shpg. wt. 1 lb. 11 oz. 9 GT 38141... \$8.79

With straight claw and 16-oz. head. Shpg. wt. 1 lb. 12 oz. 9 GT 3816... \$8.79

With straight claw, 20-oz. head. Like hammers described above, except no shield, third claw or ribs under claw. Shpg. wt. 2 lbs. 2 oz. 9 GT 38095... \$9.19

Nail Hammers


(7) With hickory handle HEAD: Drop-forged steel with curved claws. 16-oz. HANDLE: Double steel-wedged hickory.

ORDER INFO: Wt. 1 lb. 9 oz. Craftsman. Beveled claws. See warranty page 112. 9 GT 3818... \$6.29

Not Craftsman. 9 GT 38081... 2.27

(8) With steel handle HEAD: 16-oz. drop-forged steel. Curved claws. HANDLE: Tubular steel with neoprene grip. ORDERING INFO: See warranty page 112. Imported. Wt. 1 lb. 14 oz. 9 GT 3812... \$4.89

(9) CRAFTSMAN Model Maker's Hammer HEAD: 5-oz. forged steel. Curved claws. HANDLE: Hickory. ORDER INFO: Wt. 10 oz. See warranty page 112. 9 GT 3813... \$5.89

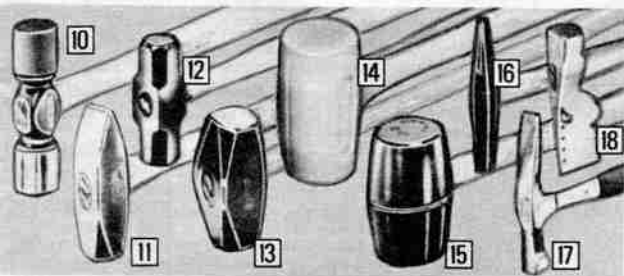

Hammers, Sledges and Mallet

(10) CRAFTSMAN Plastic-tip Hammer

HEAD: Forged steel core with 1 plastic tip, 1 vinyl tip to help prevent marking surfaces. HANDLE: Hickory. SIZE, ORDER INFORMATION: Warranty on page 112.

Catalog No.	Head	Shipping wt.	Each
9 GT 38291	6 oz., 11 oz.	11 oz.	\$5.89
9 GT 38292	12 oz., 1 lb. 5 oz.	5 oz.	6.79

(11) CRAFTSMAN Heavy-duty Hammer

HEAD: Drop-forged tempered steel. HANDLE: Select hickory. SIZES, ORDER INFORMATION: See warranty on page 112.

Catalog No.	Head	Shipping wt.	Each
9 GT 38262	2 1/2 lbs., 3 lbs. 4 oz.	4 oz.	\$8.79
9 GT 38263	3 lbs., 3 lbs. 14 oz.	14 oz.	9.29

(12) CRAFTSMAN Sledges

HEAD: Double-faced... steel. HANDLE: Select hickory. SIZES, ORDERING INFORMATION: See warranty on page 112.

With 4-lb. head, 15-in. handle. Drop forged head. 9 GT 50751—Wt. 4 lbs. 10 oz. \$11.69

With 8 lb. head, 32-in. handle. Drop-forged head. 9 GT 50752C—Wt. 10 lbs. \$15.49

With 10-lb. head, 34-in. handle. Hand-forged head. 9 GT 50754C—Wt. 12 lbs. \$18.49

(14) Dead Blow Hammers

CONSTRUCTION: 1-piece uni-cast steel, rubber grip handle. SIZES, ORDER INFORMATION: Warranty on page 112.

Catalog Number	Shipping weight	Price
9GT38312	1 lb.	\$7.99
9GT38313	1 lb. 10 oz.	9.99
9GT38314	2 lbs. 2 oz.	12.99
9GT38315	3 lbs. 2 oz.	16.99
9GT38316	4 lbs. 2 oz.	24.99
9GT38317	7 lbs. 2 oz.	34.99
9GT38318C	12 lbs.	59.99

(15) CRAFTSMAN Rubber Mallet

HEAD: Non-marring rubber construction. Weighs 16 ounces. HANDLE: Hickory. ORDER INFO: Warranty on page 112. 9 GT 4578—Wt. 1 lb. 8 oz. \$4.89

(16) Tack Hammer

HEAD: 5-oz. forged steel. One magnetized face holds tacks. HANDLE: Straight-grained hickory. ORDER INFO: Warranty on page 112. 9 GT 3802—Wt. 10 oz. \$3.19

(17) CRAFTSMAN Bricklayer's Hammer

HEAD: 16-oz. forged steel. HANDLE: Steel with neoprene grip... non-slipping and it resists oil and grease. ORDER INFO: Warranty on page 112. 9 GT 6544—Wt. 1 lb. 14 oz. \$10.69

(18) CRAFTSMAN Shingle Hammer

HEAD: Drop-forged steel. HANDLE: Hickory. 12 1/4 in. long. ORDER INFO: Warranty on page 112. 9 GT 4828—Wt. 1 lb. 12 oz. \$12.09



Axes, Hatchets, Mauls, Wedge with precision-ground edges

(19) Our finest CRAFTSMAN Axes

HEAD: Tempered, hardened tool steel, wedge-locked firmly to handle. 3 1/2-lbs. With 4 1/2-in. cutting edge. HANDLE: Hardwood. 32 in. on single bit, 34 in. on double bit. 650 lbs. striking force. BIT, ORDER INFO: Wt. 6 lbs. See warranty on page 112.

Single bit 9 GT 50371C... \$11.59

Double bit (not shown). 9 GT 50411C... \$13.59

(20) CRAFTSMAN Axe

HEAD: Hardened, tempered steel. 2 1/4-lb. With 3 1/2-in. cutting edge. HANDLE: 28 inches long. Hickory. ORDERING INFORMATION: See warranty on page 112. Shipping weight 4 lbs. 9 GT 5026C... \$10.59

(21) Our finest CRAFTSMAN Half Hatchet

HEAD: Forged axe-steel, heat-treated, polished and tempered to hold a keen edge. Preshrunk hickory plug absorbs shock. Slot for pulling nails. 3 1/4-in. cutting edge. Includes protective leather blade sheath. HANDLE: Chrome-plated 13-in. tubular steel. Slip-resistant neoprene grip. ORDERING INFORMATION: See warranty, pg. 112. Shipping weight 1 lb. 14 oz. 9 GT 4812... \$12.99

Half Hatchet (not shown). Not Craftsman.

HEAD: Heat-treated, hardened forged steel. 3 1/2-inch cutting edge. Double-steel wedge holds head firmly on handle. Slot for pulling nails. Black enamel finish. Protective leather sheath. HANDLE: Measures 13 inches long. Hickory. ORDERING INFORMATION: Shpg. wt. 2 lbs. 9 GT 4800... \$7.79

(22) CRAFTSMAN Camper's Axe

HEAD: Polished solid steel head and neck. 2 1/4-in. cutting edge. Slot for pulling nails. Protective leather sheath open at top for driving nails, tent stakes. HANDLE: Solid steel with slip-resistant neoprene grip. 13 inches long. ORDERING INFORMATION: See warranty on page 112. Shipping weight 2 pounds. 9 GT 4810... \$12.59

(23) Woodchopper's Maul

For splitting wood. HEAD: Made of high-carbon steel with polished edge. 6-pound head and 3 1/4-inch cutting edge. HANDLE: Measures 36 inches long. Hickory. ORDERING INFORMATION: See warranty on page 112. Shipping weight 8 lbs. 9 GT 50741C... \$15.59

(24) Woodchoppers Maul with Nupla handle

8-pound head of high-carbon, heat-treated steel. 3 1/4-inch cutting edge. Nupla fiberglass handle with neoprene, cushion grip. Nulok fiberglass reinforced end cap... install new head quickly without tools. Fits most standard size maul, sledge heads. ORDERING INFORMATION: See warranty on page 112. Shpg. wt. 10 lbs. 9 GT 50742C... \$24.99

(25) Splitting Wedge

Use for splitting wood. HEAD: Hand-forged carbon steel. 5 lbs. 9 in. long. ORDERING INFORMATION: See warranty on page 112. Shpg. wt. 5 lbs. 2 oz. 9 GT 5074... \$5.79

(26) Wood Splitter

Split your own firewood... no need to hold wedge. CONSTRUCTION: High-carbon steel wedge slides over sturdy, twin-channel steel guide. 3 1/4 inches high. Split any diameter logs up to 28-inches long. Flat metal base plate with anchor holes. Spike point on base reduces chance of log slipping. ORDERING INFORMATION: Use with 10-lb. sledge hammer (12) at left. See warranty, page 112. Shpg. wt. 47 lbs. 9 GT 50749L... \$49.99

(1 and 2) Heavy, medium-duty Braces

(1) CRAFTSMAN Heavy-duty Brace

CONSTR: Built for heavy-duty service. Enclosed box ratchet keeps dirt out, reduces wear... never needs lubricating. Rugged steel frame is 1/2 in. in diameter. 10-in. sweep. Metal parts nickel-plated to resist rust. Steel reinforced high-impact Cycloc® plastic head turns on ball bearings. Brass reinforced center grip for added strength. Alligator-type self-centering chuck grabs both round, tapered-shank bits.

ORDER INFO: See warranty, page 112. 9 GT 4241—Wt. 3 lbs. 1 oz.\$21.39

(2) Medium-duty Brace

CONSTR: Sturdy 7/16-in. steel frame. Designed to handle all but heavy-duty jobs which require professional brace at left. Steel reinforced hardwood head. Hardwood center grip. 2-jaw chuck holds both round, tapered-shank bits. Semi-enclosed ratchet. Knurled ring. Exposed parts nickel-plated. 10-inch sweep. Not Craftsman.

Imported.
ORDERING INFORMATION:
9GT42402—Wt. 2 lbs. 5 oz.\$6.29

(3 thru 7) CRAFTSMAN® Bits for braces

(3 and 4) Solid-center Auger Bit Sets

Professional-quality wood-boring bits for use with hand braces... wood-tested for dependability. Heat-treated, tempered carbon tool steel. Precision-milled and polished. Self-starting screw points are accurately centered. Spiral twists are uniformly ground to close tolerances for precision cutting, smooth, non-binding action.

(3) 13-pc. Set without caps. Pouch incl. Sizes: 4/16 thru 1-in. in 16ths.

ORDER INFO: Warranty p. 112. 9 GT 41721—Wt. 3 lbs. 2 oz.\$38.79

(4) 6-pc. Set with caps. Removable caps cover tips. Metal rack with pre-punched slots in back for mounting. Sizes: 1/4, 3/8, 1/2, 5/8, 3/4, 1-inch diameter.

ORDER INFO: Warranty p. 112. 9 GT 4156—Wt. 1 lb. 12 oz.\$17.49

Individual Solid-center Auger Bits with caps. Same quality bits as (4).

SIZES, ORDERING INFORMATION:

Catalog No.	Size	Wt.	Each
9 GT 41751	1/4 in.	3 oz.	\$2.89
9 GT 41753	3/8 in.	4 oz.	2.89
9 GT 41755	1/2 in.	5 oz.	2.89
9 GT 41757	5/8 in.	6 oz.	3.29
9 GT 41759	3/4 in.	6 oz.	3.69
9 GT 41762	7/8 in.	7 oz.	3.89
9 GT 41764	1 in.	9 oz.	4.39

(8 thru 11) Hand Drills, Push Drills, Push Drill Points

(8) CRAFTSMAN Hand Drill Set

CONSTR: Steel. 3-jaw chuck clamps onto round-shank bits to 1/4-in. diam. Wood handle. Pinion gears for smooth torque. 8 drill bits (1/16 thru 11/64-in.) stored in wood handle. 11 1/2 in. long.

ORDER INFO: Warranty, p. 112. Wt. 1 lb. 9 oz. 9 GT 4231.....\$11.89

(9) CRAFTSMAN Professional-quality Push Drill Set

Chrome-plated. Heavy-duty spring. Locking chuck. 8 drill points (1/16 thru 11/64-in.). 12 inches long.

ORDER INFO: See warranty, page 112. Shpg. wt. 12 oz. 9 GT 4222.....\$13.59

(10) CRAFTSMAN Push Drill Set. Plastic handle, alum. cap-8 drill points (1/16 thru 11/64-in.). 8 1/2 in.

ORD. INFO: Warranty, p. 112. Wt. 12 oz. 9 GT 4221.....\$11.69

(11) 8 CRAFTSMAN Push Drill Points. (1/16-11/64-in.). ORDER INFO: Warranty, p. 112. Wt. 3 oz. 9GT42216.....Set \$4.19

(19 thru 23) Planes

(19) Our Finest CRAFTSMAN Bench Planes. Cut with grain. Lever, screw device gives precise sidewise, depth adjustment. Cast-iron sides, bottom milled, ground for accuracy. Double-plane cutter with blade, cap. Snug-fitting frog. Cutlery-steel blade 2 in. wide. Wood handle, knob.

ORD. INFO: Wrrnty, p. 112. Smooth No. 4. For small workpieces. 9 3/4 in. long. Shpg. wt. 4 lbs. 2 oz.

9 GT 37064.....\$19.39

Jack No. 5. For truing big board surfaces. 14 in. long. Shpg. wt. 5 lbs. 4 oz.

9 GT 37065.....\$21.39

Replacement Blades for (19, 20) 9 GT 37066—Wt. 7 oz.\$4.39

(20) Sears Bench Plane. All purpose planing with the grain. Smooth No. 4. Cutlery-steel blade, 2 in. wide. Tool 9 3/4 inches long.

ORDER INFO: Not Craftsman. 9 GT 37063—Wt. 4 lbs. 7 oz.\$13.59

(21 thru 23) CRAFTSMAN Block Planes. Use in one hand... makes easy work when job cannot be taken to bench or vise. For planing small pieces, beveling, planing corners, chamfering. Single cutlery-steel blade cutter set as low as 20° angle for cutting across grain. Adjustable blade for any thickness.

ORDER INFO: Warranty, page 112.

(21) 6 in. long. 1 5/8-in. blade. 9 GT 37052—Wt. 1 lb. 10 oz.\$10.69

(22) 7 in. long. 1 5/8-in. blade. 9 GT 37051—Wt. 1 lb. 10 oz.\$8.79

(23) 3 1/2 in. long. 1-in. blade. 9 GT 37057—Shpg. wt. 5 oz.\$2.59

(24 thru 27) CRAFTSMAN® Forming Tools

CONSTR: Cut, form materials up to hardness of mild steel. Chisel-like teeth in Sheffield Steel blade. Die-cast zinc-alloy body.

(24) Pocket Plane Type 2x5 1/2 inches long.

ORDER INFO: Warranty p. 112. Shpg. wt. 9 oz. 9 GT 67723.....\$3.09

Extra Blade for (24). 9 GT 67733—Wt. 3 oz.\$1.59

(25) Plane Type. Plastic handle. 5x12 1/2 in. long.

ORDER INFO: Warranty, p. 112. Shpg. wt. 1 lb. 8 oz. 9 GT 67722.....\$6.79


Extra Blades. For (25), (27) Flat. 1 1/2 inches wide. Shipping weight 5 oz.

9 GT 67731.....\$1.89

Half-round. 1 1/2 in. wide. Shipping weight 5 oz.

9 GT 67732.....\$1.99

CRAFTSMAN® Knife Collection

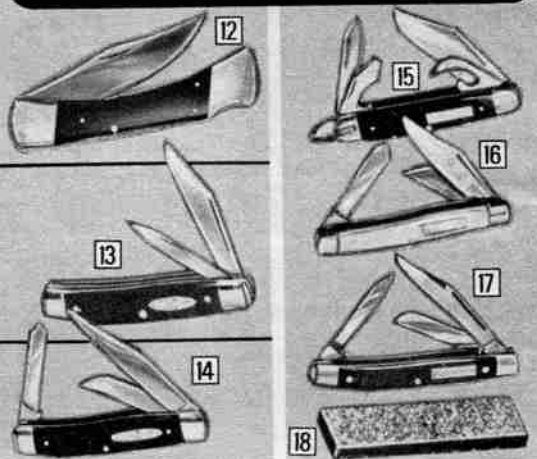

(12 thru 14) A.C.A. Edge® Knives

CONSTRUCTION: Amazing Cutting Action edge (A.C.A. Edge®) blades made of hardened, high-carbon steel that's rust-resistant... the sharpest knives we sell. Bolsters and shield of brass alloy. Blade linings of solid brass. Handle of break-resistant Delrin® plastic.

Sharpening instructions included.

(12) Lock-Back Knife. Our finest. Blade locks securely in place. 4 1/16 in. long closed.

ORDER INFO: See warranty, p. 112. Shpg. wt. 12 oz. 9 GT 95078.....\$29.97

(13) Gentleman's Jackknife

2 blades. 3 5/16-in. long with blade closed.

ORDERING INFO: See warranty, p. 112. Wt. 4 oz. 9 GT 95067.....\$11.97

(14) Premium Stockman Knife

3 blades, 4 inches long with blade closed.

ORDER INFO: See warranty, p. 112. Wt. 5 oz. 9GT95066.....\$15.97

(15 thru 17) Pocket Knives

CONSTRUCTION: High-carbon steel blades. Nickel-silver bolsters. Brass linings and rivets. Handle of Delrin® plastic.

(15) The Lumbar Knife. 2 blades, screwdriver, can opener. 3 3/4 in. long with blade closed.

ORD. INFO: See warranty, p. 112. Wt. 6 oz. 9 GT 95043.....\$10.97

(16) The Bowie Stockman. 3 blades; clip with bar nail nick. sheepfoot, spey. 4 in. long, blade closed.

ORD. INFO: Warranty, p. 112. Wt. 6 oz. 9 GT 95044.....\$12.97

(17) 3-Blade Stock. Knife. 3 blades; 2 5/8 inches long with blade closed.

ORDERING INFORMATION: See warranty, page 112. Shipping weight 4 ounces. 9 GT 95072.....\$7.97

(18) CRAFTSMAN Combination Sharpening Stone

CONSTRUCTION: Vitrified silicon carbide. One side is coarse, the other side is fine. Excellent knife sharpening tool.

SIZE, ORDERING INFORMATION: 2x1x7 in. long. 9 GT 64402—Shipping weight 1 lb. 2 oz.\$2.69

Miscellaneous Hand Tools



(29) CRAFTSMAN Glass Cutter. Super-tough tungsten-carbide cutting wheel. Malleable iron handle.


ORD. INFO: Wrrnty, p. 112. 9 GT 3797—Wt. 4 oz.\$2.89

(30) CRAFTSMAN Scratch Awl. 3 1/4-in. tempered-steel blade in shock-proof plastic handle.

ORDERING INFORMATION: Warranty p. 112. 9 GT 41027—Wt. 4 oz.\$1.47

(31) CRAFTSMAN Revolving Punch. For leather, plastics, canvas, rubber. Made from nickel-plated steel. Sizes: 5/64, 3/32, 7/64, 1/8, 3/16-in.

ORDERING INFORMATION: See warranty p. 112. 9 GT 4307—Wt. 12 oz.\$4.79

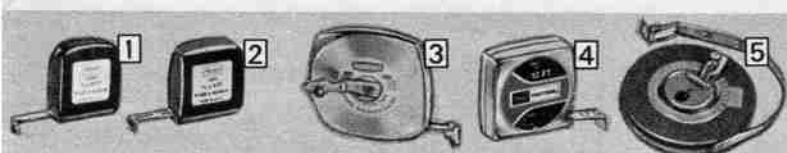

(1 thru 7) Flexible Steel Tapes

(1, 2) CRAFTSMAN® Push-pull Tape
CONSTRUCTION: White enamel finish blade; 1/2 in. wide marked in 1/16-in. graduations. Black Cyclac® plastic case won't chip or crack. Case exactly 2 in. long for precise inside or outside measurements.

ORDERING INFORMATION:

- (1) With 6-ft. long blade
9 GT 3919—Shipping weight 4 oz.\$1.19
(2) With 10-ft. long blade
9 GT 3918—Shipping weight 5 oz.\$2.19

Replacement Blades. Marked 1/16 in.
ORDER INFO: Order old tape size.

Catalog No.	Width	Length	Shpg. wt.	Price
9GT39192	1/2 in.	8 ft.	4 oz.	\$1.69
9GT39193	1/2 in.	10 ft.	4 oz.	1.99
9GT39194	1/2 in.	12 ft.	4 oz.	2.29
9GT39195	3/4 in.	10 ft.	5 oz.	2.79
9GT39196	3/4 in.	12 ft.	6 oz.	2.89
9GT39197	3/4 in.	16 ft.	6 oz.	3.59
9GT39198	3/4 in.	20 ft.	7 oz.	4.39
9GT39199	3/4 in.	25 ft.	8 oz.	4.69
9GT39124	1 in.	12 ft.	6 oz.	2.89

(3) Winding Reel Tape with chrome-plated zinc case

CONSTRUCTION: Flexible 3/4-in. wide steel blade. White enamel finish. Black markings every 1/4 inch, stud markings every 16 inches. Adjustable end hook. Choose 50 or 100-ft. blades.

ORDERING INFORMATION:

- 9 GT 3908—50 feet. Wt. 1 lb. 3 oz.\$5.89
9 GT 39082—100 ft. Wt. 1 lb. 7 oz. 8.79

(4) CRAFTSMAN Lock Tape
CONSTR: Flexible. DuPont Mylar® polyester-coated steel blade. Press button to lock, return blade. Chrome-plated zinc case attaches to belt.

Catalog Number	Width in.	Length ft.	Shipping weight	Each
9 GT 39213	3/4	10	11 oz.	\$5.79
9 GT 39214	3/4	12	11 oz.	6.29
9 GT 39215	3/4	16	14 oz.	7.79
9 GT 39217	3/4	20	14 oz.	8.79
9 GT 39209	3/4	25	13 oz.	9.69
9 GT 39222	1/2	10	9 oz.	4.19
9 GT 39223	1/2	12	9 oz.	4.59

As above, but marked in inches and millimeters. Graduated to 1/16 and 1 mm. 12 ft. long (3.65 meters).

- 9 GT 39224—1/2-inch wide. Wt. 9 oz.\$4.59
9 GT 39218—3/4-in. wide. Wt. 11 oz. 6.49

(5) Winding Reel Tape, vinyl-covered case

CONSTR: Flexible 3/4-in. wide steel blade. White enamel finish. Black markings every 1/4 in., stud markings every 16 in. Chrome-plated reel and folding handle. Double roller mouthpiece. Hook-and-roller permits 1-man measuring.

ORDERING INFORMATION:

- 9 GT 39001—50 ft. Wt. 14 oz.\$10.69
9 GT 39002—100 ft. Wt. 1 lb. 7 oz. 13.59

Replacement Blades for (5) above.

ORDERING INFORMATION:

- 9 GT 39031—50 ft. Wt. 13 oz.\$5.19
9 GT 39032—100 ft. Wt. 1 lb. 5 oz. 7.29

(6 and 7) Belt Tapes



(6) 12-foot Tape

CONSTRUCTION: Belt clip, chrome-plated case. Locking button, 1-in. wide yellow blade. Markings at feet, inches, and 1/16 inch. Stud markings.

ORDERING INFORMATION:


- 9 GT 39123—Wt. 11 oz.\$8.29

(7) CRAFTSMAN 25-ft. Tape

CONSTR: Belt clip, black Cyclac® plastic case. Locking button. Markings at ft., in. 1/16 in. on 3/4-in. wide polyester-coated yellow steel blade.

ORDERING INFORMATION:

- 9 GT 39226—Wt. 13 oz.\$8.79

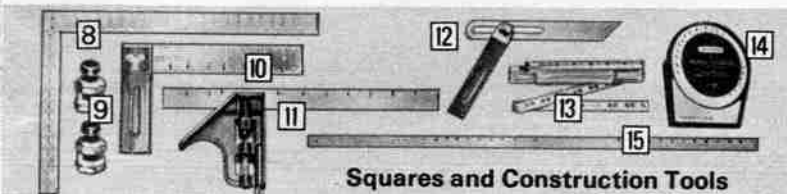

Squares and Construction Tools

(8) CRAFTSMAN Aluminum Rafter Square

CONSTRUCTION: Our finest square. Made of hardened aluminum. . . won't rust or warp. Octagon and 100ths scale. Rafter and brace table. Precision graduations. Face marked in 8ths, 16ths; back marked in 10ths, 12ths. Black numbering. 24x2-in. body and 16 1/2-in. tongue.

ORDERING INFORMATION: Warranty, p. 112.

- 9 GT 39644C—Shipping weight 2 lbs.\$12.59

CRAFTSMAN Steel Rafter Square

CONSTRUCTION: Same as above only steel, hard tempered and lacquer coated.

ORDERING INFORMATION:

- 9 GT 39641C—Shipping weight 3 lbs.\$7.79

(9) Angle or Stair Gauge. Use on rafter or framing squares for repeating angles.

CONSTRUCTION: Brass. Steel screw.

ORDERING INFORMATION: Package of 2.

- 9 GT 3956—Shipping weight 4 oz.Pkg. 89c

(10) CRAFTSMAN Try Square

CONSTRUCTION: Eight-inch polished steel blade. Yellow markings top, bottom, both sides. Hardwood handle, brass trim.

ORDERING INFORMATION:

- 9 GT 39594—Shipping weight 10 oz.\$6.79

(11) CRAFTSMAN Combination Square

CONSTR: Polished, oiled steel blade 12x1 in. Black markings: 8ths, 16ths on one side; 10ths, 32nds on other. Cast zinc 4-in. head has extra large level vial, removable scriber.

ORDERING INFORMATION:

- 9 GT 39543—Shipping weight 1 lb. 1 oz.\$7.79

(12) CRAFTSMAN Sliding "T" Bevel. Divides or transfers angles, checks edges.

CONSTR: Adjustable 8-in. steel blade. Hardwood handle, brass trim.

ORDERING INFORMATION:

- 9 GT 39485—Shpg. wt. 7 oz.\$4.89

(13) CRAFTSMAN 6-ft. Extension Folding Rule. Outside reading.

CONSTR: Brass extension. Embedded marks in 16ths in., both edges. Stud marks every 16 in. Brass strike plates. Basswood finish. 5/8 in. wide.

ORDERING INFORMATION:

- 9 GT 3931—Shpg. wt. 9 oz.\$5.39

(14) CRAFTSMAN Automatic Protractor

CONSTR: Sturdy plastic. Easy-to-read 4-in. diam. face reads within plus or minus 1/2°. Gives direct readings at any angle. Has smooth magnetic base, adheres easily to steel carpenter's square. 4 1/2x3x5 in. high.

ORDERING INFORMATION:

- 9 GT 3995—Shpg. wt. 10 oz.\$7.29

(15) CRAFTSMAN Meter Stick. Tables convert English standard to metric.

CONSTRUCTION: Graduations in mm. and inches. Lightweight, flexible aluminum won't crack. Measures 39 1/2 in. (1 meter).

ORDERING INFORMATION:

- 9 GT 3762C—Shpg. wt. 1 lb.\$1.89



Estimate distances quickly, automatically

Measures at 6 to 100 ft.



Optical Tape Measure™
Measures at 50 to 600 ft.



Handy Rolling Measuring Wheel
\$29.99

(16 and 17) Optical Tape Measures™. Pocket-sized measuring device. No tape to rewind. . . no need to trek over mud and snow. Simplifies the task of water or uneven terrain.

OPERATION: Works like a camera rangefinder. Sight any object through viewfinder, adjust knob to focus, read scale for distance.

CONSTR: Dust-free case of rugged, high-impact polypropylene. Precision-welded construction, shock-absorbing optical mounts.

(16) 50 to 600 ft. Markings
every foot at low end, every 10 to 20 ft. high end. 8 1/2x4x1 1/2 in. thick. Weighs only 15 oz.

ORDER INFO: Instructions incl.

- 9 GT 3903—Wt. 1 lb. 7 oz.\$32.99

(17) Measures 6 to 100 ft.
Markings every inch at low end, every 10 ft. high end. 5 1/2x3 1/4x1 1/8 in. thick. Weighs only 15 oz.

ORDER INFO: Instructions incl.

- 9 GT 3904—Wt. 13 oz.\$14.99

(18) Protective Cases for (16), (17), above.

- 9 GT 3905—Case for 50 to 600-ft. measure. Shpg. wt. 12 oz.\$7.99

- 9 GT 3906—Case for 6 to 100-ft. measure. Shpg. wt. 7 oz. 3.99

(19) Rolling Measuring Wheel. Estimate distances simply by walking. No need for a second person to hold the tape. Sealed counter records ft. and in. up to 1000 ft. Push button returns counter to zero.

CONSTRUCTION: High-impact polypropylene case. Aluminum handle extends from 20 to 39 inches. Wheel diameter 4 in. Neoprene tires.

ORDERING INFORMATION: Complete instructions included.

- 9 GT 39004—Shipping weight 3 pounds 2 ounces.\$29.99

Levels with large, acrylic monovials for easy reading

(20 thru 25) You get pinpoint accuracy thru a full 360° rotation for both plumb and level readings. Levels feature barrel shaped monovials of tough acrylic, almost 20% larger than standard vials for easy reading.

(20) Sears 24-inch Level

MONOVIALS. FRAME: Aluminum with 3 vials; 2 plumb, 1 level.

ORDERING INFORMATION:

- 9 GT 39955—Shpg. wt. 1 lb. 6 oz.\$5.89

(21 and 22) CRAFTSMAN Levels. All but 78 inch have easy-to-read top window.

FRAME: Aluminum frame has closed ends for strength. MONOVIALS. ORDERING INFO: Warranty, pg. 112.

Catalog Number	Length inches	Vials			Shpg. wt.		Price
		Plumb	Level	45°	lbs.	oz.	
9 GT 39922	18	1	1	1	1	4	\$8.79
9 GT 39924	24	2	1	1	1	8	9.69
9 GT 39925C	28	2	1	1	2	3	10.69
9 GT 39926C	48	2	2	2	3	3	18.49
9 GT 39918L	78	3	2	2	6*	3	35.89

* If mailed, takes 15 pound rate. see Parcel Post Info., p. 69.

(23) CRAFTSMAN 24-inch Level. Sears Best level has 360° protractor vial that reads at any angle. MONOVIALS. FRAME: Lightweight aluminum with 1 plumb, 1 level monovial. Closed ends for strength. One magnetic edge.

ORDERING INFORMATION:

- 9 GT 39928—Shipping weight 1 lb. 11 oz.\$11.69

(24) CRAFTSMAN 9-inch Torpedo Level

Fits easily in tool box or pocket. MONOVIALS. FRAME: 3 vials; 1 level, 1 plumb and 1 45° Polycast frame.

ORDERING INFORMATION:

- 9 GT 39823—Shipping weight 7 ounces\$4.89

(25) CRAFTSMAN Top-reading Torpedo Level. 9 in. long. Includes one level, one plumb, 45° vial. Aluminum I-beam frame has one magnetic edge, one V-groove edge.

ORDERING INFORMATION:


- 9 GT 39833—Shipping weight 7 ounces\$5.79

(26) Magnetic Protractor Level

CONSTRUCTION. MONOVIAL: Plastic. Measures 2 1/4x2 1/4x3/4 inches overall. One monovial. Reads plumb or level within 1/2°. Scale for pitch readings.

ORDERING INFORMATION:

- 9 GT 3990—Shipping weight 4 ounces\$2.89

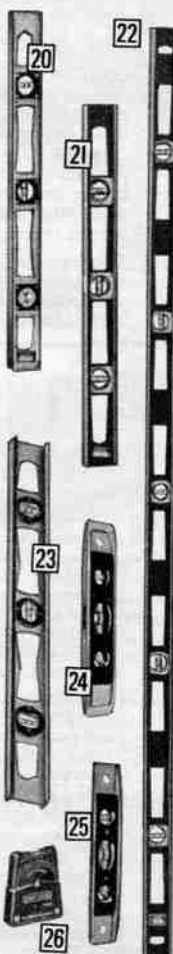

Work Aprons with 10 or 12 pockets



Our Finest Leather Work Apron \$33.99


- Built totally of top-selected cow hides with hand-tooled detailing
- Comfortable "off-the-hip" design

CONSTRUCTION: Bags, pockets made of supple boot leather. Belt and trim of top-grain saddle leather. Adjustable bags and holders... hang to the front or to the side—adjust to any position for greatest comfort. Hand-tooled design on leather belt. Reinforced stitching, oversized rivets at stress points for years of wear.

COMPARTMENTS: 12 pockets. 2 large main pockets, 2 medium-sized pockets, 8 small tool pockets, steel tape holder, holster for combination square. 2 tool loops. 4 screwdriver slots. Key holder. Adjustable leather belt.

ORDERING INFORMATION:

9 GT 45152—Shipping weight 2 pounds 9 ounces \$33.99

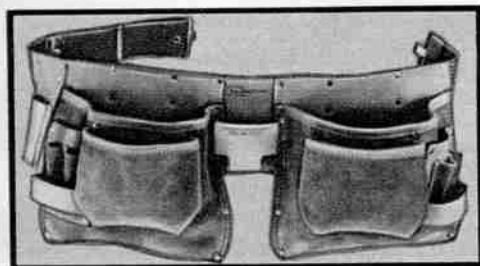

Our most popular Leather Work Apron \$24.49

- Pockets made from top-selected hides—rough on outside... smooth on inside
- Pocket edges also leather-bound for long wear

CONSTRUCTION: Nail pockets are bound around all edges. Double-row stitching at stress points with linen thread. Oversized rivets capped on both sides. All-cotton web belt, 2 1/4-in. wide, with nickel-plated steel fittings. Split-leg design.

COMPARTMENTS: Ten pockets. Two large main nail pockets, 2 medium-sized nail pockets, 6 small tool pockets, steel tape holder, holster for combination square. Two tool loops.

ORDERING INFORMATION: Shipping weight 1 pound 12 ounces. 9 GT 45147 \$24.49

Tanera® (man-made) Apron (not shown). As apron (45147) above, but pockets of Tanera® synthetic "leather"... feels real. **ORDERING INFORMATION:** Shipping weight 1 pound 8 ounces. 9 GT 45151 \$16.49




Split-cowhide Work Apron \$19.99

CONSTRUCTION: Split-cowhide. Split-leg design. Stitching, rivets at stress points.

COMPARTMENTS: 4 pockets. 2 large, 2 medium nail pockets. Steel tape holder. Aluminum holster for combination square. 2 tool loops. Adjustable belt.

ORDERING INFORMATION: Shpg. wt. 2 lbs. 2 oz. 9 GT 45145 \$19.99

Leather Tool Holders

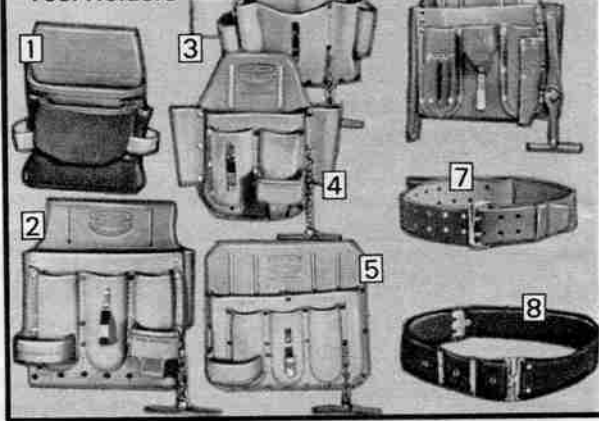

(1) 6-pocket Nail, Tool Bag

CONST: Glove leather.

COMPARTMENTS: 1 large, 1 med. nail, 4 small pockets. 2 tool loops, tunnel belt loop.

SIZE, ORDER INFO: 10 1/2 x 12 in. 9 GT 45143—Wt. 1 lb. \$11.69

(2 thru 6) Tool Holders

CONSTRUCTION: Top grain saddle leather with oversized rivets.

(2) Electrician's Tool Holder

COMPARTMENTS: Main, 3 front, 2 side pockets. Hammer loop, tape holder, tool snap, tape chain.

SIZE, ORDER INFO: 9x8 3/4 in. 9 GT 45447—Wt. 1 lb. 4 oz. \$9.69

(3) 7-pocket Tool Holder

COMPARTMENTS: Partitioned main, 3 front, 2 open-end small tool pockets; side loop, tape chain, tool snap, tunnel belt loop.

SIZE, ORDER INFO: 8x10 in. 9 GT 4580—Wt. 1 lb. 6 oz. \$12.59

7-pocket Tool Holder. Like (3), but gray Tanera® synth. "leather" construction... feels real. 9 GT 4588—Wt. 1 lb. 6 oz. \$9.99

(4) 5-pocket Tool Holder

COMPARTMENTS: Large main, 2 front, 2 open-end pockets, steel tape holder, tape chain, tool snap, wide belt slots.

SIZE, ORDER INFO: 9x8 3/4 in. 9 GT 45446—Wt. 13 oz. \$6.79

(5) 5-pocket Tool Holder

COMPARTMENTS: Partitioned main, 3 front pockets. Strap loop, tape chain, tool snap. Belt slots.

SIZE, ORDER INFO: 9x8 3/4 in. 9 GT 45805—Wt. 1 lb. \$8.29

(6) Deluxe 12-pocket Heavy-duty Electrician's Tool Holder. With hand tooling.

COMPARTMENTS: Partitioned main, 2 front; 4 tool slots on sides; tape pocket, insulated and anchored tape sling with release snaps.

SIZE, ORDERING INFO: Shpg. wt. 1 lb. 10 oz. 9 GT 4589 \$24.99

(7) Hand-tooled Leather Belt. Use with Holder (6) above and other pouches.

2 in. wide, extra thick; with two-tongued roller buckle. Fits waist sizes 29 thru 46 in.

ORD. INFO: Wt. 1 lb. 6 oz. 9 GT 45892 \$6.99

(8) Adjustable Belts. Fit

waist sizes 29 to 46 in. Nickel-plated fittings.

TYPE, ORDERING INFO: Cotton Web. 2 1/4 in. wide. 9 GT 45895—Wt. 11 oz. \$4.39

Leather Belt. 1 3/4 in. wide. Top grain leather. 9 GT 45891—Wt. 9 oz. \$5.29

Canvas Carpenter's Apron

(not shown). Waist length. **CONSTRUCTION:** Cotton canvas. Criss-cross straps.


COMP. 14 pockets: 3 rows of nail, tool; 2 loops both sides.

ORDERING INFORMATION: 9 GT 3750—Wt. 11 oz. \$4.39

Full Length Canvas Carpenter's Apron.

Cotton canvas. One large, one small pocket. Extends to knees. 9 GT 3752C—Wt. 4 lbs. \$4.49

Construction and Masonry Specialty Tools

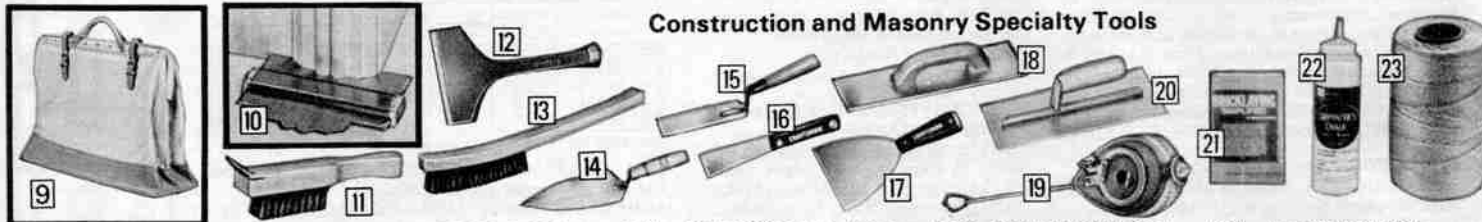

(9) Masonry Tool Bag. Leather, reinforced at bottom, 3 in. up side. Steel frame. 9x11 in. **ORDER INFO:** Wt. 11 oz. 9 GT 4510 \$29.99

(10) Contour Gauge. Stainless steel needles form 6-in. row of contour. Plastic-coated steel body. Imported. **ORDER INFO:** Wt. 10 oz. 9 GT 3946 \$4.19

(11) Wire Brush, Scraper. 4 rows of 10 tufts, 1 1/2 x 11 x 1 3/8 in. wide. Steel scraper, wood handle. **Shipping weight** 15 oz. 9 GT 3647 \$2.19

(12) CRAFTSMAN Bricklayer's Chisel. Forged steel, 4-in. bit. Single bevel edge. **ORDER INFO:** Wt. 1 lb. 2 oz. 9 GT 6558 \$4.39

(13) Curved Back Wire Brush. 3 rows of 19 tufts, 1 1/2 x 14 x 1 in. Wood handle. **ORDERING INFORMATION:** 9 GT 3668—Wt. 9 oz. \$9c

(14) Philadelphia-pattern Brick Trowel. Tempered steel. 4 1/2 x 8 1/2 in. Wood handle. **ORDERING INFORMATION:** 9 GT 6556—Wt. 11 oz. \$3.29

(15) CRAFTSMAN Patching Trowel. Steel. Blade 1 3/4 x 5 1/2 inches. Wood handle. **ORDERING INFORMATION:** 9 GT 6589—Wt. 6 oz. \$2.29

(16) CRAFTSMAN Putty Knives. Carbon steel blade, 1 1/4 in. wide. Plastic handle. **ORDERING INFO:** Shpg. wt. 5 oz. 9 GT 90151—Flexible \$1.89 9 GT 90161—Stiff 1.99 9 GT 90091—Chisel-point 2.09

(17) CRAFTSMAN Wall Scraper. Flexible, carbon steel blade. Plastic handle with brass hammerhead for resetting dry-wall nails. **BLADE SIZE, ORDER INFO:** 9 GT 90054—4-in. Wt. 6 oz. \$3.29 9 GT 90056—6-in. Wt. 7 oz. 4.39

(18) Aluminum Float. For floating cement to surface before troweling. 14x4x1 1/4 inches deep. Wood handle. **ORDERING INFO:** Wt. 14 oz. 9 GT 65442 \$3.69

(19) CRAFTSMAN Dual-purpose Chalk/Plumb Line. Full rewind cylinder with fold-away handle. Slide-action brake releases automatically. Die-cast case. Combination refill cap and plumb bob tip. Hooking on end. **SIZE, ORDERING INFO:** 50-foot Line. Wt. 11 oz. 9 GT 3773 \$2.89 100-foot Line. Wt. 12 oz. 9 GT 37734 \$3.89

(20) CRAFTSMAN Finishing Trowel. Spring steel. 4 3/4 x 11-in. blade. Alum. alloy shank, wood handle. **ORDER INFO:** Wt. 1 lb. 2 oz. 9 GT 6550 \$5.79

(21) How-To Booklets

TITLE, ORDER INFO: State catalog number and booklet number.

Bk. no.	Title	Wt. oz.
617	Concrete Work Simplified	6
631	How-to-Build Patios and Sundecks	6
668	Bricklaying Simplified	10
9 GT 2915H	 Each	\$2.50
Any two or more	 Each	2.25

(22) Powdered Carpenters' Chalk. For use with (19) at left. 8-ounce squeeze bottle. **COLOR, ORD INFO:** Wt. 11 oz. 9 GT 37587—Blue \$1.19 9 GT 37588—Red 1.19

(23) Nylon Twine. 100 yds. No. 21. Safe working load of 34 lbs. White. **ORDERING INFORMATION:** 9 GT 76551—Wt. 10 oz. \$1.46



Play It Safe!
Job Safety Equipment
Save 10%
when you buy any 3 or more items



(1) **Paint Spray Respirator***. Band.
ORDER INFO: Not for use with ammonia.
9 GT 18573—Wt. 1 lb. 2 oz. \$15.99
Any 3 or more items Ea. 14.39
Extra filter-cartridges for (6). Pkg. of 2.
9 GT 18574—Wt. 8 oz. Pkg. \$6.49
Any 3 or more items Ea. 5.80

(2) **Dust Mask**. Foam-rubber washable, replaceable face piece. Headband.
9 GT 18521—Wt. 4 oz. Ea. \$2.89
Any 3 or more items Ea. 2.60

Replaceable Filters for (2) above. Five.
9 GT 18522—Wt. 4 oz. Pkg. \$1.99
Any 3 or more items Ea. 1.79

(3) **Dust Respirator**. Rubber face piece, headband. Washable filter.
9 GT 1852—Wt. 5 oz. Ea. \$6.99
Any 3 or more items Ea. 6.29

(4) **Dust and Mist Respirator***. For most dusts incl. pollen, grain, wood.
9 GT 1852—Wt. 10 oz. Ea. \$9.99
Any 3 or more items Ea. 8.99

Extra filters for (9 GT 1852). Pkg. of 5.
9 GT 18525—Wt. 3 oz. Pkg. \$1.99
Any 3 or more items Ea. 2.42

(5) **Protective Spectacles†**. Hardened impact-resistant glass lenses reduce possibility of eye injury. Plastic frame, mesh side shields.

ORDERING INFORMATION:
9 GT 1855—Wt. 5 oz. Ea. \$6.99
Any 3 or more items Ea. 6.29

(6) **Flexible Mask Impact Goggles†**. Polycarbonate plastic lenses, body which reduce the possibility of a flying object causing eye injury. Perforated side shields for ventilation. Elastic strap adjusts; fit over glasses.

ORDERING INFORMATION:
9 GT 1859—Wt. 7 oz. Ea. \$2.29
Any 3 or more items Ea. 2.06
Dust, Chemical Goggles. As above but sides have indirect vents.

ORDERING INFORMATION:
9 GT 18593—Wt. 6 oz. Ea. \$2.79
Any 3 or more items Ea. 2.51
Extra lens for (9 GT 1859, 9 GT 18593).
ORDERING INFORMATION:
9 GT 18591—Wt. 3 oz. \$1.39
Any 3 or more items Ea. 1.25

(7) **CRAFTSMAN Face Shield**. Polycarbonate window 8x11½ inches. Head gear adjusts to head size.
9GT18613—Wt. 1 lb. 1 oz. Ea. \$6.99
Any 3 or more items Ea. 6.29
Replacement window for (7).
9 GT 18614—Shpg. wt. 5 oz. \$3.99
Any 3 or more items Ea. 3.59

(8) **Hearing Protector**. For high noise areas. Contoured foam ear cushions. Plastic cups. Vinyl-covered metal headband adjusts.
9 GT 1863—Shpg. wt. 1 lb. \$10.99
Any 3 or more items Ea. 9.89

(9) **Ear Plugs**. Molded soft plastic. For noise levels under 110 decibels. Carrying box, chain incl. Med. size.
ORDER INFO: Keep clean.
9 GT 18695—Shpg. wt. 3 oz. Pr. 89c
Any 3 or more items Ea. Pr. 80c

(10) **Protective Glasses**. Lenses snap in, out for fast replacement. Plastic frame. Mesh side shields.
ORDER INFO: See lenses at right.
9 GT 18632—Wt. 5 oz. \$7.49
Any 3 or more items Ea. 6.74

As (10), but without side shields.
9 GT 18631—Wt. 4 oz. \$6.49
Any 3 or more items Ea. 5.84

Replace lenses for (10). Wt. 3 oz.
9 GT 18633—Clear Ea. \$1.99
9 GT 18634—Tinted Ea. 1.99
3 or more lenses Ea. 1.79

(11) **CRAFTSMAN Hard Hats**. High-density polyethylene, fully dielectric. Two accessory slots in cap for mounting snap-on face shield (12) or hearing protectors (13). Adjustable. Meets ANSI Std. Z89.1 Class A. In white or yellow. Wt. ea. 1 lb. 4 oz.
9 GT 18622—Yellow \$4.49
9 GT 18621—White 4.49
Any 3 or more items Ea. 4.04

(12) **Snap-on Face Shield**.
ORDER INFO: Use with (11) above.
9 GT 18624—Wt. 12 oz. \$6.99
Any 3 or more items Ea. 6.29

(13) **Snap-on Hearing Protectors**.
ORDER INFO: Use with (11) above.
9 GT 18623—Wt. 14 oz. Pr. \$9.99
Any 3 or more items Pr. 8.99
†Meets American National Standards Institute Standard



Dry Chemical Fire Extinguishers Effective on all 3 fire classes

Class A fires. Burning paper, wood, fabric where water or multi-purpose dry chemical is most effective agent.

Class B fires. Burning flammable liquids (gasoline, oil, paint). Smothering is required.

Class C fires. In electrical equipment. Extinguishing agent must be non-conductor of electricity.

The higher the rating, the more effective on class of fire.

(17 thru 20) UL listed. Meet requirements of Occupational Safety and Health Act (OSHA), Marine Testing Institute, Factory Mutual Research Corporation.

CONSTR: Professionally refillable. Red epoxy-finished aluminum container, pressure gauge. Pull-pin reduces chance of accidental discharge. Rustproof plastic wall hanger.

EXTINGUISHING AGENT: Mono-ammonium phosphate dry-chemical charge. Non-toxic.

(17) **1-A; 10-B:C Extinguisher**. 17x3-inch diameter. Effective on medium-sized fires of all classes.

RANGE: 13 feet for approximately 10 seconds.
ORDER INFO: See fire class info. above, warranty at left.
9 GT 58043—Shipping weight 3 lbs. \$12.99

(18) **2-A; 40-B:C Extinguisher**. 19x4½-inch diameter. Four times as effective as (17) on B, C fires; twice as effective on A fires.

RANGE: 18 feet for approximately 10 seconds.
ORDER INFO: See fire class info. above, warranty at left.
9 GT 5805—Shipping weight 9 pounds \$22.99

(19) **4-A; 60-B:C Extinguisher**. 20x5-inch diameter. Six times as effective as (17) on B, C fires; 4 times as effective on A fires.

RANGE: 12 to 20 feet for approximately 10 seconds.
ORDER INFO: See fire class info. above, warranty at left.
9 GT 5802C—Shipping weight 19 pounds \$34.95

(20) **10-A; 80-B:C Extinguisher**. 23x7-inch diameter. Eight times as effective as (17) on B, C fires; 10 times as effective on A fires.

RANGE: 12 to 20 feet for approximately 10 seconds.
ORDER INFO: See fire class info. above, warranty at left.
9 GT 5808C—Shipping weight 37 pounds \$49.95



CONSTRUCTION: Solid-state for long life. Polymer housing. Built-in 85-decibel alarm. UL listed (conforms to UL standard 217). Unit emits short alarm once every minute for 7 days or more when battery needs replacing.

BATTERY: Includes 9-volt alkaline battery. Lasts approximately one year.

INSTALLATION: For residential use only. Mounts with 2 screws (included).

Detector with test button.

SIZE: 7 inch diameter, 1¾ inches high.

TEST PROCEDURE: No smoke required to test . . . just press button, alarm sounds indicating horn and circuitry are operating. Resets automatically.

ORDERING INFORMATION: See warranty below.

(14) 9 GT 57002—With white housing

(15) 9 GT 57003—Walnut-tone housing, wood-look center
Shipping weight 1 pound 3 ounces \$22.99

(16) **Basic Early One**

SIZE: 6-inch diameter, 1¾ in. high. White housing.

TEST PROCEDURE: Direct smoke towards unit. Resets. ORDER INFO: See warranty below.

Shpg. wt. 1 lb. 3 oz.

9 GT 57001 \$18.99

FULL ONE YEAR WARRANTY ON FIRE DETECTORS (NOT INCLUDING POWER CELLS) AND FIRE EXTINGUISHERS. For one year from the date of purchase, Sears will repair or replace the item, free of charge, if defective in material or workmanship. This warranty does not apply to the power cells, which are expendable. To obtain warranty service, simply return the item to the nearest Sears store throughout the United States.

LIMITATION ON LIABILITY: Remedy under this warranty is limited to repair or replacement of the item as provided above. Sears will not be liable for loss or damage due directly or indirectly to occurrences during which the item is designed to function. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

(21) **Ceiling Fan** . . . significantly reduces heat stratification

Heat stratification occurs when warm air rises toward the ceiling and is trapped there. By installing a ceiling fan, the warm air is recirculated down to floor level to produce more uniform and comfortable air temperatures. The fan also provides circulating air comfort in large areas where there is no air conditioning or increases the effectiveness of air conditioning.

CONSTRUCTION: 52-inch Brown-color polystyrene blades and steel motor housing.

MOTOR: 216-w. heavy-duty motor with high/low speeds. Permanently lubricated bearings.

INSTALLATION: For heights to 40 ft. Extends 13 in. Use not lower than 8 ft. from the floor.

ELECTRICAL INFORMATION: UL listed; 110-120-volt, 60-Hertz, AC.

ORDERING INFORMATION: See warranty, page 84.


34 GT 9056C—Shipping weight 30 pounds \$127.99

Light Kit (not shown). Fits fan sold above. White opal glass diffuser. Use up to 100-watt standard base bulb, not included. Pull-chain on/off. Measures 7x8½ inches high.

ELECTRICAL INFORMATION: UL listed; 110-120-volt, 60-Hertz, AC.

ORDERING INFORMATION:

34 GT 9057—Shipping weight 3 pounds 6 ounces \$14.49

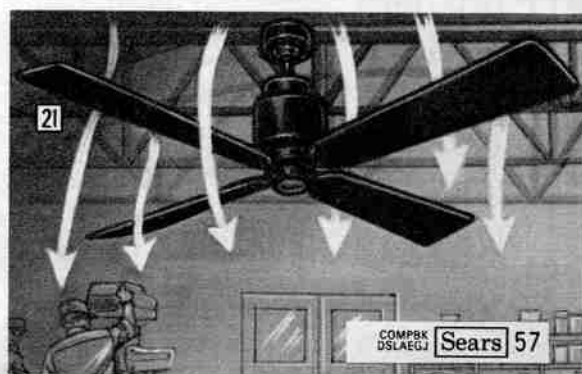



CRAFTSMAN® Drill Bits

Heat-treated six times for the added strength and durability needed for wood and metal boring

115-piece Twist Drill Bit Set \$169.99



Twist Drill Bit Sets

(1) 115-piece Twist Drill Bit Set


CONSTRUCTION: See features at left.
SIZES: 60 wire-gauge bits from 1 thru 60; 29 fractional bits from 1/16 thru 1/2-inch by 64ths of an inch; 26 lettered bits A thru Z. Metal index storage case.

ORDERING INFORMATION:
9 GT 67115—Shipping weight 9 lbs. 2 oz. ... Set \$169.99

Metal index case alone
9 GT 66853—Shipping weight 3 lbs. 12 oz. \$29.99

60-pc. Set. 60 wire-gauge bits, 1 thru 60. Case type A.
9 GT 6819—Shipping weight 1 lb. 8 oz. Set \$34.99

(A) and (B) Cases available with bit sets below Index Case (high-impact polystyrene)



Fold Case (plastic)

Sets	Catalog Number	Size, inches																								Weight lbs. oz.	Sep. prices total	Set price
		1/16	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3	3 1/2	4	4 1/2			
4-pc.†	9GT67184																									9	\$12.26	\$10.99
7-pc.†	9GT6803	X	X	X	X	X	X	X	X																	7	4.18	3.79
10-pc.†	9GT6805	X	X	X	X	X	X	X	X	X																7	7.45	6.49
13-pc.†	9GT6807	X	X	X	X	X	X	X	X	X	X															8	12.02	10.49
15-pc.†	9GT6809	X	X	X	X	X	X	X	X	X	X	X														2	16.10	13.99
17-pc.†	9GT6811	X	X	X	X	X	X	X	X	X	X	X	X													15	21.38	17.99
21-pc.††	9GT6813	X	X	X	X	X	X	X	X	X	X	X	X	X												11	32.24	26.99
25-pc.††	9GT6815	X	X	X	X	X	X	X	X	X	X	X	X	X	X											9	49.10	39.99
29-pc.††	9GT6817	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X										9	64.86	49.99

* Turned down shank, fits 1/4, 3/8, 1/2-inch drills. † Comes with case type B. †† Comes with case type A.

STANDARD or METRIC Individual Drill Bits . . . Jobber Length

(2) Standard Individual Drill Bits SIZES AND ORDERING INFORMATION:

Catalog No.	Diam.	Length	Wt.	Each	Catalog No.	Diam.	Length	Wt.	Each
9 GT 66901	1/16 in.	17 1/2 in.	3 oz.	42c	9 GT 66936	1 1/8 in.	4 1/2 in.	3 oz.	\$1.99
9 GT 66902	3/32 in.	2 in.	3 oz.	48c	9 GT 66917	5/16 in.	4 1/2 in.	4 oz.	2.19
9 GT 66903	3/32 in.	2 1/4 in.	3 oz.	56c	9 GT 66918	3/8 in.	4 1/2 in.	4 oz.	2.59
9 GT 66904	1/8 in.	2 1/2 in.	3 oz.	60c	9 GT 66919	1/2 in.	4 1/2 in.	5 oz.	2.69
9 GT 66905	1/8 in.	2 3/4 in.	3 oz.	64c	9 GT 66934	23/64 in.	5 1/2 in.	4 oz.	2.79
9 GT 66906	3/16 in.	2 1/2 in.	3 oz.	69c	9 GT 66921	3/4 in.	5 in.	5 oz.	2.99
9 GT 66907	3/16 in.	3 in.	3 oz.	79c	9 GT 66922	7/16 in.	5 1/2 in.	6 oz.	3.29
9 GT 66908	1/4 in.	3 1/4 in.	3 oz.	89c	9 GT 66923	1/2 in.	5 1/2 in.	6 oz.	3.69
9 GT 66909	1/4 in.	3 1/2 in.	3 oz.	99c	9 GT 66924	27/64 in.	5 3/4 in.	6 oz.	4.09
9 GT 66911	13/64 in.	3 3/4 in.	3 oz.	\$1.09	9 GT 66925	7/16 in.	5 1/2 in.	6 oz.	4.39
9 GT 66912	7/32 in.	3 1/2 in.	3 oz.	1.19	9 GT 66926	1/2 in.	5 3/4 in.	6 oz.	4.49
9 GT 66913	15/64 in.	3 3/4 in.	3 oz.	1.29	9 GT 66935	1/2 in.	5 3/4 in.	5 oz.	4.69
9 GT 66914	1/4 in.	4 in.	4 oz.	1.39	9 GT 66927	31/64 in.	5 7/8 in.	7 oz.	5.19
9 GT 66915	17/64 in.	4 1/8 in.	4 oz.	1.59	9 GT 66928	1/2 in.	6 in.	7 oz.	5.49
9 GT 66916	9/32 in.	4 1/4 in.	4 oz.	1.69					

(3) Metric Individual Drill Bits SIZES AND ORDERING INFORMATION:

Catalog Number	Diameter	Length	Shpg. wt.	Each
9 GT 66951	3.3mm	2 1/8 in.	4 oz.	59c
9 GT 66952	4.1mm	3 1/4 in.	4 oz.	74c
9 GT 66953	4.2mm	3 1/4 in.	3 oz.	79c
9 GT 66954	5.0mm	3 3/4 in.	3 oz.	99c
9 GT 66955	6.0mm	4 in.	3 oz.	\$1.29
9 GT 66956	6.7mm	4 1/8 in.	3 oz.	1.49
9 GT 66957	7.7mm	4 1/2 in.	3 oz.	2.09
9 GT 66958	8.0mm	4 1/2 in.	3 oz.	2.19
9 GT 66959	8.5mm	4 1/2 in.	3 oz.	2.59
9 GT 66961	8.7mm	4 1/2 in.	3 oz.	2.69
9 GT 66962	9.0mm	4 1/2 in.	3 oz.	2.79
9 GT 66963	10.5mm	5 1/8 in.	4 oz.	3.99
9 GT 66964	12.0mm	5 3/4 in.	5 oz.	4.99
9 GT 66965	12.8mm	6 in.	5 oz.	6.99
9 GT 66966	14.0mm	6 3/4 in.	5 oz.	7.99

(4) Individual Short-length Bits. Turned-down shanks fit 1/4, 3/8, 1/2-inch drills.

SIZES AND ORDERING INFO:	
1/4-inch diameter. Wt. 2 oz.	9 GT 66364 \$2.29
3/8-inch diameter. Wt. 2 oz.	9 GT 66365 2.49
1/2-inch diameter. Wt. 3 oz.	9 GT 66366 3.49
3/4-inch diameter. Wt. 4 oz.	9 GT 66367 3.99

(5) Individual Large-diameter Bits. Turned-down shanks fit 1/2-inch electric drills. Six inches long.

SIZES, ORDERING INFO:	
3/4-inch diameter. Wt. 8 oz.	9 GT 67151 \$8.99
1-inch diameter. Wt. 9 oz.	9 GT 67152 \$10.99
1 1/2-inch diameter. Wt. 13 oz.	9 GT 67153 \$16.99

(6) Steel Bit Case For 29-piece jobber length sets. Lifting lid raises bits. Sizes by 64ths; decimal equivalents. Gray. Meets Federal Specifications GGG-C-116b for durability.

ORDERING INFO:
Shpg. wt. 1 lb. 6 oz.
9 GT 66852 \$2.99

(7) CRAFTSMAN All-steel Bit Case Size and decimal equivalents. Tap drill table. Silver-color, black enamel finish. Meets Federal Specifications GGG-C-116b for durability.

CAPACITIES AND ORDERING INFO:
For 29 Bits. 1/16 to 1/2-in. by 64ths.
9 GT 6678—Shpg. wt. 3 lbs. 3 oz. \$10.99
For 60-wire Bits. Sizes 1 to 60.
9 GT 6679—Shpg. wt. 1 lb. 11 oz. \$9.99

Electricians' Bits and Woodboring Bits

(8) CRAFTSMAN Electricians' Bits. Carbon steel. For drilling in wood only. 18-inches long. Drills in walls, floors.

SIZES AND ORDERING INFORMATION:
1/4-inch diameter. Fits 1/4, 3/8, 1/2-inch chucks.
9 GT 66931—Shipping weight 8 ounces \$6.49
3/8-inch diameter. Fits 3/8-inch and larger chucks.
9 GT 66932—Shipping weight 12 ounces 8.99
1/2-inch diameter. Fits 1/2, 3/4, 1-inch and larger chucks.
9 GT 66933—Shipping weight 14 ounces 14.99

(9) 12-pc. CRAFTSMAN Wood Screw Pilot Bit Set

To countersink and counterbore.
SIZES: For Nos. 4, 5 screws (1/2, 3/8, 3/4 in. deep); for Nos. 6, 7 screws (5/8, 3/4, 1 in. deep); for Nos. 8, 9 screws (3/4, 1, 1 1/4 in. deep); for Nos. 10, 11, 12 screws (1, 1 1/4, 1 1/2 in. deep).
ORDERING INFORMATION:
9 GT 4201—Shipping weight 13 ounces Set \$7.99

(10) 11-pc. CRAFTSMAN Power Woodboring Bit Set

Hardened steel alloy. 6 1/2-in. long. Precision-ground cutting edges, surfaces. Brad pts. for no-jump starts. For 1/4, 3/8, 1/2-in. drill, drill press. Incl. vinyl storage pouch.
SIZES: 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 1, 1 1/4, 1 1/2, 1 3/4-inches.
ORDERING INFO: Wt. 1 lb. 12 oz.
9 GT 2099 Set \$15.99

6-pc. CRAFTSMAN Power Woodboring Bit Set (not shown).

SIZES: 3/8, 1/2, 5/8, 3/4, 7/8, 1-inch.
9 GT 2092—Wt. 14 oz. Set \$8.49


(11) 7-pc. Woodboring Bit Set. Precision-ground . . . bores up to 5 inches deep. For 1/4-in. or larger electric drills. Plastic pouch. Imported.

SIZES: 3/8, 1/2, 5/8, 3/4, 7/8, 1, 1 1/4-inch.
ORDERING INFORMATION:
9 GT 2087—Shipping weight 1 pound Set \$6.99
4-piece Set (not shown). Imported.
SIZES: 3/8, 1/2, 5/8, 3/4, 1-inch.
9 GT 2086—Shipping weight 9 ounces Set \$4.99


Individual Power Woodboring Bits

SIZES, ORDERING INFORMATION:

Catalog no.	Size	Wt.	Each
9 GT 2093	3/8 in.	4 oz.	\$1.29
9 GT 2094	1/2 in.	4 oz.	1.39
9 GT 2095	5/8 in.	4 oz.	1.49
9 GT 2096	3/4 in.	4 oz.	1.59
9 GT 2097	7/8 in.	4 oz.	1.69
9 GT 2098	1 in.	4 oz.	1.79
9 GT 20982	1 1/8 in.	4 oz.	1.99
9 GT 20983	1 1/4 in.	5 oz.	2.09
9 GT 20984	1 1/2 in.	4 oz.	1.09
9 GT 20985	1 3/4 in.	6 oz.	2.19
9 GT 20986	1 7/8 in.	8 oz.	2.09



Bits for Masonry and Non-Ferrous Metals



(12 thru 14) CRAFTSMAN Masonry, Non-ferrous Metal-boring Bits

Tungsten-carbide tips drill brick, stone, concrete, wall-board, cast-iron. Special flutes remove chips. Pouch included.

(12) 7-pc. Bit Set

SIZES: 3/16x3, 1/4x4, 5/16x4, 3/8x4-inch; 1/2-inch shanks. 1/2x6, 5/8x6, 3/4x6-inch; 3/4-inch shanks.

ORDERING INFORMATION:
Shpg. wt. 1 lb. 8 oz.
9 GT 67347 Set \$10.99

(13) 5-pc. Bit Set

SIZES: 3/16x3, 1/4x4, 5/16x4, 3/8x4, 1/2x4-in.; 1/2-in. shanks.

ORDERING INFORMATION:
Shpg. wt. 8 oz.
9 GT 67344 Set \$4.99

Individual Carbide-tipped Bits

SIZES, ORDERING INFORMATION:

Catalog Number	Size in.	Shank in.	Length in.	Wt. oz.	Each
9 GT 67085	3/16	1/8	3	3	89c
9 GT 67328	1/4	1/4	4	2	\$1.09
9 GT 67087	5/16	1/4	4	3	1.29
9 GT 67086	3/8	1/4	4	4	1.39
9 GT 67325	1/2	3/8	6	6	1.89
9 GT 67088	5/8	3/8	6	9	2.99
9 GT 67089	3/4	3/8	6	10	3.49


(14) CRAFTSMAN Impact Masonry Drill Bits

6-inch long carbide-tipped masonry drill bits for use in percussion drills (also in standard variable speed electric drills). Heat-treated shanks. Milled flute shape. Fits 3/8-in. chuck and larger, except 9 GT 67385 fits all 1/2-in. and larger.

SIZES, ORDERING INFORMATION:
1/4-in. Shipping weight 3 oz.
9 GT 67385 \$1.99
3/8-in. Shipping weight 4 oz.
9 GT 67386 \$2.49
1/2-in. Shipping weight 4 oz.
9 GT 67387 \$2.99
3/4-in. Shipping weight 6 oz.
9 GT 67388 \$3.49

There's a wide selection of drills on pages 54, 62 and 63; drill presses on pages 12, 24-26, 61, 121.

Accessories to Buff, Sand and Polish

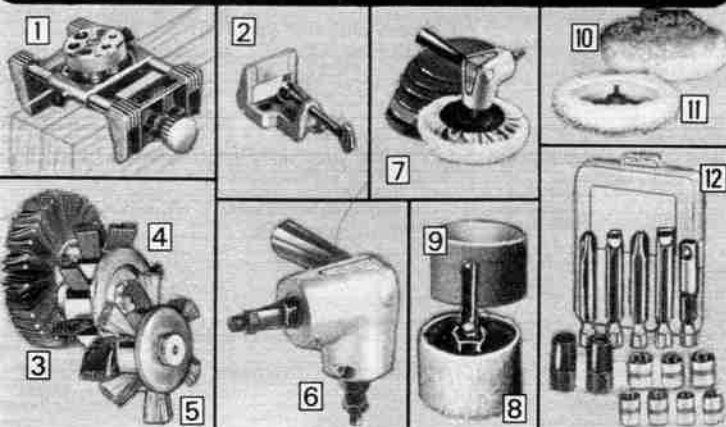

(1) CRAFTSMAN® Doweling Jig. Allows straight drilling and precision alignment of holes used for joining wood with dowel rods. Holes for $\frac{3}{16}$ through $\frac{1}{2}$ -in. drill bits. Revolving turret, 4-in. capacity. $6\frac{1}{4} \times 3 \times 2\frac{3}{4}$ -in. cast aluminum alloy frame.
9 GT 4186—Wt. 2 lbs. 7 oz. ... \$15.99

(2) Doweling Jig Kit. KIT INCLUDES: Jig, cast-alum., steel guide bushings. Holes for $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$ -in. drill bits. Accepts wood up to 2-in. thick. *Dowels*, 25 each $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$ -in. **ORDERING INFORMATION:**
9 GT 4187—Wt. 15 oz. ... \$9.99

(3) Flap Wheels. Remove rust, sand wood. Use for contour sanding. Fits $\frac{1}{4}$, $\frac{3}{8}$ -in. drill or drill press with use of adapter, sold separately below. Also fits bench grinders.

CONST: Steel side flanges, abrasive cloth flaps. Flaps 6x1-in. $\frac{1}{2}$ -in. hole. **GRIT, ORDERING INFORMATION:**
Coarse. Shpg. wt. 13 oz. 9 GT 64851 ... \$6.99
Medium. Shpg. wt. 13 oz. 9 GT 64852 ... 7.49
Fine. Shpg. wt. 13 oz. 9 GT 64853 ... 7.99

Chuck Adapter for (3). Not shown. Mounts in $\frac{1}{4}$ or $\frac{3}{8}$ -in. chuck of portable drill or drill press.
9 GT 64854—Wt. 4 oz. ... \$1.29

(4) Heavy-duty Contour Sander. Cushioning brushes force abrasive strips into, around and over corners, small openings, convex and concave surfaces. Incl. wheel with $\frac{1}{2}$ -in. reducer bushing, abrasive coil, adapter for $\frac{1}{4}$ or $\frac{3}{8}$ -in. drill chuck. 8 brushes. 6-in. diam. 1-in. wide abrasive strips.

ORDER INFO: Order refills below.
9 GT 64861—Wt. 2 lbs. 2 oz. ... \$16.99

Abrasive refills for (4), above. **GRIT, ORDERING INFORMATION:**
Coarse. 80 grit. 9 GT 64862—Shpg. wt. 5 oz. ... \$1.99
Medium. 120 grit. 9 GT 64863—Shpg. wt. 5 oz. ... 2.49
Fine. 180 grit. 9 GT 64864—Shpg. wt. 5 oz. ... 2.49

(5) Medium-duty Contour Sander. Permanent steel shank for use with $\frac{1}{4}$ and $\frac{3}{8}$ -in. drills. 6 brushes, 5-in. overall diameter. $\frac{3}{4}$ -in. wide abrasive strips. **ORDERING INFO:** Order refills below.
9 GT 64871—Wt. 1 lb. 10 oz. ... \$10.99

Abrasive refills for (5), above. **GRIT, ORDERING INFORMATION:**
Coarse. 80 grit. 9 GT 64872—Shpg. wt. 5 oz. ... \$1.69
Medium. 120 grit. 9 GT 64873—Shpg. wt. 5 oz. ... 1.69
Fine. 180 grit. 9 GT 64874—Shpg. wt. 5 oz. ... 1.69

(6) Angle Drill Head. For hard-to-get-at places. Fits $\frac{1}{4}$ or $\frac{3}{8}$ -in. electric drills. Works at 90° angle. High-impact plastic housing. 2-position side-handle. 1:1 ratio.
9 GT 26271—Wt. 1 lb. 10 oz. ... \$6.99

(7) Sander-Polisher-Buffer. Fits $\frac{1}{4}$, $\frac{3}{8}$ -in. drills. Threads on $\frac{3}{4} \times 24$ -chuck spindle. High-impact plastic housing. 2:1 gear ratio for polishing, 1:1 for sanding. **SET COMPOSITION:** 2 position side handle, chuck adapter, 5-in. rubber back-up pad, wool polishing bonnet, 6 assorted sanding discs. **ORDERING INFO:** Wt. 2 lbs. 4 oz. 9 GT 26272 ... Set \$8.99

(8) Sanding Drum. Use with safelock or collet chuck; 1-in. face, $\frac{1}{4}$ -in. plain spindle, $\frac{1}{2}$ -in. long. Abrasive sleeve over expanding rubber drum. **SIZE AND ORDERING INFO:** Use with (9), below.
1½-inch diameter. Wt. 5 oz. 9 GT 2497 ... \$2.99
2½-inch diameter. Wt. 8 oz. 9 GT 2498 ... 3.99

(9) Sanding Sleeve. Use with (8), above. $1\frac{1}{2}$ -inch diameter. **GRIT, ORDER INFO:** Pkg. of 6. 9GT24421—*Fine.* Wt. 3 oz. ... Pkg. \$1.29
9GT24422—*Med.* Wt. 3 oz. ... Pkg. 1.29
9GT24423—*Coarse.* Wt. 4 oz. ... Pkg. 1.29

Sanding Sleeve (not shown). $2\frac{3}{16}$ -inch diameter. Medium grit. **ORDERING INFO:** Pkg. of 6. 9 GT 24425—Wt. 4 oz. ... Pkg. \$1.29

(10) CRAFTSMAN 100% Lambs' Wool Polishing Bonnets. Fits over rubber back-up discs (not included). **SIZES AND ORDERING INFO:**

Catalog No.	Fits discs	Pile size	Wt.	Ea.
9 GT 2520	$3\frac{1}{2}$ to 4 in.	1-inch	3 oz.	.89c
9 GT 2521	4 to 5½ in.	1-inch	3 oz.	1.39
9 GT 2527	6 inches	1-inch	4 oz.	1.99
9 GT 2528	7 inches	1½-inch	5 oz.	2.49

(11) CRAFTSMAN Buffing Pad. Lamb's wool polishing bonnet. Plastic back-up pad. $\frac{1}{4}$ -inch spindle fits directly into all drill chucks. **ORDERING INFO:** 5-in. diameter. 9 GT 64935—Wt. 6 oz. ... \$2.49

(12) Screwdriver Bit and Socket Set. For $\frac{1}{4}$ -in. larger electric drills. Incl. two spade bits with finders for Nos. 6 thru 10 slotted screws; Phillips bits Nos. 1, 2; adapter for $\frac{1}{4}$ -in. sq. drive; seven 6-pt. sockets (sizes $\frac{3}{16}$ to $\frac{1}{2}$ -in.). $\frac{1}{4}$ -in. hex shank. Plastic case. **ORDER INFO:** CRAFTSMAN except sockets. Replacement bits below. 9 GT 25651—Wt. 10 oz. ... Set \$5.99

Screwdriver Bit Set. For $\frac{1}{4}$ -in. larger electric drills. Incl. 2 spade bits with finders for Nos. 6 thru 10 slotted screws; Phillips bits Nos. 1, 2; adapter for $\frac{1}{4}$ -in. sq. drive. Plastic case. **ORDER INFO:** Replacement bits below. 9 GT 2565—Wt. 8 oz. ... Set \$3.99

Phillips Replacement Bits. Wt. 3 oz. 9GT2581—No. 1. Pkg. of 2 ... Pkg. \$1.49
9GT2583—No. 2. Pkg. of 2 ... Pkg. 1.49

Slotted Screwdriver Bits. Wt. 3 oz. 9 GT 2585—*Small.* Pkg. of 2. Pkg. \$1.49
9 GT 2587—*Large.* Pkg. of 2. Pkg. 1.49

Drill Bit Sharpeners


(13 and 14) For use with CRAFTSMAN and other drill bits. Accepts sizes $\frac{1}{8}$, $\frac{9}{64}$, $\frac{3}{32}$, $\frac{11}{64}$, $\frac{3}{16}$, $\frac{7}{32}$, $\frac{1}{4}$, $\frac{5}{32}$, $\frac{3}{16}$, $\frac{11}{32}$, and $\frac{1}{2}$ -in. Resharpens dull or broken carbon and high-speed steel twist drill bits. *Not for carbide-tipped bits.*

(13) Drill-operated bit Sharpener **HOW TO OPERATE:** Your drill provides the power. Tighten drill chuck around shaft at sharpener bottom, place bit through proper-sized hole at top, turn on drill. Fits most makes of $\frac{1}{4}$ or $\frac{3}{8}$ -in. drills (drills not incl.). **ORDERING INFORMATION:** 9 GT 6680—Wt. 2 lbs. 9 oz. ... \$14.99

(14) Electric bit Sharpener **HOW TO OPERATE:** Place bit through proper-sized hole and apply pressure to sharpen automatically. Motor develops $\frac{1}{2}$ HP at 3000 rpm. **ELEC INFO:** Double-insulated. 110-120-volts, 60 Hz. AC. 75 watts. UL listed. 5-foot, 2-wire cord. **ORDERING INFORMATION:** 9 GT 6682—Wt. 2 lbs. 9 oz. ... \$29.99

(15) Heavy-duty drill Bit Sharpener **CONSTRUCTION:** Self-contained wheel-dressing system with diamond-tipped dresser. Heavy-duty ball-bearing induction-type motor. Calibrated feed control. $11\frac{3}{4} \times 9\frac{1}{2} \times 8\frac{3}{8}$ -in. high. **HOW TO OPERATE:** Lock $\frac{1}{8}$ to $\frac{1}{2}$ -in. bit into swinghead and lower to sharpening position. Knob controls bit feed to sharpener. *Not for carbide-tipped bits.* **ELEC INFO:** No-load speed of 3550 rpm. Double-insulated. 110-120-volts, 60 Hz. AC. UL listed. **ORDERING INFORMATION:** 9 GT 6684C—Wt. 19 lbs. ... \$148.88

(13 and 14) Sharpen up to a ½-inch drill bit

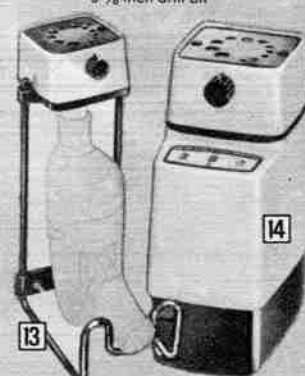

Drill-operated Bit Sharpener

\$14.99

Electric Bit Sharpener

\$29.99

New at Sears! Sharpen up to ½-inch drill bit

\$148.88



(16) CRAFTSMAN 5-pc. Screw Extractor Set. Nos. 1 thru 5 square shanks. Steel alloy. Plastic case. **ORDERING INFO:** Shpg. wt. 7 oz. 9 GT 67372 ... Set \$5.99

(17) Drill Press Work Arbor. Fits into $\frac{1}{2}$ -inch drill chuck, has $\frac{1}{2}$ -20 threads. Use with buffing wheels up to 8 in. diameter, or with sanding drum 25246 sold on p. 22. **ORDERING INFORMATION:** 9 GT 24645—Wt. 8 oz. ... \$3.99

(18) Hole Saw Attachment. Heat-treated steel. For cutting wood, plastics, wallboard, plumbing. Use with mandrels (19) below. **SIZES AND ORDERING INFO:**

Catalog No.	Size	Shpg. wt.	Price
9 GT 2578	$\frac{3}{4}$ -in.	4 oz.	\$1.49
9 GT 25781	1-in.	4 oz.	1.59
9 GT 25782	1½-in.	4 oz.	1.69
9 GT 25783	1¾-in.	5 oz.	1.69
9 GT 25784	1½-in.	5 oz.	1.79
9 GT 25785	1¾-in.	5 oz.	1.89
9 GT 25786	1½-in.	5 oz.	1.89
9 GT 25787	2-in.	6 oz.	1.99
9 GT 25788	2½-in.	6 oz.	2.09
9 GT 25789	2½-in.	6 oz.	2.19

5-pc. Hole Saw Kit. Includes $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$, $2\frac{1}{8}$ -inch hole saw attachments in (18) above, Size 2 mandrel in (19) below. **ORDERING INFORMATION:** 9 GT 28787—Wt. 15 oz. ... Kit \$8.99

(19) Mandrels for Hole Saw Attachments. (18) above, $\frac{1}{4}$ -in. shanks. Size 1 for $\frac{3}{4}$ to $1\frac{1}{2}$ -in. saws. Size 2 for $1\frac{1}{4}$ to $2\frac{1}{2}$ -in. saws. Includes pilot bit. **SIZES, ORDERING INFO:** Wt. 5 oz. 9 GT 2562—*Size 1* ... \$3.49
9 GT 25621—*Size 2* ... 3.99

(20) Heavy-duty Hole Saw Attachment. High-speed hole saws cut machineable steel, brass, plastics, wood, aluminum, iron. Use with (21) below. Knock-out slots. **SIZES AND ORDERING INFO:**

Catalog No.	Size	Shpg. wt.	Price
9 GT 2577	$\frac{3}{4}$ -in.	4 oz.	\$3.29
9 GT 25771	$\frac{1}{2}$ -in.	4 oz.	3.29
9 GT 25772	1-in.	5 oz.	3.59
9 GT 25773	1½-in.	5 oz.	3.69
9 GT 25774	1¾-in.	6 oz.	3.89
9 GT 25775	1¾-in.	6 oz.	3.99
9 GT 25776	1½-in.	7 oz.	4.49
9 GT 25777	1¾-in.	6 oz.	4.99
9 GT 25778	2-in.	7 oz.	5.49
9 GT 25779	2½-in.	8 oz.	6.49

6-pc. Hole Saw Kit. Incl. $1\frac{1}{2}$, $1\frac{3}{4}$, 2, $2\frac{1}{2}$ -in. hole saw attachments in (20) above; size 2 mandrel; red plastic case. Wt. 2 lbs. 2 oz. 9 GT 25761 ... Kit \$19.99

(21) Mandrels for Hole Saw Attachments (20) above. Size 1 has $\frac{3}{8}$ -inch shank for $\frac{3}{4}$ to $1\frac{1}{2}$ -in. diam. saws. Size 2 has $\frac{1}{2}$ -in. shank for $1\frac{1}{4}$ to $2\frac{1}{2}$ -in. diam. saws. Pilot drill bit. **SIZES AND ORDERING INFO:**

Catalog No.	Size	Shpg. wt.	Price
9 GT 25626	No. 1	5 oz.	\$3.29
9 GT 25627	No. 2	6 oz.	4.29

Replacement Pilot Bit for (21). 9 GT 25629—Wt. 3 oz. ... \$1.49

(22) CRAFTSMAN High-speed Countersink Bit. Machined steel, ctrlless ground. Cut wood, metal. 5 flutes, 82° angle; $\frac{1}{4}$ -in. shank. **SIZES AND ORDERING INFO:**

Catalog No.	Diam.	Shpg. wt.	Price
9 GT 67161	$\frac{1}{2}$ -in.	3 oz.	\$4.49
9 GT 67162	$\frac{3}{8}$ -in.	4 oz.	4.99
9 GT 67163	$\frac{1}{4}$ -in.	4 oz.	5.49



CRAFTSMAN® Tool Cases

With sturdy polyethylene walls
...won't rust, crack or
dent even in extreme temperatures

SHOWN ON OPPOSITE PAGE

(7 thru 10) Drill Stands and Vise

(7) Heavy-duty Drill Stand

For all 1/4, 3/8 and 1/2-inch drills.
COLUMN, BASE: Tubular-steel column, 20 inches high.
Adjustable rack-and-pinion depth control locks from 0
to 2 1/2 inches. Throat depth 6 inches. Cast-aluminum
base is 7 1/2 x 7 1/2 inches.

SWING-AWAY TABLE: Tilts and locks in any position.
ORDERING INFORMATION: Unassembled. Drill and
vise not included.

9 GT 25987C—Shipping weight 17 pounds...\$49.99

Stand (7) plus Drill 9 GT 1149 keyed (5) on pg. 63.

Separate prices total \$119.49.

9 GT 11492C2—Shpg. wt. 27 lbs.\$109.49

Stand (7) plus Drill 9 GT 1051 keyed (2) on pg. 62.

Separate prices total \$99.49.

9 GT 10514C2—Shipping weight 21 lbs.\$94.49

(8) Medium-duty Drill Stand with 2 positions

Drill in vertical position; sand and grind in horizontal.
For 1/4 or 3/8-in. pistol-grip drills.

COLUMN, BASE: Tubular-steel column 18 in. high.
Locking depth gauge from 0 to 2 1/2 in. with automatic
return. Throat depth 4 1/2 in. Protective grinding guard.
Cast-aluminum base 6x6 inches.

SWING-AWAY TABLE: Tilts and locks in any position.
ORDERING INFORMATION: Unassembled. Drill is not
included.

9 GT 25926—Shipping weight 9 lbs. 2 oz. ...\$27.99

Stand (8) plus Drill 9 GT 1051 on pg. 62.

Stand unassembled. Separate prices total \$77.49.

9 GT 10515—Shipping weight 13 lbs. 2 oz. ...\$72.49

Stand (8) without swing-away table. Unassembled.

9 GT 25927—Shipping weight 8 lbs. 5 oz. ...\$19.99

9 GT 25927 above plus Drill 9 GT 1051 pg. 62.

Stand unassembled. Separate prices total \$69.49

9 GT 10516—Shipping weight 12 lbs. 5 oz. ...\$65.49

(9) Vise fits drill stands (7) and (8) above

Aluminum base. 4 inches long, 2-inch opening. Bolt to
drill stand. Bolts not included.

ORDERING INFORMATION:

9 GT 2597—Shipping weight 1 lb. 11 oz.\$12.99

(10) Portalign® Drill Stand

USES: Portalign® Drill Stand helps you make perfect
holes when cutting even the most difficult stock. Sturdy
steel and cast-aluminum construction provide support.
Lightweight enough to be easily hand-held. Fits
most 1/4 and 3/8-inch drills, except 9-1148. Drill at 90° to
the surface, or at precise angles. Allows your drill to be
used as a sander, shaper and drill press when using the
correct bits.

CONSTRUCTION: Adjustable depth control. Steel rods.
Cast-aluminum base.

ASSEMBLY: Remove chuck, attach drill into threaded
shaft of carriage.

ORDERING INFORMATION: Drill not included.

9 GT 11224—Shipping weight 2 lbs. 5 oz.\$19.99

(11 thru 13) Nail Spinner, Venting Tool and Vents

(11) Nail Spinner

USES: Nail Spinner sets in finishing nails without pre-
drilling. Cracking and splitting are less likely to occur
because pounding of nails is eliminated. Use for your
fine finishing tasks; trims, moldings, picture frames
and decorative pieces.

HOW IT WORKS: Unit chucks firmly into your 1/4 or
3/8-in. drill. Nail is gripped in place by an assembly of 3
balls. Use 4, 6, 8 or 10 penny finishing nails.

CONSTRUCTION: Heavy-duty steel.

ORDERING INFORMATION:

9 GT 2601—Shipping weight 5 ounces.\$4.99

(12) Venting Tool. Drills holes in siding so vents
(13) may be inserted. Tool positions electric drill at
proper angle to drill up through butt of siding.

CONSTRUCTION: Heavy-duty plastic, aluminum
bearings. Includes 3/8-inch bit.

ORDER INFORMATION: Use with 3/8-inch vents below.

30 GT 44716—Shipping weight 1 lb. 3 oz. ...\$11.49

Extra 3/8-inch Bit (not shown). 9 inches long.

30 GT 44719—Shipping weight 4 ounces.\$3.79

(13) Plastic 3/8-inch Vents. Insert in your home's
wood siding to help end paint blistering by allowing
trapped water vapor to escape. Includes inserting tool.
Package of 100 vents.

30 GT 44717—Shipping weight 4 oz.Pkg. \$2.99

Before painting your home's exterior, send for
FREE booklet 30 GT 7295. It explains causes of
blistering and mildew, and how to combat them
with items (12) and (13) sold above.

1 Multiple-tool Case \$24.50




Single-tool Case \$14.89



3 Circular Saw Case \$14.89




4

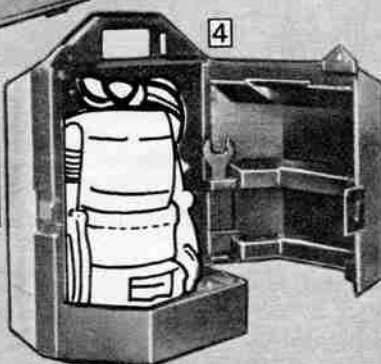

Router Case holds router compactly \$12.89

5 Sabre Saw or Drill and Pad Sander Case \$10.89

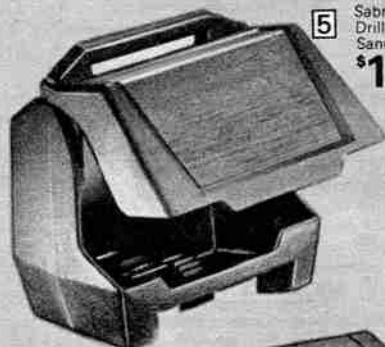

6

Electric- Impact tool Case \$10.89



CONSTRUCTION: Permanex®
polyethylene. Textured finish re-
sists soil, including oil, acid and
alkaline. Polyethylene is so tough,
it won't rust or crack even in ex-
treme heat or cold temperatures
from -84° to +185°F.

(1) Multiple-tool Case

Holds 1, 2 or 3 tools at one time,
depending on the size of your
tools. Fits sanders, polishers, elec-
tric hand saws, drills, routers and
most portable power tools sold in
this catalog; with the following
exceptions (9-1148, 9-1810, 9-
1811, 9-1813 or 9-1113). These
use carrying case (2) sold below.
Unit measures 21 1/2 x 12 1/2 x 12 3/4
inches high overall.

ORDERING INFORMATION:

Shipping weight 11 pounds.

9 GT 1457C\$24.50

(2) Single-tool Case

Holds power planer, standard 1/2-
in. drill, 3-in. belt sander, 4 1/2 x 9-
in. pad sander, reciprocating saw,
electric-impact tool or 6-in. disc
sander. Unit measures
17 3/4 x 9 3/4 x 10 1/16 inches overall.

ORDERING INFORMATION:

Shipping weight 3 lbs. 6 oz.

9 GT 1454\$14.89

(3) Circular Saw Case

Double-wall carry case, split inte-
gral handle, 2 heavy-duty latches.
Storage compartment holds saw,
plus attached rip guide. Separate
compartment for wrench. Secondary
storage for spare blades.
Measures 17x14x8 inches.

ORDERING INFORMATION:

Shipping weight 4 lbs. 12 oz.

9 GT 1464\$14.89

(4) Router Case

Double-wall carry case with inte-
gral top handle, heavy-duty latch.
Storage for standard and wing
bits, edge guide with rods and
wrench (not included). Measures
11 1/4 x 8 3/4 x 15 1/4 inches overall.
Fits routers sold on page 78.

ORDERING INFORMATION:

Shipping weight 3 lbs. 14 oz.

9 GT 1465\$12.89

(5) Sabre Saw or Drill and Pad Sander Case

Holds your sabre saw, drill or pad
sander. Compartment for sand
paper, blades and edge guides.
Helps to keep your accessories in
order. Measures 14 1/2 x 9 1/4 x 10 3/8
inches overall.

ORDERING INFORMATION:

Shipping weight 2 lbs. 13 oz.

9 GT 1459\$10.89

(6) Electric-Impact Tool Case

Fits electric-impact tools sold on
page 105 of this catalog.
16x13 1/2 x 5 inches high.

ORDERING INFORMATION:

Shipping weight 3 lbs. 14 oz.


9 GT 1456\$10.89

**Sears Has a
Credit Plan
to Suit Most
Every Need**

See Big Book
or ask
for details

CRAFTSMAN® Drill Stands

Rigid tubular steel columns and die-cast aluminum bases let you convert your drill to a drill press for great accuracy in precision drilling tasks

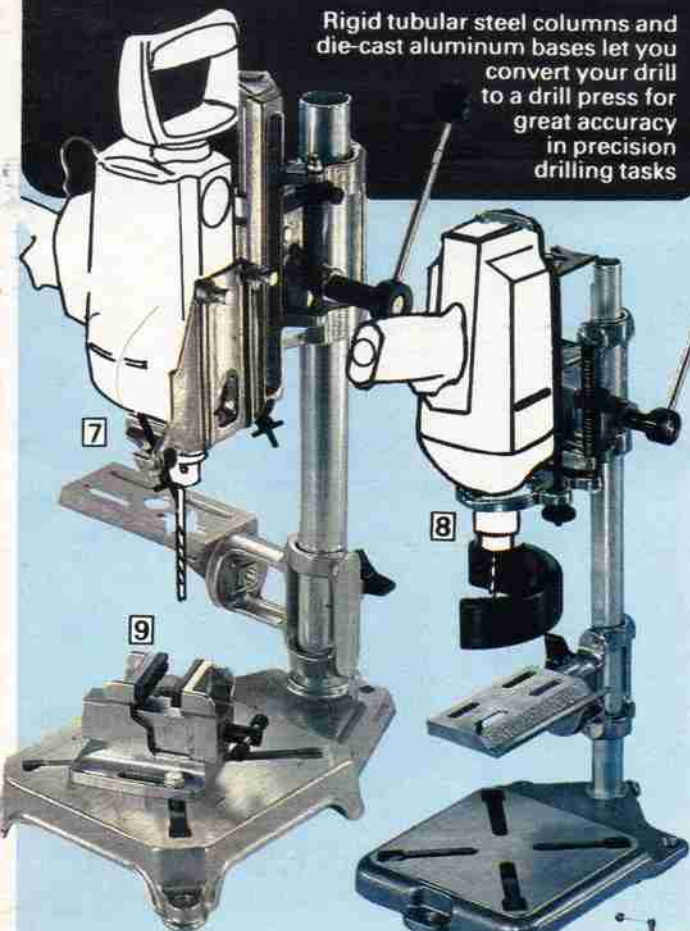

Heavy-duty Stand for all 1/4, 3/8 and 1/2-inch drills

\$49⁹⁹ without drill or bits

Medium-duty Stand for 1/4 and 3/8-inch pistol-grip drills

\$27⁹⁹ without drill or bits

Stand adjusts to horizontal

Portalign® Drill Stand

Holds portable 1/4 and 3/8-inch drills steady, for accurate perpendicular and exact-angle holes... even on very narrow stock





Center precisely on round stock

Provides support for angle drilling

Installs locks in doors

Without drill **\$19⁹⁹**

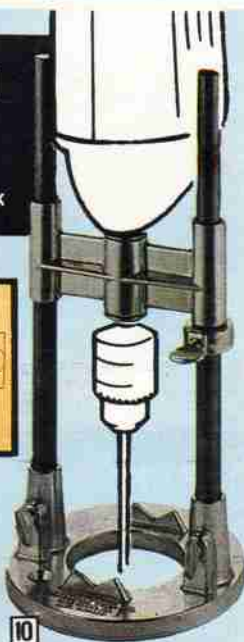

Nail Spinner attachment helps you set finishing nails quickly and cleanly



Venting Tool lets you drill holes in siding to release moisture and help stop paint blistering



Plastic Vents

CRAFTSMAN® Light-duty Drill Press

With double-insulated motor develops maximum 1/3 HP

- Front-mounted slide action control for variable speeds from 1000 to 2000 rpm
- Automatic speed regulator

\$69⁵⁰ Without vise or bits

(14) CRAFTSMAN® Portable 3/4-inch Drill Press

MOTOR, HOUSING: Develops maximum 1/3 HP with variable speeds of 1000 to 2000 rpm. Automatic regulator maintains speed under heavy loads. Motor housing of high-impact polymer. Drill press has sleeve bearing construction.

HEAD, COLUMN, BASE: Locking depth gauge with 0 to 3 3/4-inch depth range. Safety lock on 18-in. steel column. Slotted die-cast aluminum base, rubber bushings. Handle mounts on right or left-hand side of drill. Storage tray at top of press for drill bits, measures 6x3 3/4x1 inch deep.

ELECTRICAL INFO: Double-insulated... no grounding needed. 110-120 v. 285 w. 60 Hz. AC. UL listed. 6-ft., 2-wire cord.

ORDERING INFO: Vise, bits not included. See Warranty, page 63. Shipping weight 9 lbs. 2 oz.

9 GT 1197 **\$69.50**

(15) Vise. Bolt to drill press (bolts not included). Steel jaws open to 3 inches. Cast-iron base. 8 inches long.


ORDER INFO: Shpg. wt. 8 lbs. 2 oz. 9 GT 2757 **\$21.99**

Play it Safe! Wear protective goggles or glasses when using drill accessories on these 2 pages. See safety equipment on page 57.



For heavier jobs see drill presses on page 12


YOU CAN DO IT

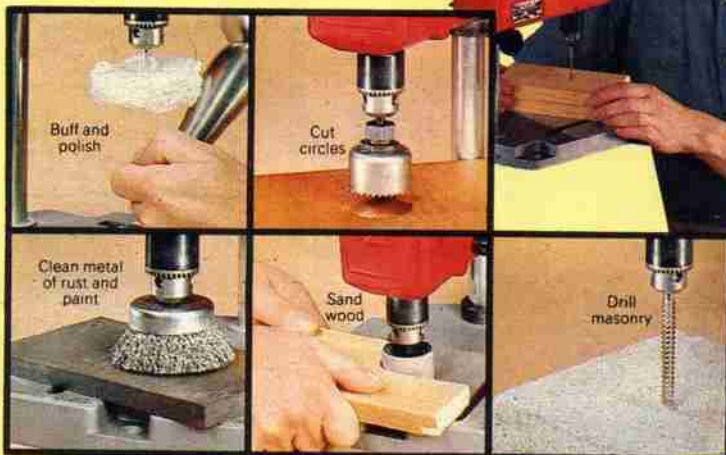


... with CRAFTSMAN® versatile Motorized Drill Press and accessories sold on pages 58 and 59. The polishing bonnet fitted over your CRAFTSMAN® Motorized Drill Press lets you do wood polishing and by using a circle cutter, you can remove a plug from your workpiece. Drill fast, clean holes in wood or wood-product materials with your wood boring bits and attach a wire brush to your CRAFTSMAN® Motorized Drill Press to clean metal and remove paint. The sanding drum will allow surface finishing and you can even drill masonry with special bits. You'll be surprised at what you can do with your CRAFTSMAN® Motorized Drill Press and accessories. All you need is a little know-how and you can do it!



YOU CAN DO IT




Dowel



Cut holes



Drive screws



Remove rust



Polish

... with Craftsman Portable Electric Drills and Accessories. Choose variable-speed or single-speed. . . . Sears sells the drill you need, whether it's for lightweight home repairs or heavy-duty applications. Add the accessories sold on pages 58 and 59 and your drill can become the most versatile tool you own. Make straight drill holes for dowseling with our Doweling Jig. Cut holes with our Hole Saw Attachment. Drive in or reverse out screws with our Screwdriver Bit Set. Or, chuck in one of our Wire Cup Brushes and efficiently clean rust or remove paint. With our buffing pads you can polish a finish to a shiny gloss. You'll be surprised at what you can do with your Craftsman Portable Electric Drill and Accessories. All you need is a little know-how and you can do it!

CRAFTSMAN® 3/8-inch Variable-speed Drills

THE RIGHT DRILLS for sanding, polishing, grinding and working in masonry

- Variable-speeds from 0 to 1200 rpm
- Reversible for removing screws, bits



1 1/2 HP

\$29⁵⁰

- Spur gearing
- Ball thrust and sleeve bearings



2 1/2 HP

\$49⁵⁰

- Spur gearing
- Ball and sleeve bearings
- Drop handle fits easily into hand

Sears * Best



3 3/4 HP

\$59⁵⁰

- Helical, spur gearing for smooth, quiet power transmission
- Ball and roller bearings for long life
- Top assist handle

(1) 1/2 HP,

Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/2 HP. Permanently lubricated ball thrust and sleeve bearings. Double-reduction spur gearing. Pressure on trigger controls variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation . . . releases quickly. Reversing switch for backing out stuck screws and bits.

CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-inch x 24 spindle.

HOUSING: Thermoset polyester construction.

ELECTRICAL INFORMATION: Double-insulated. Runs on 110-120-volt, 60-Hertz AC. 264 watts. UL listed. With six-foot, 2-wire cord.

ORDERING INFO: See warranty, Safety Note on opposite page. Wt. 3 lbs. 15 oz.

9 GT 1144 \$29.50

Non-reversible 1/2 HP Drill (not shown). As above, but non-reversible.

Shpg. wt. 3 lbs. 10 oz.

9 GT 1143 \$19.99

(2) 1/2 HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/2 HP. Permanently lubricated ball and sleeve bearings. Double-reduction spur gearing for smooth and quiet power transmission. Externally accessible motor brushes. Pressure on trigger controls variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation and releases quickly. Reversing switch for backing out screws and bits.

CHUCK: Drill chuck has 3/8-inch capacity. Geared chuck threaded for 3/8-inch x 24 spindle.

HOUSING: Glass-reinforced thermoset polyester motor housing and die-cast aluminum gear housing.

ELECTRICAL INFORMATION: Double-insulated. Runs on 110-120-volt, 60-Hertz AC. 300 watts. UL listed. With 6-foot, 2-wire cord.

ORDERING INFO: See warranty, Safety Note on opposite page. Shipping weight 4 pounds.

9 GT 1051 \$49.50

1/2 HP Drill. Like variable-speed drill above except with ball, thrust and sleeve bearings, stamped cup chuck. Motor develops 1/4 HP.

Shipping weight 4 pounds.

9 GT 1049 \$39.50

(3) 3/4 HP,

Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 3/4 HP. Permanently lubricated ball and roller bearings for long life. Double-reduction helical, spur gearing for smooth, quiet power transmission. Externally accessible motor brushes. Pressure on trigger control gives variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operations . . . releases quickly. Reversing switch for backing out screws and bits.

CHUCK: Drill chuck has 3/8-inch capacity. Geared chuck threaded for 3/8-inch x 24 spindle. Pin-type spindle lock allows quick and easy chuck removal.

HOUSING: Glass-reinforced thermoset polyester motor housing; die-cast aluminum gear housing. Includes removable top-assist handle for 2-hand control.

ELECTRICAL INFORMATION: Double insulated. 110-120-volt, 60-Hertz AC. 360 watts. UL listed. Six-foot, 2-wire neoprene cord.

ORDERING INFO: See warranty, Safety Note on opposite page.

Shipping weight 5 lbs. 9 oz.

9 GT 1148 \$59.50

CRAFTSMAN® 3/8-inch Rotary Hammer Drill

THE RIGHT DRILL for tough drilling jobs in aggregate concrete



Rotary Hammer Drill

\$69⁵⁰

Hammer action gets the job done faster than 1/2-inch rotary drills

To change action: just pull out indicator ring and twist to rotary or hammer action

Rotary-drill in wood, plastic, light metals. Hammer-drill at 21 impacts per revolution in brick, concrete, tile, stone. (Bit not included.)

MOTOR, BEARINGS, GEARS: Develops max. 3/4 HP. Permanently lubricated ball, roller, sleeve bearings. Double reduction helical, spur gearing. Variable speeds, 0 to 1200 rpm, no load. Trigger locks. Reversible for backing out stuck bits, screws.

CHUCK: Has 3/8-in. capacity. Geared chuck threaded for 3/8-inch x 24 spindle. Pin-type spindle lock for quick chuck removal.

HOUSING: Glass-reinforced thermoset polyester motor housing, aluminum gear housing. Adjustable depth gauge mounted on side.

ELECTRICAL INFO: Double insulated. Runs on 110-120-volt, 60-Hertz AC. 384 watts. UL listed. Has 6-foot, 2-wire neoprene cord.

ORDERING INFO: See warranty and Safety Note on opposite page.

9 GT 1811—Shipping weight 6 pounds 7 ounces \$69.50

CRAFTSMAN® Single-speed Drills

THE RIGHT DRILLS for
lightweight home repairs



(1) 3/8-in. Single-speed Drill
MOTOR, BEARINGS, GEARS: Develops maximum 1/4 HP. Single, no-load speed of 1200 rpm. Permanently lubricated ball thrust, sleeve bearings. Double reduction spur gearing.
CHUCK: 3/8-in. cap. Geared chuck threaded for 3/8-in. x 24 spindle.
HOUSING: Thermoset polyester.
ELEC INFO: Double insulated. 110-120 v., 60 Hz., AC. 264 w. UL listed. 6-ft., 2-wire cord.
ORDER INFO: Warranty, safety note below. Wt. 3 lbs. 10 oz. 9 GT 1142 \$10.99

(2) 1/2-in. Single-speed Drill
MOTOR, BEARINGS, GEARS: Develops maximum 1/4 HP. Single no-load speed of 2000 rpm. Ball thrust, sleeve bearings. . . permanently lubricated. Double-reduction spur gearing.
CHUCK: 1/2-in. cap. Geared, threaded for 1/2-in. x 24 spindle.
HOUSING: Thermoset polyester.
ELECTRICAL INFO: Double-insulated. 110-120 v., 60 Hz., AC. 240 w. UL listed. 6-ft., 2-wire cord.
ORDER INFO: Warranty, safety note at right. Wt. 3 lbs. 10 oz. 9 GT 1140 \$7.79

CRAFTSMAN® 1/2-inch Single-speed Drills

THE RIGHT DRILLS for heavy-duty drilling

- in brick, concrete, steel
- Top-assist handles for 2-hand control
- Reversible, for backing out bits



(3) 1/4 HP, Single-speed Drill
MOTOR, BEARINGS, GEARS: Motor develops maximum 1/4 HP. Single, no-load speed of 525 rpm. Permanently lubricated ball thrust and sleeve bearings. Triple-reduction spur gearing. Trigger switch locks for continuous operation . . . releases quickly. Reversing switch for backing out stuck bits. Pin-type spindle lock.
CHUCK: 1/2-inch cap. Geared chuck threaded for 1/2-in. x 20 spindle.
HOUSING: Hi-impact polymer motor housing; die-cast aluminum gear housing. Top assist handle for two-hand control, removes quickly.
ELECTRICAL INFORMATION: Double insulated; needs no grounding. 110-120-volts, 60 Hertz, AC. 360 watts. UL listed. Six-foot, 2-wire cord.
ORDERING INFORMATION: See warranty and safety note below. 9 GT 11191—Wt. 4 lbs. 10 oz. \$29.50

(4) 3/8 HP Single-speed Drill
MOTOR, BEARINGS, GEARS: Motor develops maximum 3/8-HP. Single no-load speed of 600 rpm. Permanently lubricated ball thrust, sleeve bearings. Double-reduction helical gears. Motor brushes externally accessible. Trigger switch locks for continuous operation. Reversing switch for backing out bits.
CHUCK: 1/2-in. capacity. Geared chuck threaded for 1/2-inch x 20 spindle.
HOUSING: Thermoset polyester motor housing; die-cast aluminum gear housing. Top assist handle for 2-hand control, removes easily. Four position "D" grip rear handle of high-impact polymer with textured grips.
ELECTRICAL INFORMATION: Double-insulated; needs no grounding. 110-120-volts, 60-Hertz, AC. 360 watts. UL listed. Six-foot, 2-wire cord.
ORDERING INFO: See warranty below. 9 GT 1029—Wt. 6 lbs. 5 oz. . . \$49.50

(5) 7/8-HP Single-speed Drill
MOTOR, BEARINGS, GEARS: Motor develops maximum 7/8 HP. Single speed . . . no load speed of 575 rpm. Permanently lubricated 100% ball, roller bearings. Double-reduction helical gears for smooth, quiet power transmission. Trigger switch locks for continuous operation . . . releases quickly. Toggle-type reversing switch, just flip to back out stuck bits.
CHUCK: 1/2-inch capacity. Geared chuck threaded for 1/2-inch x 20 spindle. With pin-type spindle lock.
HOUSING: Sectional die-cast aluminum with non-glare finish. Removable top handle for 2-hand control. 4-position "D" grip rear handle of high-impact polymer with textured grips.
ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120 volts, 60 Hz., AC. 600 watts. UL listed. 6-foot, 2-wire neoprene cord.
ORDERING INFORMATION: See warranty, safety note below. Wt. 9 lbs. 5 oz. 9 GT 1149 \$69.50

3/4 HP Drill. Like 3/8 HP drill above, except with permanently lubricated ball and sleeve bearings. Motor develops 3/4 HP. 576 watts.
ORDERING INFO: See warranty, safety note below. Wt. 9 lbs. 3 oz. 9 GT 1139 \$59.50

FULL 1-YEAR WARRANTY ON CRAFTSMAN® PORTABLE ELECTRIC TOOLS
If this CRAFTSMAN Portable Electric Tool fails to give complete satisfaction within 1 year from date of purchase, return it to nearest Sears store throughout U.S. Sears will replace it, free of charge. If this CRAFTSMAN Portable Electric Tool is used for commercial or rental purposes, this warranty applies for only 90 days from date of purchase. This warranty gives you specific legal rights, you may also have other rights that vary from state to state.
SAFETY NOTE: Protect your eyes—wear safety goggles when using drills sold on these 2 pages . . . see page 57.

CRAFTSMAN® Cordless Drills

THE RIGHT DRILLS for tasks away from an electrical power supply



Drills up to 80 holes thru
a pine 2x4 on one charge

MOTOR, BEARINGS, GEARS: No-load speed of 300 rpm (maximum on full charge). Permanently lubricated ball thrust, sleeve bearings. Spur gearing. Reversing switch.
CHUCK: 1/2-in. cap. Geared chuck threaded for 1/2-in. x 24 spindle.
HOUSING: Thermoset polyester.
ELECTRICAL INFO: Recharger runs on 110-120-volt, 60-Hz., AC. UL listed. Six-foot, 2-wire cord.
ORDERING INFORMATION: See warranty, safety note above. 9 GT 1111—Wt. 3 lbs. 10 oz. . . \$29.50



MOTOR, BEARINGS, GEARS: Power-pak pulls out from back of drill for recharging. Extra power-pak sold separately below. No-load speed of 300 rpm (max. on full charge). Sleeve bearings are permanently lubed. Spur gearing. Reversible.
CHUCK: 3/8-in. cap. Geared chuck threaded for 3/8-in. x24 spindle.
HOUSING: Made of thermoset polyester.
ELECTRICAL INFORMATION: Recharger runs on 110-120 volts, 60 Hz., AC. UL listed. 6-foot, 2-wire cord.
ORDERING INFORMATION: See warranty and safety note above. 9 GT 1056—Shipping weight 5 pounds 2 ounces \$49.50
(8) Extra Power-Pak for Cordless 3/8-inch Drill above
9 GT 11113—Shipping weight 1 pound \$19.50



**(7) Cordless
3/8-inch
Reversible
Drill**
\$49.50

Drills up to 120
holes thru a pine
2x4 on 1 charge

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

Portable Electric Tool Shop



CRAFTSMAN® Belt Sanders

Tackle any large surface with ease
... sand wood, plastic, even metal

*Sears * Best*



(1) Heavy-duty 1 1/2-HP Belt Sander with dust pick-up

Sands twice as fast as sander (3) at right

4x6-in. sanding surface, no-load speed of 1300 feet per minute

\$99⁵⁰



(3) 1-HP Belt Sander with dust pick-up

3x4.7-in. sanding surface, no-load speed of 1300 feet per minute

\$74⁵⁰



No dust pick-up
\$59⁵⁰

MOTOR, BEARINGS, GEARS: Develops maximum 1 1/2-HP motor with no-load speed of 1300 feet per minute. Externally accessible motor brushes. Trigger switch. 100% ball and roller bearings. Combination spur gear and timing belt drive.

HOUSING: High-impact polymer gear housing. Thermoset polyester motor housing. Auxiliary grip provides firm, two-hand control. Aluminum belt cover with non-glare satin finish. Base has steel wear strip for smooth, rigid sanding surface.

SANDING SURFACE: 24 square inches. Sands flush to vertical surfaces. Includes one medium-grit sanding belt.

ELECTRICAL INFO: Double insulated. 110-120-volt, 60-Hertz AC. 900 watts. UL listed. 6-foot, 2-wire neoprene cord with 3-inch bend relief.


ORDERING INFORMATION: See Warranty, page 63; Safety Note, below right.
9 GT 1178C—Shipping weight 18 lbs. \$99.50

(2) Sander above without dust pick-up
ORDERING INFORMATION: See Warranty, page 63; Safety Note, below right.
9 GT 1176C—Shipping weight 16 lbs. \$84.50

Only at Sears . . . Belt Sander Finishing Stand

With die-cast aluminum top, built-in dust collector and on-off switch

\$34⁹⁹

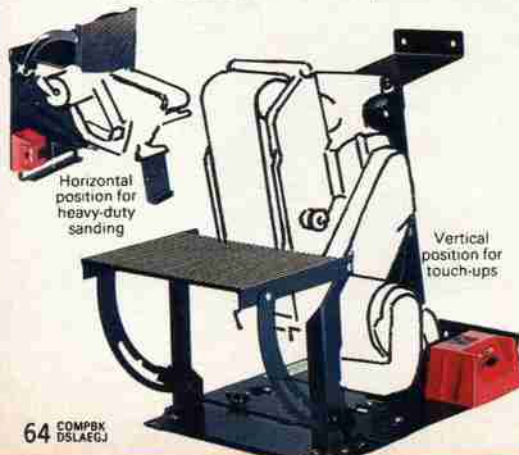

Converts your belt sander to a sturdy finishing stand. Allows you to bring work to the tool . . . heavy-duty sanding jobs can be done with ease. Sander clamps to stand, converts quickly to horizontal or vertical position. Fits all Sears 3 and 4-inch belt sanders.

CONSTRUCTION: Die-cast aluminum top provides sturdy work surface. Ridges on table collect sawdust to avoid caking, workpiece remains level. Carbon steel frame with black finish. Sawdust collector attaches to your shop vac for efficient dust pick up . . . helps reduce clean-up time. On/off switch lets you control power from side of stand. Switch has 6-foot, 3-wire cord. Stand measures 13x11x13 inches. Includes screws for mounting to wall, table or workbench.

ORDERING INFORMATION:
9 GT 25964—Shpg. wt. 7 lbs. 15 oz. \$34.99

Finishing stand without switch (not shown).
Stand as described above, except without on/off switch.
9 GT 25962—Shpg. wt. 7 lbs. 14 oz. \$29.99



CRAFTSMAN® 2-speed, 3/4-HP Sander-Polisher Outfit

\$54⁵⁰

MOTOR, BEARINGS, GEARS: Develops maximum 3/4-HP with no-load speeds of 4200 rpm for sanding, 3500 rpm for polishing. Externally accessible motor brushes. Locking trigger switch with quick-release. Ball and needle bearings. Helical gears.

HOUSING: Satin-finish aluminum gear housing. Thermoset polyester motor housing. High-impact polymer handles. Built-in front assist handle. With 1/2-inch spindle.

ACCESSORIES: Three 6-inch sanding discs (fine, medium, coarse), 6-in. rubber back-up pad, 6-in. lamb's wool polishing bonnet.

ELECTRICAL INFORMATION: Double insulated. 110-120-volt, 60-Hertz AC. 660 watts. UL listed. 6-foot, 2-wire cord with 3-inch bend relief.

ORDERING INFORMATION: See Warranty on page 63 and Safety Note below.
Shipping weight 6 pounds 7 ounces.

9 GT 1152 . . . \$54.50

6-inch Aluminum-oxide Sanding Discs

GRITS, ORDERING INFORMATION:
Package of 6 sanding discs.

9 GT 25293—Fine. Wt. 5 oz. . . . Pkg. \$1.19

9 GT 25294—Medium. Wt. 7 oz. Pkg. 1.19

9 GT 25295—Coarse. Wt. 6 oz. . . . Pkg. 1.19

6-inch Lamb's Wool Polishing Bonnet

ORDERING INFORMATION:
Shipping weight 4 ounces.

9 GT 2527 . . . \$1.99



CRAFTSMAN® 1/16-HP Orbital Sander
\$14⁶⁶

MOTOR, BEARINGS, GEARS: Develops max. 1/16-HP with no-load speed of 9200 orbits per min. Slide switch. Sleeve bearings.

HOUSING: Thermoset polyester. Built-in front assist handle for two-hand control.

SANDING PAD: Uses 1/2 sheet, 3 3/8x7 inches. Sanding clamp with quick-change lever. Includes 3 sanding sheets (fine, medium, coarse).

ELECTRICAL INFO: Double insulated. 110-120-volt, 60-Hertz AC. 156 watts. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See Warranty on page 63, Safety Note below.
9 GT 1062—Wt. 5 lbs. 10 oz. \$14.66

Dust Pick-up Attachment for orbital and pad sanders on these two pages (not shown). Lets you attach your shop vac to sander for efficient dust pick up.

9 GT 11635—Wt. 2 lbs. 1 oz. \$9.89

SAFETY NOTE: Wear safety goggles sold on page 57 when using sanders.

See our complete selection of sanding belts, discs and sheets sold on page 66

YOU CAN DO IT



... with our CRAFTSMAN Sander-Polisher. Relieves you of difficult, time-consuming hand sanding and polishing. Use it to prepare surfaces for finishing by removing wood, old paint and varnish. Excellent for high-speed polishing of automobiles and boats. Attach the proper accessories (sold separately at right) and you can even grind metal or remove rust and scale. You'll be surprised at what you can do with your CRAFTSMAN Sander-Polisher. All you need is a little know-how and you can do it!

(1) **Our Finest CRAFTSMAN® Sander-Polisher**
2-speed, 1½-HP motor; sands with 9-in. disc; polishes with 7-in. bonnet

\$129⁵⁰



CRAFTSMAN 7-in. Sander

1-speed, 1-HP motor; sands with 7-in. disc

\$89⁵⁰

MOTOR, BEARINGS, GEARS: 1½-HP motor with no-load speeds of 4600 rpm for sanding, 3600 rpm for polishing. Externally accessible motor brushes. Locking trigger switch with quick release. 100% ball bearings. Efficient, low-friction spiral bevel gears.

HOUSING: Aluminum gear housing. Thermoset polyester motor housing. High-impact polymer handles. Removable aux. handle fits either side. ½-in. spindle, spindle-lock. Rubber bumper, hang-up bail.

ACCESSORIES: Includes three 9-inch sanding discs (fine, medium, coarse), 9-inch fiber back-up pad, 4½ and 7-inch rubber back-up pads, 7-inch lambs' wool polishing bonnet.

ELECTRICAL INFO: Double insulated, 110-120-v., 60-Hz. AC, 1080 watts. UL listed, 6-ft., 2-wire neoprene cord with 3-in. bend relief.

ORDER INFO: See warranty, p. 63; Note bottom of opposite page.
9 GT 1158—Shipping weight 14 pounds 4 ounces.....\$129.50

(2) **7-inch High-speed Sander.** Similar to sander-polisher (1), except with 1-HP motor. No-load speed of 4600 rpm. Includes 7-in. sanding discs and fiber pad, 3½-in. rubber pad, 960 watts.

ORDER INFO: See warranty on page 63, Safety Note on bottom of opposite page.
9 GT 1156—Wt. 13 lbs. 14 oz.\$89.50

7-inch Sander-Polisher (not shown). Similar to sander-polisher (1), except with 1½-HP motor. Includes 7-in. sanding discs and fiber back-up pad, 3½ and 7-in. rubber back-up pads, 1020 watts.
9 GT 1157—Wt. 13 lbs. 14 oz.\$109.50

(3) **Aluminum-oxide Sanding Discs.** Fiber backing.

DIAMETERS, GRITS, ORDER INFO: Package of 10.

Diam.	Grit	Catalog Number	Shipping weight	Price Pkg.	5 Pkgs. for
7-inch	80/Fine	9 GT 25299	1 lb. 4 oz.	\$5.49	\$24.99
	50/Medium	9 GT 25291	1 lb. 5 oz.	5.79	25.99
	36/Coarse	9 GT 25292	1 lb. 6 oz.	6.29	27.99
9-inch	80/Fine	9 GT 25287	2 lbs. 3 oz.	7.99	34.99
	50/Medium	9 GT 25288	2 lbs. 7 oz.	8.49	37.99
	36/Coarse	9 GT 25289	2 lbs. 11 oz.	8.99	39.99

(4) **Lambs' Wool Polishing Bonnet**

ORDERING INFO: For Sander-Polishers above.
9 GT 2528—Shipping weight 5 ounces.....\$2.49

(5) **Grinding Wheel.** Aluminum-oxide. For fine finish grinding. Fits ½-inch spindle.

SIZES, ORDER INFO: Use with safety guards at right.
9 GT 64101—For 7-in. sanders. Shpg. wt. 1 lb. 8 oz.\$4.99
9 GT 64102—For 9-in. sanders. Shpg. wt. 2 lbs. 4 oz.\$5.99

(6) **Safety Guard for 7-inch diameter Sanders.** High-impact polymer. Red.

ORDERING INFO: Use with grinding wheel 9 GT 64101 at left.
9 GT 1711—Wt. 1 lb. 8 oz.\$9.89

Safety Guard for 9-inch diameter Sanders (not shown). Heavy-gauge steel. Black.

ORDERING INFO: Use with grinding wheel 9 GT 64102 at left.
9 GT 1712—Wt. 2 lbs.\$12.89

(7) **5-inch Wire Cup Brush.** For paint, rust and scale removal. Steel. 0.02-ga. wire. Fits ½-in. spindle.

ORDERING INFO: For 7 and 9-inch diameter sanders above.
9 GT 64106—Wt. 2 lbs. 12 oz.\$7.99

CRAFTSMAN® Dual-action Pad Sanders



½-sheet Sander

½-HP, without dust pick-up **\$29⁵⁰**

(8 and 9) **½ and ¼-HP Pad Sanders**

MOTOR, BEARINGS, GEARS: Sand at no-load speed of 4000 orbits or strokes per minute. Slide switch changes action. Ball and sleeve bearings for smooth, dependable operation. Single-reduction spur gearing. Slide on-off power switch. **HOUSING:** Thermoset polyester. Built-in front assist handle for firm, two-hand control. Counterbalance design for reduced vibration.

SANDING PAD: Uses ½ sheet, 3½x7 inches. Sandpaper clamp with quick-change lever. Includes 3 sanding sheets (fine, medium, coarse).

ELECTRICAL INFORMATION: Double insulated, 110-120-volt, 60-Hertz AC, UL listed. With 6-foot, 2-wire cord.

(8) **½-HP Pad Sander without dust pick-up.** 240 watts.

ORDERING INFO: See warranty on page 63, Safety Note on bottom of opposite page.

Shipping weight 5 lbs. 4 oz.
9 GT 1163.....\$29.50

¼-HP Pad Sander (not shown). Like (8) above, except with non-glare aluminum housing, 300 watts.

Shipping weight 5 lbs. 8 oz.
9 GT 1164.....\$39.50


(9) **¼-HP Pad Sander with dust pick-up.** Accessible motor brushes. Enclosed housing for vacuum-action, 336 watts.

ORDER INFO: See warranty, p. 63; Note on bottom of opposite page.
9 GT 1165—Wt. 9 lbs. 4 oz.\$49.50

Lambs' Wool Polishing Bonnets (not shown). Order by pad size below.

For ½-sheet pad sanders.
9 GT 2530—Shipping weight 2 oz.\$1.09

For ¼-sheet pad sanders.
9 GT 2537—Shipping weight 3 oz.\$1.59



Change action with flip of a lever

Orbital action for rough sanding
Straight-line action for fine sanding

½-sheet Sander, ½-HP
With dust pick-up **\$79⁵⁰**

Without dust pick-up **\$59⁵⁰**



(10) **½-HP Pad Sander with dust pick-up.** More power, greater coverage... works up to 40% faster than pad sanders (7) and (8) at left.

MOTOR, BEARINGS, GEARS: ½-HP motor with no-load speed of 4000 orbits or strokes per minute. Externally accessible motor brushes. Locking trigger switch with quick-release, 100% ball bearings. Single-reduction helical gearing.

HOUSING: Non-glare aluminum gear housing. Thermoset polyester motor housing and handles. Built-in front assist handle. Enclosed housing for vacuum-action. Counterbalanced for reduced vibration, less operator fatigue.

SANDING PAD: Uses ½ sheet, 4½x9 inches. Sandpaper clamp with quick-release lever. Includes 3 sanding sheets (fine, medium, coarse).

ELECTRICAL INFO: Double insulated, 110-120-volt, 60-Hertz AC, 540 watts. UL listed, 6-foot, 2-wire neoprene cord with 3-inch bend relief.

ORDER INFO: See Warranty on page 63, Safety Note on bottom of opposite page.
9 GT 1168—Shipping weight 10 pounds 8 ounces.....\$79.50

¼-HP Sander without dust pick-up (not shown). 480 w.
9 GT 1166—Shipping weight 9 pounds 9 ounces.....\$59.50

Portable Electric Tool Shop



Sanding Discs for portable and bench sanders

GRIT, SIZE AND ORDERING INFORMATION:

Diam.	Hole	Grit	Grit Number	Pkg. of	Catalog Number	Wt. lbs. oz.	Price Pkg.	5 Pkgs.
Aluminum Oxide, paper-backed								
4-in.	1/4-in.	Asstd.*	40, 80, 120	6	9 GT 2544	4	69c	\$2.99
5-in.	None	X-Fine	220	6	9 GT 26051	3	89c	3.99
		Fine	120	6	9 GT 26052	3	89c	3.99
		M-Fine	80	6	9 GT 26053	3	89c	3.99
5-in.	1/4-in.	Coarse	36	3	9 GT 2542	4	79c	3.49
		Asstd.*	60, 120	6	9 GT 2543	4	89c	3.99
6-in.	1/4-in.	Fine	100	6	9 GT 25321	5	\$1.19	4.95
		Med.	60	6	9 GT 25322	6	1.19	4.95
		Coarse	40	4	9 GT 25323	6	1.19	4.95
		Asstd.*	40, 80, 120	6	9 GT 25325	6	1.19	4.95
7-in.	1/4-in.	Asstd.*	Asstd.	6	9 GT 2531	7	1.49	5.99
8-in.	None	Fine	120	6	9 GT 25251	7	1.49	5.99
		Med.	60	6	9 GT 25252	8	1.49	5.99
		Coarse	40	5	9 GT 25253	10	1.49	5.99
8-in.	3-in.	Asstd.*	120, 60, 40	6	9 GT 22732	8	1.79	6.99
9-in.	None	Fine	120	6	9 GT 25301	8	1.99	8.99
		Med.	60	6	9 GT 25302	10	1.99	8.99
		Coarse	40	5	9 GT 25303	12	1.99	8.99
10-in.	3-in.	Asstd.*	120, 60, 40	6	9 GT 22731	13	2.49	10.99
Fiber-backed Aluminum Oxide for longer wear than discs above.								
6-in.	3/8-in.	Med.	50	10	9 GT 25297	1	\$3.49	\$21.35
7-in.	3/8-in.	Fine	80	10	9 GT 25299	1	4.49	24.99
		Med.	50	10	9 GT 25291	1	5.79	25.99
		Coarse	36	10	9 GT 25292	1	6.29	27.99
9 1/2-in.	7/8-in.	Fine	80	10	9 GT 25287	2	3.79	34.99
		Med.	50	10	9 GT 25288	2	7.49	37.99
		Coarse	36	10	9 GT 25289	2	11.89	39.99
Aluminum Oxide, pressure-sensitive with adhesive back								
8-in.	None	Fine	120	6	9 GT 25381	10	\$4.49	\$19.99
		Medium	60	6	9 GT 25382	11	4.49	19.99
		Coarse	40	6	9 GT 25383	13	4.49	19.99
Tungsten Carbide, bonded to thin steel								
5-in.	1/4, 3/8	Medium	1	9 GT 30091	4	\$1.49	\$6.49	
		Coarse	1	9 GT 30092	4	1.49	6.49	
6-in.	inch	Medium	1	9 GT 30093	4	1.59	7.99	
		Coarse	1	9 GT 30094	4	1.59	7.99	
5-in.	1/4, 3/8	Extra Coarse	1	9 GT 30095	5	1.59	7.99	
6-in.	1/4, 3/8	Extra Coarse	1	9 GT 30099	7	1.79	7.99	

*2F, 2M, 2C *3F, 3M

Sanding Sheets for soft and hard woods, metal and water sanding ... for pad sanders or manual work

Quality sanding sheets with abrasives bonded to strong backings.


TYPE, GRIT, SIZE, ORDERING INFORMATION:

Sheet type	Size in.	Grit	Grit No.	Catalog Number	Pkg. of	Wt. lbs. oz.	Price
Aluminum Oxide, paper-backed.							
For hardwood.	9x11	X-Fine	150	9 GT 27421	100	4 12	\$14.99
	9x11	Fine	100	9 GT 27422	100	6 6	14.99
	9x11	Medium	60	9 GT 27423	100	9 14	14.99
	9x11	Coarse	40	9 GT 27424	50	7 10	7.49
Aluminum Oxide, cloth-backed.							
For metal.	9x11	Fine	120	9 GT 67821	50	3 15	17.99
	9x11	Medium	80	9 GT 67822	50	5 4	17.99
	9x11	Coarse	60	9 GT 67823	50	7 11	18.99
Garnet paper.							
For all woods.	9x11	X-Fine	150	9 GT 67941	100	4 12	11.99
	9x11	Fine	100	9 GT 67942	100	6 6	11.99
	9x11	Medium	60	9 GT 67943	100	9 15	11.99
	9x11	Coarse	40	9 GT 67944	50	7 10	8.99
Emery cloth.							
For metal.	9x11	Fine	120	9 GT 67925	50	3 10	14.99
	9x11	Medium	80	9 GT 67926	50	4 4	14.99
	9x11	Coarse	60	9 GT 67927	50	5 11	14.99
Flint Sandpaper.							
For soft woods only.	9x10	X-Fine	150	9 GT 67946	100	3 2	7.99
	9x10	Fine	100	9 GT 67947	100	3 14	7.99
	9x10	Medium	60	9 GT 67948	100	5 4	7.99
	9x10	Coarse	40	9 GT 67949	50	4 12	4.99
Silicon Carbide Water-sand Finishing Paper.							
	9x11	Super-Fine	400	9 GT 30121	100	3 12	16.99
	9x11	X-Fine	320	9 GT 30122	100	4 0	16.99
	9x11	Med. Fine	240	9 GT 30123	100	4 7	16.99
Non-loading Sandpaper.							
	9x11	X-Fine	220	9 GT 67991	100	3 8	16.99
	9x11	Fine	180	9 GT 67992	100	3 8	16.99
	9x11	Medium	80	9 GT 67993	120	4 2	16.99
	9x11	Coarse	50	9 GT 67994	80	3 12	9.99

Sears Abrasive Center

Offers an assortment of abrasives in the grits and sizes that will help you obtain the type of finish required for your work projects

Sears offers the abrasive grit and size for machine or hand sanding. Choose the abrasive grit that fills your needs... like Aluminum Oxide, which is best for wood and plastic sanding. When coated with zinc stearate, it is given a non-clogging quality that increases wear. Steel-backed Tungsten Carbide with an extremely tough tungsten carbide coating sands concrete, metal... even planes wood. Its extra-coarse grit is designed for paint removal. Non-woven steel mesh with abrasive cleans metal, tiles and floors.



Sanding Belts for portable and bench-type belt sanders

NEW at Sears... polyester-backed, deluxe Sanding Belts. Resist edge fraying. More durable than cloth-backed sanding belts. Retain their overall shape and joint strength under highly humid conditions.

GRIT, SIZE AND ORDERING INFORMATION:

Grit	Grit Number	Catalog Number	Wt. oz.	Price each	Price for 10
3x21 inches—Aluminum Oxide					
X-Fine	100	9 GT 23201	3	\$1.29	\$11.49
Fine	80	9 GT 23202	4	1.29	11.49
Medium	50	9 GT 23203	4	1.29	11.49
Coarse	36	9 GT 23204	5	1.29	11.49

Standard Cloth-backed Sanding Belts are long lasting and fast cutting. Aluminum oxide abrasive on all belts. Use these belts for portable and bench-type sanders on wood, metal or plastic surfaces.

GRIT, SIZE, ORDERING INFORMATION:

Grit	Grit Number	Catalog Number	Wt. oz.	Price each	Price for 10
3x21 inches					
X-Fine	100	9 GT 22304	3	99c	\$8.99
Fine	80	9 GT 22301	3	99c	8.99
Medium	50	9 GT 22302	4	99c	8.99
Coarse	36	9 GT 22303	5	99c	8.99
X-Coarse	16	9 GT 22305	5	99c	8.99

4x24 inches. Best for wood.					
X-Fine	100	9 GT 22332	4	\$1.39	\$12.99
Fine	80	9 GT 22333	4	1.39	12.99
Medium	50	9 GT 22334	5	1.39	12.99
Coarse	36	9 GT 22335	6	1.39	12.99
X-Coarse	16	9 GT 22336	6	1.39	12.99

4x24 inches. Best for metal.					
X-Fine	100	9 GT 22337	4	\$1.39	\$12.99
Medium	60	9 GT 22338	5	1.39	12.99
Coarse	40	9 GT 22339	5	1.39	12.99

4x36 inches					
Fine	100	9 GT 22151	5	\$1.59	\$12.99
Medium	60	9 GT 22152	5	1.59	12.99
Coarse	40	9 GT 22153	6	1.59	12.99

6x48 inches					
Fine	100	9 GT 21671	8	\$2.79	\$24.99
Medium	60	9 GT 21672	9	2.79	24.99
Coarse	40	9 GT 21673	11	2.79	24.99



Sanding Sheets cut to size for pad sanders

Aluminum Oxide. Paper backing.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Pkg. of 12	10 Pkgs.
3 1/2 x 9	Fine	320	9 GT 25131	4	89c	\$7.99
3 1/2 x 9	Medium	180	9 GT 25132	4	89c	7.99
3 1/2 x 9	Coarse	80	9 GT 25133	5	89c	7.99
3 1/2 x 9	X-Coarse	50	9 GT 25134	8	99c	9.49
4 1/2 x 11	Fine	320	9 GT 27401	4	99c	8.49
4 1/2 x 11	Medium	180	9 GT 27402	5	99c	8.49
4 1/2 x 11	Coarse	80	9 GT 27403	6	99c	8.49
4 1/2 x 11	X-Coarse	50	9 GT 27404	9	1.09	9.49

Non-clogging. Fine grit, silicon carbide; medium, coarse grits, aluminum oxide. Paper backing.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Pkg. of 12	10 Pkgs.
3 1/2 x 9	Fine	180	9 GT 67645	5	\$1.39	\$11.99
3 1/2 x 9	Medium	80	9 GT 67646	6	1.39	11.99
3 1/2 x 9	Coarse	50	9 GT 67647	9	1.39	11.99
4 1/2 x 11	Fine	180	9 GT 67635	7	1.59	13.99
4 1/2 x 11	Medium	80	9 GT 67636	8	1.59	13.99
4 1/2 x 11	Coarse	50	9 GT 67637	11	1.59	13.99

Tungsten Carbide. Steel backing.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Price Each	Price for 10
3 1/2 x 9	Fine	...	9 GT 30284	4	\$1.49	\$12.99
3 1/2 x 9	Medium	...	9 GT 30285	4	1.49	12.99
3 1/2 x 9	Coarse	...	9 GT 30286	4	1.49	12.99
4 1/2 x 11	Fine	...	9 GT 30096	6	2.29	19.99
4 1/2 x 11	Medium	...	9 GT 30097	6	2.29	19.99
4 1/2 x 11	Coarse	...	9 GT 30098	6	2.29	19.99

Non-woven. Synthetic mesh with abrasive.

GRIT, SIZE, ORDERING INFORMATION:

Size in.	Grit	Grit No.	Catalog Number	Wt. oz.	Pkg. of 3	10 Pkgs.
3 1/2 x 9	Fine	...	9 GT 27441	3	99c	\$8.49
3 1/2 x 9	Medium	...	9 GT 27442	3	1.49	12.99
3 1/2 x 9	Coarse	...	9 GT 27443	4	1.99	17.49
4 1/2 x 11	Fine	...	9 GT 27431	3	1.49	12.99
4 1/2 x 11	Medium	...	9 GT 27432	4	1.99	17.49
4 1/2 x 11	Coarse	...	9 GT 27433	5	2.49	21.99



(1) NEW at Sears... Shop Sanding Rolls. Economical and convenient 1 1/2-in. wide, 50-yd. rolls. Great for quick sanding jobs at home, or in your work shop. Tear desired size from roll needed to complete sanding projects.

GRIT, SIZE, ORDERING INFO:

Grit	Grit No.	Catalog Number	Wt.		Price each
			lbs.	oz.	
Aluminum Oxide					
.....	80	9 GT 67824	3	7	\$9.99
.....	120	9 GT 67825	2	7	9.99
.....	180	9 GT 67826	2	1	9.99

(2) Block Hand Sander Kit
Molded yellow, rubber block for sanding wood or metal. Incl. six sanding sheets: 2 fine, 2 medium, 2 coarse.

ORDERING INFORMATION:

Hobby Tools

Help give a finished look to your craft projects!

More Hobby Tools
on next page

YOU CAN DO IT

... with Sears versatile Hobby Tools that fill your many hobby-craft needs. From polishing precious stones and metals and carving intricate designs in wood, to cutting scrollwork on small workpieces and cleaning out flat, recessed areas. You'll be amazed at what you can accomplish with your Hobby Tools. All it takes is a little know-how and you can do it!

(1) Hobby Lathe \$43⁹⁹

Turn wood, plastic and soft metals not containing iron. MOTOR, BEARINGS: Ball-bearing motor develops no-load speed of 3450 rpm.

CONSTRUCTION: High-impact plastic. Drive center shaft lock lets you remove and attach headstock easily. TURNING CAPACITY: 1½-in. diam. stock. Maximum length 6 in. between centers.

ACCESSORIES: Tail, headstock centers, tool support, spanner wrench. Lathe chisel set sold separately below.

ELECTRICAL INFO: 115 v., 100 w., 60 Hz., AC., UL listed. 6-ft., 3-wire cord.

ORDERING INFORMATION: Wear safety goggles, p. 57. Shipping weight 6 lbs. 10 oz. 9 GT 25141.....\$43.99

(2) Steel-tipped Chisel Set
COMPOSITION: 4 chisels, 30° angle, 60° angle, round-end tools, parting tool. ORDERING INFO: Wt. 8 oz. 9 GT 25145.....Set \$9.89

(3) New at Sears! CRAFTSMAN®

4-in. Motorized Table Saw

Ideal for small craft and hobby work \$83⁹⁹

CUTTING BLADE, CAPACITIES: 4-inch combination blade cuts up to 1 inch thick at 90°, ¾ inch thick at 45°. TABLE: Glass, reinforced plastic. 12x10 inches. 4-inch work area in front of blade. Tilts for bevel cuts. MOTOR: 9000-rpm. Lubricated-ball and sleeve bearings.

ELECTRICAL INFORMATION: Front-mounted switch, 115 volts, 60 Hz., AC. UL listed.

ORDERING INFO: See Warranty, page 39. See page 73 for blades. Shipping weight 12 pounds.

9 GT 2474.....\$83.99

POLISH

CARVE

SCROLL CUT

ROUT

12

Single-speed Rotary Hobby Grinder with flexible shaft

\$63⁹⁹

13

Variable-speed Rotary Grinder Kit lets you work with speed and accuracy

\$63⁹⁹

14

(14) All-purpose Hobby Center

\$68⁹⁹

Use as a bench and hand grinder and disc sander to sand, polish, carve.

MOTOR, BEARINGS: Bench grinder has variable speed, 1000 to 4500 rpm; hand grinder and disc sander have variable speed, 7000 to 25,000 rpm. Series universal motor.

HOUSING: High-impact plastic. Base unit, 5x6¼x9 inches high.

KIT INCLUDES: 9 emery wheels, 1 dressing stone, 2 ar-bors, 3 polishing wheels, 2 rotary files, 4 cutting wheels, 1 drum sander attachment, 3 sanding drums, 10 sanding discs, 2 bristle brushes, 1½-in. collet, 1½-in. drill bit, 2 double-ended wrenches, allen wrench. Parts tray and tool rest.

ELECTRICAL INFORMATION: 120 v., 300 w., 60 Hz., AC., UL listed. 6-ft., 2-wire cord.

ORDERING INFORMATION: Wear safety goggles, pg. 57. Shipping weight 8 lbs.

9 GT 25156.....\$68.99

(12) CRAFTSMAN® Single-speed Rotary Hobby Grinder. Flexible shaft and swivel base. Shaft connects to slim-grip handpiece. . . . ideal for hard-to-reach spots. You can grind, polish, deburr, sand, carve, rout, cut and engrave. For wood, plastics, gems, leather, metals.

MOTOR: Develops no-load speed of 25,000 rpm.

CONSTR: High-impact plastic housing. Detachable, 360° swivel base. . . . mounts on bench or wall with hanger bracket included. Vinyl covered shaft, 34 inches long.

ACCESSORIES: Includes 1½-in. collet, instructions. Motor speed control and accessories sold on page 68.

ELECTRICAL INFORMATION: Operates on 115 volt, 95 watt, 60 Hz., AC., UL listed, 6-ft., 3-wire cord.

ORDERING INFORMATION: See Warranty, page 63. See safety goggles, page 57.

Shipping weight 4 lbs. 6 oz. 9 GT 25143.....\$63.99

(13) CRAFTSMAN® Variable-speed Rotary Hobby Grinder Kit. You can grind, polish, deburr, sand, carve, rout, cut and engrave. Work in wood, stone, plastics, leather and metals. Variable speed enables you to handle everything from rough shaping to intricate detail work.

MOTOR: Develops speed of 5000 thru 25,000 rpm.

CONSTRUCTION: High-impact plastic housing. Measures 16¼x13¾x10¾ inches.

KIT INCLUDES: 1 wrench, 3 cutoff wheels, 7 disc sanders, 1 felt wheel, 1 drill, 1 high-speed cutter, 2 mandrels, 3 bristle brushes, 1 drum sander, 3 coarse sander bands, 1 dressing stone, 1 felt polishing wheel, 1½ and ¾-in. collets, 7 mounted wheel points, storage box.

ELECTRICAL INFORMATION: Operates on 115 volt, 60 Hz., AC., UL listed, 3-wire cord.

ORDERING INFORMATION: See Warranty, page 63. Wear safety goggles, page 57.

9 GT 25158—Shipping weight 2 lbs. 9 oz. . . . Kit \$63.99

(15) Deluxe Tool Knife Cabinet

For wood, plastic, paper, soft metal hobby projects.

CONSTR: Blades and components of high-carbon steel. Case.

SET COMP: 4 routers, 4 gouges, 8 refill blades, razor saw blade, coping saw, block planer, tweezer, 2 knives (Nos. 1, 5), pliers, hammer set, hand drill, contoured sander set, file handle, 3 needle files, bench vise, 2 "C" clamps, 2 screwdrivers, pin vise, 2 drill bits, instructions.

ORDER INFO: Wt. 6 lbs. 8 oz. 9 GT 52689.....Set \$63.00

(16) Deluxe Knife, Tool Set

SET COMPOSITION: 2 aluminum handles, 1 grooved plastic handle, 13 assorted blades, 4 gouges, 2 routers, block planer, sander, spoke shave, balsa stripper and case.

ORDERING INFORMATION: Shipping weight 2 pounds 3 ounces.

9 GT 52686.....\$19.79

CRAFTSMAN Scroll Saw-Sander
Multi-purpose tool

\$63⁹⁹

4

Scroll Saw-Sander
Accessory
Kit

\$22⁴⁹

(4) CRAFTSMAN® Scroll Saw-Sander. For scrollwork on small work pieces or medium-size projects.

MOTOR AND BEARINGS: Ball-bearing motor runs at 3450 strokes per minute, transfers power to blade without V-belt.

TABLE: Steel, 8x9½ in., ½-inch grid. Tilts 45° for bevel cuts.

CONSTRUCTION: Steel body and throat. 15-inch throat depth.

ACCESS: 4-in. disc sander, four 3-in. pin-end blades, adj. blade guard.

ELEC INFO: 110-120 v., 80 w., 60-Hz., AC., UL listed, 5-ft., 3-wire cord.

ORDER INFO: See Warranty, pg. 39. Wear safety goggles, pg. 57.

9 GT 2472C—Shipping weight 17 pounds.....\$63.99

(5) Scroll Saw-Sander Accessory Kit

KIT INCL: Flexible 30-in. shaft, shaper attachment, 5 blades, 3 sanding discs, drum sander, 3 extra bands, 2 grinding wheels, drill bit, cutter, 2 bristle brushes, polishing compound, buffing wheel, 3 collets, wrench.

9 GT 2471—Shipping weight 2 pounds 2 ounces.....Kit \$22.49

(6 thru 11) CRAFTSMAN Alloy-steel Jig Saw Blades
Heat treated. 6-inch plain-end blades snap off to fit saws taking shorter plain-end blades. Use only designated blades for metal cutting, lubricate blade with beeswax. Sabre-saw blades can be used on jig saws for heavy work. Package of five.

ITEMS, USES, SIZES AND ORDERING INFORMATION:

Item	Catalog Number	Length in.	Width in.	Thick in.	Teeth per in.	Use for	Wt. oz.	Per pkg.
Pin-type blades								
(6)	9 GT 26877	3	.065	.010	25	Wood or metal	2	89c
	9 GT 26878	3	.187	.015	15	Wood, fast cut	2	99c
	9 GT 26879	4	.065	.010	18	Wood, plywood	2	69c
(7)	9 GT 26873	5	.110	.020	15	Wood or metal	3	79c
	9 GT 26881	6	.110	.020	15	Wood or metal	2	99c
Plain-end Blades (for most jig saws)								
(8)	9 GT 26885	6	.110	.020	10	Wood, rough metal	3	99c
	9 GT 26874	5	.110	.020	15	Wood or metal	3	89c
	9 GT 26883	6	.110	.020	15	Wood, fine metal	3	99c
(9)	9 GT 26884	6	.110	.020	20	Thin sheet metals, including steel	3	99c
For use with former 9-2072N as sabre saw								
(10)	9 GT 26888	6	.250	.028	20	Wood and metal	3	\$1.29
(11)	9 GT 26887	6	.187	.028	10	Wood, soft metal	3	1.29



COMPAK LAEGJO Sears 67

Portable Electric Tool Shop



**Hobby Tool
Kits and
Accessories
help bring a
finished look
to your
craft projects**



(1) CRAFTSMAN® 14-pc. Rotary Hobby Tool Kit \$28.99

Sand, polish, carve, shape. Motor develops no-load speed of 30,000 rpm.

HOUSING: Strong, lightweight plastic. Compact size.

KIT INCLUDES: 3 cutting wheels, 1 chuck wrench, 3 sanding discs, 1 polishing wheel, 1 emery wheel point, 2 mandrels, 1 silicon-carbide grinding wheel and 1 high-speed drill bit with 1/8-inch shank. Uses accessories with 1/8-in. shanks.

ELECTRICAL INFO: Includes 6-ft., 3-wire cord. 115-volt, 60-watt, 60-Hertz, AC., UL listed.

ORD. INFO: See Craftsman® Full 1-Year Warranty on page 63... wear safety goggles, see pg. 57. Shpg. wt. 1 lb. 9 oz. 9 GT 25171... Kit \$28.99

(2) Li'l Crafty® 29-pc. Rotary Hobby Tool Kit \$38.99

Grind, polish, slot, deburr, carve, sharpen, rout, cut and engrave. Motor develops no-load speed of 30,000 rpm.

HOUSING: Strong, lightweight plastic. 8 in. long. Hanging hook.

KIT INCLUDES: 2 mandrels, 2 steel cutting burrs, 5 abrasive points, drum sander, dressing stone, 4 sander bands, pumice wheel, simulated ruby crystal wheel, 5 separating discs, wire brush, felt buff wheel, rubber abrasive wheel, muslin buff, collet. Case. Uses access. with 1/8 or 3/32-in. shafts.

ELEC. INFO: 110-120 v., 88 w., 60 Hz., AC., UL listed. 6-ft., 3-wire cord.

ORDER INFO: Warranty, pg. 63. Wear safety goggles, pg. 57. Shipping weight 2 lbs. 6 oz. 9 GT 25175... Kit \$38.99

(3) Motor Speed Control for Kits (1) and (2) above and (12) on page 67

ELECTRICAL INFORMATION: 120 v., 60 Hz., AC., UL listed. 6-ft., 3-wire cord.

ORDERING INFORMATION: 9 GT 25144—Shpg. wt. 2 lbs. 1 oz. \$19.99

(4 thru 26) Accessories for Li'l Crafty and Rotary Hobby Tool Kits

SIZES AND ORDERING INFORMATION:

Key	Catalog Number	Description	Size (inch)	Wt. (oz)	Price
(4)	9 GT 25104	Cup Bristle Brush	1/2 shank	2	ea. .89c
(5)	9 GT 25105	Mandrel	3/32 shank	2	ea. .89c
(6)	9 GT 25106	Mandrel	1/8 shank	2	ea. .89c
(7)	9 GT 25119	Circular Burr	3/32 shank	2	ea. \$1.99
(8)	9 GT 25113	Bud Burr	3/32 shank	2	ea. 1.99
(9)	9 GT 25114	Cylinder Burr	3/32 shank	2	ea. 1.99
(10)	9 GT 25167	Abrasive Cone	1/8 shank	5	ea. .89c
(11)	9 GT 25166	Abrasive Ball	3/8 shank	6	ea. .89c
(12)	9 GT 25122	Abrasive Disc	1/8 shank	2	ea. .89c
(13)	9 GT 25123	Abrasive Disc	1/8 shank	2	ea. .89c
(14)	9 GT 25124	Abrasive Cyl.	1/8 shank	2	ea. .89c
(15)	9 GT 25125	Dressing Stone	3/8x1/2	2	ea. .89c
(16)	9 GT 25121	Abrasive Cone	1/8 shank	2	ea. .89c
(17)	9 GT 25159	Drum Sander	3/32 shank	6	ea. \$1.69
(18)	9 GT 25164	Bands for (17)	1/4 diam.	5	pkg. .89c
(19)	9 GT 25111	Felt Buff	3/8 diam.	2	pkg. .89c
(20)	9 GT 25109	Circular Saw	3/4 diam.	2	ea. \$1.69
(21)	9 GT 25117	Wheel Pumice	1/8 diam.	2	pkg. .89c
(22)	9 GT 25116	Abrasive Wheel	1 diam.	2	ea. \$1.29
(23)	9 GT 25107	Rubber Wheel	7/8 diam.	2	ea. .89c
(24)	9 GT 25108	Separating Discs	1/4 diam.	2	pkg. .89c
(25)	9 GT 25103	Wheel Brush	3/32 shank	2	ea. \$1.29
(26)	9 GT 25102	Rag Buff Wheel	1 diam.	2	ea. .89c

▲Pkg. of 2 ■Pkg. of 3 ♦Pkg. of 10 (5 med.; 5 coarse)

CRAFTSMAN® Single-Speed Rotary Grinder and Accessory Kit

Grinder alone
\$69.50



Grinder and Kit
\$79.50

Single-speed Rotary Grinder

MOTOR BEARINGS: Motor develops maximum 1/4-HP. Single speed of 26,500 rpm (no-load speed). Permanently lubricated ball bearings for long lasting service. Spindle lock.

CHUCK: Two collet-type chuck firmly grips 1/8 and 1/4-inch diameter shanks.

HOUSING: Lightweight aluminum, thermo-set polyester housing. Unit is contoured to fit easily in your hand. Heat-resistant polyester helps tool stay at cool working temperatures. 10 inches long.

ELEC. INFO: Dble.-insulated. No grounding. 110-120 v., 60 Hz., AC., 300 w., UL listed.

ORDERING INFORMATION: Warranty on pg. 63. Wear safety goggles, pg. 57. 9 GT 17444—Shpg. wt. 5 lbs. \$69.50

19-pc. Single-speed Rotary Grinder Kit

Grinder above plus 9 grinding points, 3 rotary rasps, 3 rotary files, wrench, collet (not shown). Permanex® polyethylene case, 12 1/2x9x4 1/2 inches high.

ORDER INFO: Shpg. wt. 6 lbs. 5 oz. 9 GT 17442... Kit \$79.50

Cutters and Points for Rotary Grinders

(27 thru 32) Individual CRAFTSMAN Rotary Cutters. High-speed steel. Type M-2. For wood, plastic and metal (except hardened steel). 1/4-inch shanks. Meets Federal Specifications GGG-F-00340 for hardness and accuracy. ORDER INFO: Each 3 oz.

Key	Catalog Number	Diam.	Shape	Price Each
(27)	9 GT 2966	1/4 in.	Cylindrical	\$2.59
(28)	9 GT 2967	1/4 in.	Spherical	2.59
(29)	9 GT 2970	3/8 in.	Tree pointed	3.59
(30)	9 GT 2968	3/8 in.	Elliptical	3.59
(31)	9 GT 2971	1/4 in.	Conical	2.59
(32)	9 GT 2969	1/4 in.	Tree Radius	2.59

CRAFTSMAN 6-pc. Rotary Cutter Set. 1 each of items (27 thru 32).

ORDERING INFORMATION: Save \$3.05. Separate prices total \$17.54. Shipping weight 6 ounces. 9 GT 2965... Set \$14.49

(33 thru 35) Rotary Cutters. Steel. Use on wood or plastic. With 1/4-inch shanks. Choose rasp or file.

ORDERING INFO: Imported. Shipping weight each 5 oz.

Key	Catalog Number	Description	Price Each
(33)	9 GT 64771	Rasp	\$1.39
(34)	9 GT 64781	File	1.29
(35)	9 GT 64773	Rasp	1.39
	9 GT 64783	File	1.29
	9 GT 64772	Rasp	1.39
	9 GT 64782	File	1.29

6-piece Rotary Cutter Set. Includes. (33 thru 35) above, plus plastic storage case.

ORDERING INFORMATION: Save \$1.05. Separate prices total \$8.04. 9 GT 64775—Wt. 10 oz. Set \$6.99

(36 thru 41) CRAFTSMAN Solid-Carbide Burrs. Harder than plain steel. 1/8-in. shanks. ORDER INFO: Wt. ea. 2 oz.

Key	Catalog No.	Shape
(36)	9 GT 25642	Tree shape
(37)	9 GT 25641	Cylindrical
(38)	9 GT 25643	Conical
(39)	9 GT 25646	Tree Shape
(40)	9 GT 25645	Ball shape
(41)	9 GT 25644	Cylindrical radius

6-pc. Burr Set. Includes (36 thru 41) shown above.

ORDER INFO: Save \$3.25. Sep. prices total \$22.74. Wt. 4 oz. 9 GT 2561... Set \$19.49

Set of 9 assorted mounted Grinding Points. Vitrified aluminum oxide heads. Sizes to 1-in. diam., 1/2 to 1 1/4 in. long. Also 1-in. diam. spherical points. 1/4-in. shank.

ORDER INFO: Wt. 14 oz. 9 GT 6471... Set \$4.99

(42 thru 46) Individual Mounted Grinding Points. Vitrified aluminum oxide heads mounted on 1x1/4-in. steel shafts. For fine, die cutting.

Key	Catalog No.	Diam.	Length	Wt.
(42)	9 GT 64714	1/2 in.	1 1/2 in.	3 oz.
(43)	9 GT 64719	1 in.	1 1/2 in.	4 oz.
(44)	9 GT 64717	1 in.	1 1/2 in.	4 oz.
(45)	9 GT 64716	3/4 in.	1 1/2 in.	3 oz.
(46)	9 GT 64713	3/4 in.	1 in.	3 oz.

(47) Stand and Holder. For Rotary Grinder. 4 1/2x2x5-in.

ORDER INFO: Wt. 4 lbs. 8 oz. 9 GT 25846... \$24.50

CRAFTSMAN® Electric Engraver

Protect possessions. Engrave them with your name, address, social security number, etc. Contact local law enforcement authorities for their recommended method.

HOUSING, TIP: Lexan® plastic. Tungsten-carbide tip for marking glass, plastic, brass and most metals.

MOTOR, SWITCH: .15 amp motor delivers 7200 strokes per minute. Slide-action, on-off switch.

ELEC. INFO: 110-120 v., 20 w., 60 Hz., AC., UL listed.

ORDERING INFORMATION: See Warranty on page 63. 9 GT 4297—Shipping weight 1 lb. 1 oz. \$13.99

9 GT 52839—Tungsten-carbide Tip. Wt. 3 oz. 2.49

Sears Electric Engraver (not shown).

HOUSING, TIP: Lexan® plastic. Hardened-steel tip for marking wood, plastic and soft metals.

MOTOR, SWITCH: .080 amp motor delivers 7200 strokes per minute. No on-off switch.

ELEC. INFO: 110-120 v., 20 w., 60 Hz., AC., UL listed. ORDERING INFORMATION: 9 GT 4290—Shipping weight 13 ounces \$7.99

9 GT 52835—Hardened-steel Tip. Wt. 2 oz. 1.59

CRAFTSMAN®
Electric
Engraver
\$13.99



See additional Hobby Tools on page 67.

There are four easy ways to order from this Catalog

1 2

Shop By Phone—You'll be pleased at the ease and convenience of ordering from Sears Catalog by telephone. So call today—it's the easiest way to shop. Phone your Sears Credit Account orders, too.

Have your order delivered directly to your home or pick it up at your nearest Sears Catalog Selling Unit.

Shop at Home by Mail—No matter where you live, Sears is always prepared to offer prompt and efficient service. Just list all the items on a Sears order blank or any plain piece of paper. Print plainly your full name and mailing address. Be sure to include all catalog numbers, descriptions of wanted items and any special information requested.

3 4

Catalog Sales Office or Sears Authorized Catalog Sales Merchant—It's so easy to order through your nearest Sears Catalog Selling Unit. A copy of all current Sears catalogs are available in each office for your reference. In addition, a complete supply of FREE Specialized Catalogs are also available for the asking.

Retail Store Catalog Sales Department—Friendly sales people are always willing to help you when you shop in person or by phone. Each Sears Retail Store has a Catalog Sales Department where trained sales people will help you make a selection and write your order.

CREDIT TERMS—See Sears Big Book or any Sears Retail Store or Catalog Selling Unit for information on Sears Credit Plans

HELPFUL INFORMATION ABOUT YOUR SEARS CATALOG ORDER

REGARDING OUR CATALOG PRICES

Following the policy in effect since our founding in 1886, prices quoted in Sears catalogs do not include (unless stated otherwise) charges for handling and shipping of goods from our Merchandise Distribution Center to a Sears catalog selling unit for pick-up, or for delivery to your home. The shipping and handling charges may differ depending on method of shipping. Information on shipping and handling charges for shipping by USPS/UPS or non-Sears truck can be obtained from the yellow customer information pages of our Big Book. Specific details on charges for handling and shipping to a Sears catalog selling unit for pick-up can be obtained from the unit, either at the counter or over the phone.

Prices in this catalog apply only to orders placed by mail, telephone, telegraph or placed in person at a Sears Catalog Sales Office, Authorized Catalog Sales Merchant or at a Catalog Sales Department in a Retail Store, Retail Catalog and Appliance Store or in a Sears Affiliated Store. Comparative pricing statements made in this catalog refer only to prices on merchandise offered nationwide through our own catalogs. Catalog merchandise prices and assortments may vary from those in our Retail Stores.

C.O.D. ORDERS

C.O.D. orders are accepted only for merchandise sent from a Catalog Merchandise Distribution Center to a Sears Unit. You may then pick up your order or arrange with your Sears unit for redelivery to your home (if available).

If you request that your order be sent directly to you via USPS/UPS or non-Sears truck, you must include a money order, check or use your Sears Credit Account.

Nor do we ship C.O.D. orders for merchandise cut, engraved, printed or made to order, for merchandise shipped direct from factory or shipped to foreign countries or to anyone other than the person sending the order.

COPIES OF WARRANTY STATEMENTS

The warranty is included with any product covered by a specific written warranty. If you wish a free copy before you order, write to:

Customer Relations Department
Sears, Roebuck and Co.
Sears Tower BSC 41-3
Chicago, IL 60684

IMPORTANT TAX NOTICE

We are required by law to collect tax on sales at rate shown

*Alabama.....4%	Kentucky.....5%	*Ohio.....4%
*Arizona.....4%	*Louisiana.....3%	Oklahoma.....4%
Arkansas.....3%	Maine.....5%	*Pennsylvania.....6%
California.....6%	Maryland.....5%	*Rhode Island.....6%
If your Rapid-Transit District has a tax, 6½%	*Massachusetts.....5%	*South Carolina.....4%
Colorado.....3%	*Michigan.....4%	*South Dakota.....4%
*Connecticut.....7%	*Minnesota.....4%	*Tennessee.....4½%
Distr. of Columbia.....5%	*Mississippi.....5%	Texas (4% State, 1% City).....5%
Florida.....4%	Missouri.....3½%	*Utah.....4¼%
*Georgia.....3%	Except Kansas City customers.....4½%	Vermont.....3%
Hawaii.....4%	*Nebraska.....3%	Virginia.....4%
Idaho.....3%	Nevada.....3%	Washington.....5.4%
Illinois (4% State, 1% City).....5%	*New Jersey.....5%	West Virginia.....3%
Indiana.....4%	New Mexico.....4%	Wisconsin.....4%
Iowa.....3%	*New York.....4%	Wyoming.....3%
Kansas.....3%	*North Carolina.....3%	
	North Dakota.....3%	

*If your city, county or parish has a tax, include the additional tax required
▲Omit tax on exempt clothing

SHIPPING INFORMATION

"N", "N2", "NH" suffix (such as 9-1234N) means that this item, if shipped directly to your home, is sent by motor carrier. (See non-Sears truck information pages in our Big Book.) If you prefer, pickup your order at a Sears Catalog Selling Unit... ask about pickup charges. Home delivery through a Sears unit may also be available, please inquire.

Parts of your order may be shipped from points other than your distribution center and may therefore arrive separately at different times.

USPS/UPS SHIPPING INFORMATION

Items which meet the qualifications described below can be shipped by **United States Postal Service (USPS)** or **United Parcel Service (UPS)**. For items which qualify for both USPS and UPS shipping, Sears will determine which method to use. Shipping and Handling charges for parcel shipment by either method are set forth in the table below. Catalog numbers ending with "N" are always sent by non-Sears truck.

For Parcels shipped by the USPS, the parcel maximum weight is 70 pounds. Parcel maximum size is 100 inches, length and girth combined. Parcels meeting these requirements can be sent by USPS in all zones except items with catalog numbers followed by "L" or "N".

"L" items (as 6-64800L) cannot be shipped by USPS from a first class post office to a first class post office for city delivery in any parcel shipping zone. (This does not apply to rural route addresses.)

Your Catalog Merchandise Distribution Center is served by a first class post office. Your postmaster or carrier can tell you if you are served by a first class office. "L" items weighing less than 15 lbs. and measuring over 84 in. but not exceeding 100 in. in length and girth combined are chargeable with a minimum rate equal to that for a 15 lb. item for the zone to which addressed.

For Parcels shipped by UPS, the parcel maximum weight is 50 pounds. Parcel maximum size is 108 inches, length and girth combined. This method is not available for shipments to P.O. Box and RFD addresses, nor is it available on shipments within certain states.

Determine your charge as follows: (1) add the weights of the items that do not have a "C" or "L" suffix and find the charge for the total weight in the chart below using the column that shows your Zone at the top. (2) Figure separate charge for weight of each individual item ending with a "C" or "L" as each of these items must be shipped separately. If you order more than one of the same item, figure the charge for each one separately.

SEARS SHIPPING AND HANDLING CHARGES FOR ORDERS SHIPPED BY USPS/UPS

SHIPPING WEIGHT	APPROXIMATE DISTANCE FROM CATALOG MERCHANDISE DISTRIBUTION CENTER							
	Local Zone	Zones 1 and 2 Not over 150 miles	Zone 3 151 to 300 Miles	Zone 4 301 to 601 Miles	Zone 5 601 to 1001 Miles	Zone 6 1001 to 1401 Miles	Zone 7 1401 to 1800 Miles	Zone 8 Over 1800 Miles
1 oz. to 8 oz.	\$.69	\$.73	\$.73	\$.75	\$.80	\$.83	\$.87	\$.91
9 oz. to 15 oz.	1.08	1.08	1.10	1.13	1.16	1.21	1.25	1.31
1 lb. to 2 lbs.	1.40	1.40	1.43	1.48	1.54	1.56	1.63	1.71
2 lbs. 1 oz. to 3 lbs.	1.48	1.48	1.54	1.63	1.72	1.86	2.00	2.17
3 lbs. 1 oz. to 5 lbs.	1.59	1.59	1.67	1.80	1.93	2.16	2.38	2.63
5 lbs. 1 oz. to 10 lbs.	1.60	1.82	1.95	2.18	2.48	2.87	3.24	3.69
10 lbs. 1 oz. to 15 lbs.	1.61	2.12	2.34	2.68	3.20	3.88	4.49	5.22
15 lbs. 1 oz. to 25 lbs.	2.12	2.70	3.04	3.55	4.29	5.41	6.53	8.01
25 lbs. 1 oz. to 40 lbs.	2.42	3.50	4.05	4.90	6.88	8.42	9.97	11.81
40 lbs. 1 oz. to 55 lbs.	2.70	4.35	4.92	5.86	7.05	8.88	10.76	14.88
55 lbs. 1 oz. to 70 lbs.	2.72	4.39	5.02	6.03	7.41	9.33	11.38	15.86

SEARS CATALOG MERCHANDISE DISTRIBUTION CENTERS

ATLANTA, GA 30395	DALLAS, TX 75295	LOS ANGELES, CA 90051
BOSTON, MA 02215	GREENSBORO, NC 27480	MEMPHIS, TN 38140
CHICAGO, IL 60607	JACKSONVILLE, FL 32297	MINNEAPOLIS, MN 55407
COLUMBUS, OH 43228	KANSAS CITY, MO 64127	PHILADELPHIA, PA 19132
	SEATTLE, WA 98184	

SEARS GUARANTEE

Satisfaction Guaranteed or Your Money Back

Whatever you buy at Sears, you have the right to use it for a reasonable time before you determine it is satisfactory and decide to keep it. If you decide it is not satisfactory, return it to us at our expense. We will do whatever is necessary to correct the cause of your dissatisfaction. If we can't satisfactorily provide a remedy, or if you request a refund, we will refund your full purchase price including appropriate delivery and finance charges and applicable taxes.

SEARS PLEDGE OF FAIRNESS

If, after you have decided to keep your purchase, it doesn't give you the service or performance you reasonably expect of it and there isn't a specific written warranty on the item that will satisfactorily correct the problem, please let us know. We want to make an adjustment that you will consider fair.

All rates on this page are subject to change without notice.

GENERAL INDEX

Abrasives	8, 9, 11, 28, 59, 86	Hack Saws	45	Sabre Saws	75
Adhesives	50	Hammers, Accessories	49, 53	Safety Equipment	36, 57
Air Compressors, Accessories	96-100	Hand Trucks	95	Sandblasters	99
Air Pumps	99, 106	Hatchets, Accessories	53	Sander-Polishers	59
Air Tools	98-105	Hearing Protectors	57	Sanders:	
Alarms, Fire	57	Heat Gun	88	Accessories	6, 59, 66
Analizers, Electrical	86	Heaters	120	Air Drive	102
Appliance Repair Kits	87	Hex Keys	120	Belt	11, 24, 26, 64
Aprons, Carpenters' and Handyman	56	Hobby Tools	36, 67, 68, 99	Disc	11, 24, 26, 64, 65
Arc Welders, Accessories	33, 34	Hoists	108	Flexible Flap	59
Augers, Drain	46	Hydraulic Jacks	107	Grinder	11
Auto Body Repair Kits	111	Hydraulic Power Sets	107	Pad	64, 65
Auto Testing Equipment	106	Hydraulic Press	107	Sawhorse Sets, Brackets	52
Auto Tools	110, 111, 116, 120-134			Sawhorses	52
Axes, Accessories	53	Impact Tools, Accessories	102-105	Saws, Accessories:	
Band Saws	8, 24, 25, 39	Jacks	107	Back	51
Bars	52	Jigsaws, Blades	67	Band	8, 25, 39, 40
Bits:		Jointer-Planers, Accessories	15, 24, 25, 26	Chain	82, 93
Auger	54	Knives	48, 54	Circular	80, 76, 77
Cutter	14	Lanterns	89	Coping	52
Drill	13, 54, 58, 59	Lathes, Turning:		Crosscut	52
Mortising	13	Metal, Accessories	40-43	Hack	45
Router	79-81	Wood, Accessories	9, 24, 26, 42, 43	Hand, Electric	73-77
Screwdriver	59	Leg Sets	11, 32	Hand, Manual	51
Shaper	10	Levels:		Jig	67
Blades, Saw:		Building and Surveying	90, 91	Keyhole	52
Band	8, 39	Carpenters'	55	Miter	51
Circular	28, 29	Locks	135	Radial	20-22, 25
Coping	52	Lubricants	113	Reciprocating	73
Dado	27	Lubrication Equipment	107	Sabre	67, 74, 75
Electric Hand	28, 29	Machinists' Tools	84	Table	16-18, 25, 26
Hack	45	Magnets	45	Scrapers, Accessories	56
Jig	67	Magnifiers	85	Screwdrivers	114, 115
Radial	20, 22, 28, 29	Mandrels	59	Scribers	84
Reciprocating	73	Mapp Gas Kits	47	Sewer Rods	46
Sabre	74	Masks	57	Shapers, Accessories	10
Table	27-29	Masonry Tools	56	Sharpeners	
Body, Fender Tools	108	Material Handling Equipment:		Drill bit	59
Bolt Cutters	113	Cranes	108	Saw	28
Books	22, 42, 56, 71	Flat Truck	95	Sharpening Stones	54
Braces, Accessories	54	Hand Truck	95	Sheet Metal Shears	74
Brake Tools	110	Hydraulic Lift	108	Shop Vacuums, Accessories	23
Bricklayers' Tools	56	Steel Conveyors	108	Snips	113
Buffing Wheels	59	Measuring Tape	55	Socket Wrench Sets	115, 123
Cabinets:		Mechanics' Tool Chests and Cabinets, Accessories	137-139	Sockets, Sets	120-124
Machinists'	6, 136	Mechanics' Tools	44-47, 49, 116-134	Soldering Guns, Irons, Accessories	89
Mechanics'	138, 139	Meters, Electrical	86	Splitting Wedge	53
Workshop	6, 7	Metric Tools:		Sprayers, Paint	98, 101
Calipers	84	Measuring Tapes, Meter Stick	55	Squares	48, 55
Carts	95, 137	Sockets	115, 120-123, 125	Stamping Sets	52
Carving Tools	87	Taps and Dies	44, 45	Stands, Tool	28, 32, 60
Cases, Carrying	60	Tool Sets	130-133	Staplers, Accessories	49
Casters	18, 32, 95	Torque Wrenches	134	Stools	6
Cement Tools	56	Wrenches	115, 120-123, 125	Storage Bins, Shelves, Drawers	6, 7, 108
Chain Saws and Accessories	92, 93	Micrometers	83	Strippers, Wire	87, 88
Chalk, Chalk Lines	56	Milling	43	Stud Driver, Accessories	52
Chests, Tool	6, 136-139	Accessories	43	Surfing Tools	54
Chisels	52, 111	Miter Boxes, Accessories	51, 140	Surveying Instruments	90, 91
Chucks	42, 43	Molding Cutter Heads	19, 27	Switches, Etc.	10, 30, 42
Circuit Interrupters	88	Motors, Accessories	30, 31	Table Saws	16-18, 25, 26
Circular Saws	76, 77	Nail Gun	49	Taps, Dies, Accessories	44, 45
Clamps	13, 50, 83	Nail Sets	49	Terminal Kits	87
Compact Bench Tools	96-98	Nippers	112	Thread Cutters	44, 45
Compressors, Air	96-98	Nut Drivers, Sets	115, 118	Tool Boxes	135
Cord Reels	89	Oil, Oilers	113	Tool Cabinet Cart	137
Cord Sets	89	Organizers	6, 137	Tool Cases	60
Cranes	108	Paint Sprayers, Accessories	98, 101	Tool Holders	56
Cutter Heads, Molding	19, 27	Pallet Trucks	95	Torches, Accessories	35, 36, 47
Dado Blades, Accessories	19, 27	Personal Safety Equipment	57	Tripods	90
Dial Indicators, Accessories	85	Pick-up Tools	45	Trouble Lights	89
Dies, Accessories	44, 45	Pipe-Threading Tools	47	Trowels	56
Dividers	84	Planer-Molders	14	Tubing Tools	46, 47
Dollies	95	Planers, Accessories	13, 73	Twine	56
Dovetailing Attachments	14	Planes	54	Vacuum Cleaners, Accessories	23
Doweling Jigs	59	Plasterers' Tools	56	Vises	13, 48, 50, 51, 60, 109
Drain, Augers	46	Pliers, Accessories	112, 113	Wedges	53
Drill Accessories	56-60	Plumbers' Tools, Accessories	44-47	Welders, Arc, Accessories	33, 34
Drill Presses	12, 13, 24-26, 61, 121	Pneumatic Tools	98-105	Welders Oxy-Acetylene, Mapp	36
Accessories	12, 13	Polishers, Accessories	64, 65	Welders' Personal Protectors	34
Drills:		Pouches, Tools	56	Whetstone	54
Electric	62, 63	Power Outlet Strips	88	Winches	106
Hand	54	Power Plants	94	Wire Brushes	56
Dry-Wall Tools	56	Power Washers	94	Wire Strippers	87, 88
Dust Collectors	22, 64, 79	Precision Tools	83-85	Wiring Supplies	88-88
Electric Testers	86, 88	Propane Torches, Accessories	47	Wood Turning Lathe, Access.	9, 26
Electrical Outlets	88	Protractors	55, 85	Woodworker's Bench	5
Electricians' Tools	87-89	Pruning Saw, Blades	52	Work Benches	5, 6
Engraving Tools	68	Pullers	52	Work Centers	4, 5, 7
Extension Cords	89	Pulleys	30, 31	Work Lights	6, 32, 89
Eye Protectors	57	Pumps, Air	99	Wrecking Bars	52
Face Protectors	57	Punches	54, 111	Wrenches, Accessories:	
Face Shields	57	Radial Saws	20, 21, 25	Adjustable	118
Fans, Ceiling	57	Ratchet Wrenches, Accessories	115, 117, 119	Air	103, 104
Fasteners	48, 52, 137	Reamers	45	Box-End	115-117
Fiberglass Repair Kits	111	Rechargeable Batteries	89	Combination	115-117
Files, Accessories	45	Reciprocating Saws	73	Cross Rim	111
Fire Detectors	57	Respirators	57	Distributor	110
Fire Extinguishers	57	Rethreading Tools	44	Hex Keys	120
Flaring Tools	46, 47	Rivet Tools, Accessories	39	Ignition	118
Fluorescent Lighting	89	Rotary Grinders	68	Metric	115, 120-123, 125
Framing Tools	22, 48, 49	Router, Accessories	60, 78-82	Open End	116, 117
Gauges	83, 85, 110	Rules	85	Pipe	46, 47
Gear Pullers	110	Rustproofing Kits	111	Ratchet	115, 117, 119
Generator Engines	94			Setscrew	120, 121
Glass Cutters	48			Socket	115, 120-125
Glue Guns, Glues	49, 50			Spark Plug	121
Goggles	57			Tap	118
Grinders, Accessories	36-38, 42, 68			Torque	134

Do-It-Yourself Books

Buy any 2 or more and **Save 10%**

Choose from more than 40 different "how-to" paperback books on a variety of do-it-yourself projects. These books cover many areas of interest in general woodworking, home remodeling, plumbing, electrical repairs and more. All books give simplified, step-by-step instructions with black-and-white illustrations to help guide every facet of your project.

TITLES, ORDERING INFORMATION:

State catalog number and book number when ordering.

Catalog Number	Book No.	Titles	No. of pages	Wt. oz.	Price each	2 or more ea.
General Woodworking and Building						
9 GT 2915H	669	How to Build Birdhouses, Birdfeeders	66	8	\$2.50	\$2.25
	649	How to Build a Garden Tool House, Child's Playhouse	82	8	2.50	2.25
	634	How to Build Storage Units	98	8	2.50	2.25
9 GT 2915H	690	How to Build Bars	114	8	2.50	2.25
	672	How to Build Workbenches, Sawhorse Tool Chest	98	8	2.50	2.25
	677	How to Plan and Build a Home Workshop	98	8	2.50	2.25
	664	How to Build Bookcases	98	8	2.50	2.25
	630	Build Sportsmen's Cabinets and Racks	98	8	2.50	2.25
9 GT 2915H	756	Scroll Saw Projects	130	8	2.50	2.25
	612	Build Wall-to-Wall Stereo Cabinets	130	8	2.50	2.25
	607	Build Outdoor Projects, Fences, Gates	162	8	2.50	2.25
9 GT 2905H	609	How to Build an Addition	96	12	3.50	3.15
	632	Build a Vacation or Retirement House	194	12	3.50	3.15
	697	Forms, Footing, Foundations, Framing	210	12	3.50	3.15
	751	How to Build Pet Housing	178	12	3.50	3.15
9 GT 2905H	771	Toy-making and Children's Furniture Simplified	178	12	3.50	3.15
	753	How to Build Dollhouses-Furniture	194	12	3.50	3.15
	754	How to Build Outdoor Furniture	130	12	3.50	3.15
	761	How to Build Colonial Furniture	258	12	3.50	3.15
	763	How to Build a Two Car Garage with Apartment Above	194	12	3.50	3.15


Catalog Number	Book No.	Titles	No. of pages	Wt. oz.	Price each	2 or more ea.
Home Remodeling and Repair Books						
9 GT 2915H	623	How to Repair, Refinish and Reupholster Furniture, Caning Simplified	98	8	\$2.50	\$2.25
	613	How to Build or Enclose a Porch	82	8	2.50	2.25
	605	How to Apply Paneling	114	8	2.50	2.25
	603	How to Build a Dormer	82	8	2.50	2.25
9 GT 2915H	696	Roofing Repairs and Application	98	8	2.50	2.25
	665	How to Modernize an Attic, Install a Skylight	82	8	2.50	2.25
	663	How to Build a Two Car Garage	66	8	2.50	2.25
	658	How to Build Kitchen Cabinets, Room Dividers and Cabinet Furniture	98	8	2.50	2.25
	631	How to Build Patios and Sundecks	98	8	2.50	2.25
	617	Concrete Work Simplified	130	8	2.50	2.25
	615	How to Modernize a Basement	98	8	2.50	2.25
	608	How to Modernize a Kitchen	82	8	2.50	2.25
	606	How to Lay Ceramic Tile	98	8	2.50	2.25
	695	How to Install Protective Alarm Devices	130	8	2.50	2.25
9 GT 2915H	679	How to Build a Stable and a Red Barn Tool House	178	8	2.50	2.25
	680	How to Build a One Car Garage or Convert a Garage to Stable	146	8	2.50	2.25
	682	How to Add an Extra Bathroom	162	8	2.50	2.25
	683	Carpeting Simplified	146	8	2.50	2.25
	684	How to Transform a Garage into a Living Space	130	8	2.50	2.25
	668	Bricklaying Simplified	146	8	2.50	2.25
9 GT 2905H	611	How to Build Greenhouses and Sunhouses	114	8	2.50	2.25
	674	How to Install a Fireplace	242	12	3.50	3.15
	685	How to Rehabilitate Abandoned Buildings	258	12	3.50	3.15

Catalog Number	Book No.	Titles	No. of pages	Wt. oz.	Price each	2 or more ea.
Plumbing and Electrical Repair						
9 GT 2915H	675	Plumbing Repairs Simplified	162	8	\$2.50	\$2.25
9 GT 2915H	694	Simplified Electrical Repairs	114	8	2.50	2.25

Throughout this catalog we've tried to show you that

YOU CAN DO IT

Whether at home, on the farm or in the shop, it's possible for you to complete many projects successfully with the help of Craftsman® tools and a little "know-how." Not sure about the "know-how?" Chances are that your questions will be answered in one of our many Do-It-Yourself Books, where you'll find helpful instructions to guide your projects along and show you "How-To-Do-It."

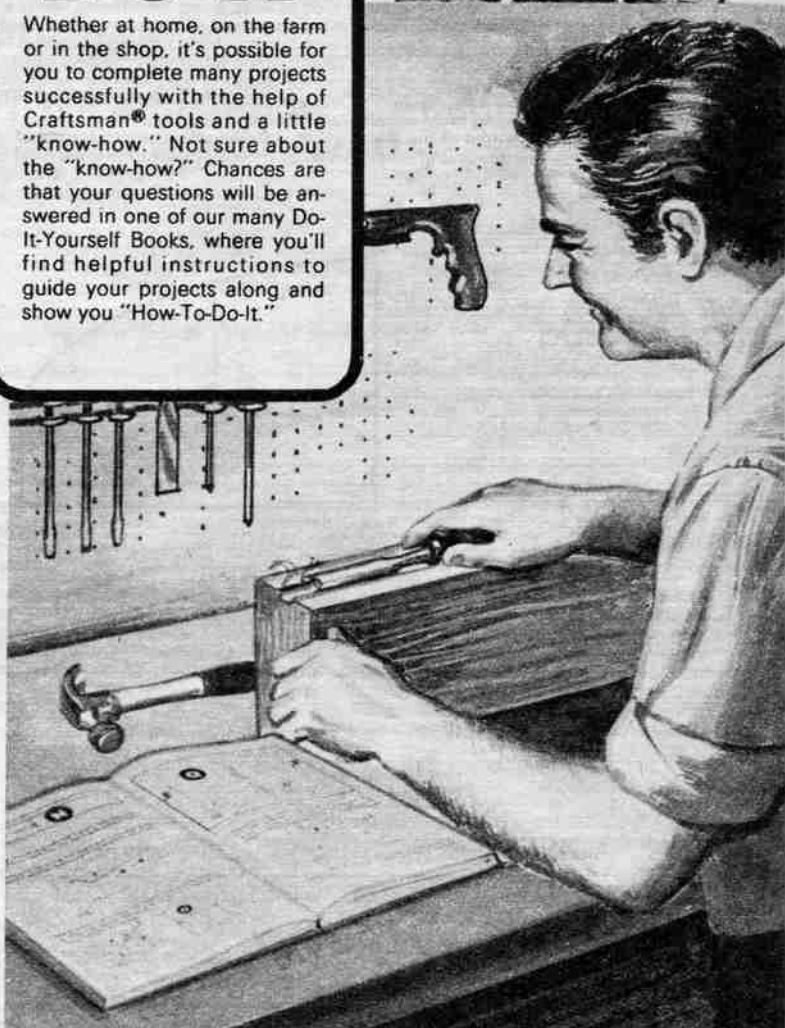

How-To-Install Booklets... yours absolutely FREE!

Complete coupon and send it to Sears

Send me your FREE "How To Install" Booklet (check one or more)

- | | |
|---|---|
| ☐ Submersible Pumps (39 GT 7476) | ☐ Patio Covers (39 GT 7409) |
| ☐ Water Heaters (39 GT 7477) | ☐ Garage Door Openers (39 GT 7408) |
| ☐ Plastic Pipe (39 GT 7479) | ☐ Soffits (39 GT 7405) |
| ☐ Elec. Air Cleaner (39 GT 7471) | ☐ Dishwashers (39 GT 7292) |
| ☐ Vanities and Lav. (39 GT 7474) | ☐ Garbage Disposal (39 GT 7293) |
| ☐ Fireplaces (39 GT 7480) | ☐ Countertops (39 GT 7446) |
| ☐ Direct Vent (39 GT 7486) | ☐ Kitchen Cabinets (39 GT 7445) |

(Please print clearly)

Name _____
 Address _____ Apt. No. _____ City _____
 State _____ Zip code _____ Phone No. _____



Craftsman 12-piece Do-It-Yourself Tool Kit

Starter Set gives you the basics for beginning your tool collection **\$20.00**

SET INCL: Key-hole saw with 10-inch steel Kromedge® blade and plastic handle. Scratch awl with 3 1/4-inch tempered steel blade. Putty knife with flexible, 1 1/4-inch wide steel blade. Claw hammer with 16-oz., drop-forged steel head and hickory handle. 8-ft. retractable tape measure with 1/4-inch wide tape . . . divided in 16ths of an inch. 5 screwdrivers: 1/4x6, 3/16x4 and 1/8x2 slotted, Nos. 1 and 2 Phillips, Screw starter and 4-way pocket screwdriver.

ORDERING INFORMATION: Separate prices total \$23.36. 9 GT 41103—Shipping weight 3 lbs. 12 oz. . . . Set \$20.00

COMPARE SLA6JD **Sears** 71

Hard Facts on Bench Power Tools

Maximum Developed Horsepower

If you manually push a car from a standing start on a level road, it takes an extra effort to start the car moving, a smaller, but steady effort to keep it rolling and occasional spurts of extra effort to roll the car over bumps. It is the same with an electric motor attached to a load. A motor has so much **STARTING TORQUE** (initial push), so much **RUNNING TORQUE** (steady push), and so much **BREAKDOWN** or **MAXIMUM DEVELOPED TORQUE** (maximum push), beyond which it stalls.


The **RATED HP** of a motor is its running torque at its rated running speed. The motor can be run continuously at its rated HP without overheating. If the motor is required to give an extra spurt of effort while it is running, the motor is overloaded and develops extra horsepower. The most horsepower which can be expected from a motor to handle this extra effort is its **MAXIMUM DEVELOPED HORSEPOWER**. This overload capacity is a temporary one. If the motor is overloaded too long or too often, it will heat up and may blow a fuse or trip a circuit breaker. To reduce the chance of damage, a motor should not be overloaded continuously.

Just as a person needs a certain amount of food to keep going, so a motor needs a continuous supply of amperage and, as a person, when it works harder an extra amount of fuel is needed. When a saw motor is running, but not cutting wood, the motor is running at approximately 3600 RPM. The motor is not delivering any work; therefore, no horsepower is developed. As wood is pushed into the saw blade at a given rate of feed, the torque of the motor increases and the motor delivers work or **DEVELOPS** only enough horsepower to cut the wood at that rate of feed. During this time, the motor is drawing more amperage than at idle.

Since the horsepower output of the motor varies with the rate at which the wood is being cut, the performance of a saw motor is often described by means of a torque versus RPM curve.

TORQUE VERSUS RPM CURVE

(Values in parenthesis are for motor No. 9 GT 1217C)

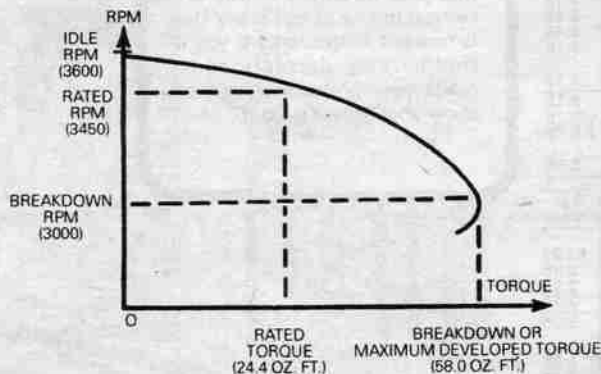

The curve is typical for most single-phase, 2-pole, 60-Hz., induction-run, AC motors. Torque and RPM values for the 9 GT 1217C motor, which is furnished with the 9 GT 29843N4 saw outfit, are shown in parenthesis to help illustrate the use of this curve.

When the saw is not cutting wood, the motor is developing no useful torque and is turning at almost 3600 RPM. As the saw begins to cut wood, the motor RPM decreases and the motor develops more torque.

When the wood is being fed into the saw so that the motor RPM is reduced to approximately 3000, then the motor is developing its maximum torque of 58.0 ounce feet.

In order to determine horsepower, the following formula is used:

$$\frac{\text{Torque (oz. ft.)} \times \text{RPM}}{84,000} = \text{HP}$$

Applying the known factors of the 9 GT 1217C motor to the formula:

$$\frac{58.0 \times 3000}{84,000} = 2.071 \text{ Maximum Developed HP}$$

$$\frac{24.4 \times 3450}{84,000} = 1.002 \text{ Rated HP}$$

NOTE: Torque: That which produces or tends to produce rotation, torsion or turning forces. Torque is measured in ounce-inches (oz. in.), ounce-feet (oz. ft.) and pound-feet (lb. ft.)

Horsepower: Motor torque multiplied by speed, or a measurement of the rate of work that an electric motor is capable of delivering.

*The number 84,000 is an established value used in computing horsepower when torque is measured in ounce-feet (oz. ft.) and motor speed is measured in revolutions per minute (RPM).

Hard Facts on Portable Electric Tools

UL Nameplate Amp Ratings

Underwriters' Laboratories (UL) require that UL listed portable electric tool nameplates specify the current drawn by the tool under average loading. This current is expressed in amperes (abbreviated amp(s)) which is a measure of the rate at which the electricity flows through a circuit. The nameplate amps will not correlate to a motor's maximum developed horsepower (HP)† because under average loading, our portable electric tools require less than the maximum horsepower.

Nameplate amps provide guidance for determining if a tool can be used in a particular electrical system. For example, if 20 amps are specified on a nameplate and your electrical system has a 15-amp fuse or circuit breaker, then the 20 amps drawn by the tool may blow the fuse or trip the circuit breaker. The same thing may occur if two 10-amp tools are used at the same time.

†The force available to push the electricity through the circuit is measured in volts and the actual power of the flowing current is measured in watts. †For an explanation of max. developed HP see info at left.

Here's what we mean by Double Insulation and why we use 2-prong plugs

The 3-wire system of grounding a tool, with the third wire in the power cord, usually requires an adaptor to connect the 3-prong plug to most household outlets. There's no adaptor needed with Craftsman double insulated tools. They have a 2-prong plug that connects to regular, household outlets.

Double insulation denotes an insulation system composed of functional insulation and protective insulation, with two insulations separated and so arranged that they are not simultaneously subjected to same deteriorating influences (temperature, contaminants and so forth) to same degree.

To do this, Craftsman double insulated tools require the use of nonconductive, electrical insulating materials in the construction of structural members such as housings and handles. Craftsman double insulated tools are made primarily from two nonconducting plastics, polycarbonate and polyester. High-impact polycarbonate, which usually has a glossy appearance, is also used in aircraft windows and telephones. Heat-resistant, glass-reinforced polyester most often has a matte or painted finish and is also used extensively in auto bodies and boat hulls.


So—even if the primary insulation should break down for any reason—there's always the secondary insulation system ready to take over. That's why there's no need for a third wire on double insulated portable electric tools. (Note, however, that only tools described as "DOUBLE INSULATED" offer this feature.)

Be ready for the METRIC conversion

Metric measurements are rapidly becoming more and more commonplace as the United States begins its conversion to the International System of Measurement. In a few years this conversion should be well underway as the leading automobile manufacturers produce more cars with metric fasteners. In order to help you service these models, Sears offers a wide range of METRIC tools. Be ready. Make Sears your METRIC headquarters.

This year we've offered our most complete line of power and hand tools ever. But growth doesn't stop here. In the future we will continue expansion to meet the ever-changing needs of you, our customer.

8 steps to better tools... the story of a CRAFTSMAN® Open-end Wrench

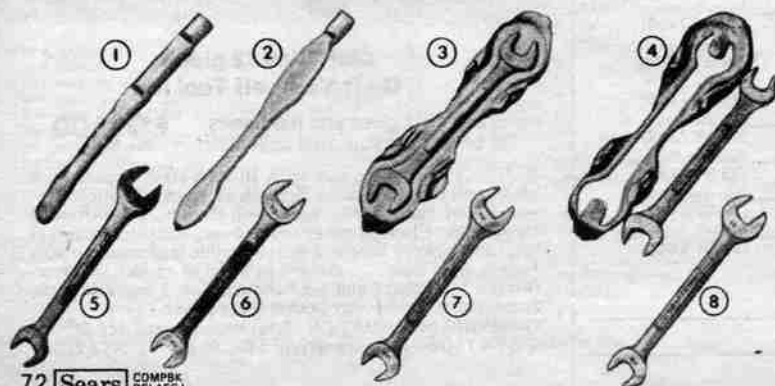

Every Craftsman flat wrench undergoes an 8-step process that makes it so strong it's fully warranted for the life of the tool.

(1) The tool begins as a bar of select alloy steel chosen for its inherent strength and resistance to brittleness. From this bar the wrench is drop-forged. After the bar has been heated to over 2000° F, it is semi-flattened by the initial blow of the forging hammer.

(2) The bar, still red hot, is "rough formed" by the second blow.

(3) Using a die, the true shape of the wrench emerges after being hit by the semi-finishing and finishing blows of the forging hammer.

(4) The "flash" is trimmed off the completely forged wrench.

(5) After forging, the wrench is heat-treated and cooled under controlled conditions to prepare it for machining and rough grinding.

(6) The faces and panels are machined and ground for precision. The wrench is then hardened and tempered for toughness.

(7) Ground surfaces are polished and buffed.

(8) Finally the tool is dipped into an electrically charged nickel-chrome solution. This electro-plating permanently bonds a coating to the wrench for rust and corrosion resistance.

CRAFTSMAN® Reciprocating Saw

So powerful it can cut through wood up to 1 foot thick, solid aluminum 2 inches thick and cast-iron 1 inch thick



Use to rough-cut 2x4's quickly before exact cut when remodeling

Use to start holes and rough-cut window, vent and outlet openings

Cut flush to wall or floor by changing blades and rotating blade clamp

Cuts logs up to 1 ft. thick with blade (5)



\$64⁵⁰

- Develops maximum 1/2-HP
- Long, 1 1/4-inch blade stroke
- Trigger-controlled variable-speed from 0 to 2000 strokes per minute

Portable Electric Tool Shop



MOTOR, BEARINGS: Variable-speed motor develops maximum 1/2-HP. Trigger-controlled variable speed from 0 to 2000 strokes per minute (no-load speed). Long, 1 1/4-inch stroke. Precision steel helical gears, 100% ball bearings.

HOUSING: High-impact polymer motor housing, assist handle. Aluminum motor frame. Blade clamp rotates. 1/2-inch steel shank. **ELECTRICAL INFORMATION:** Double insulated . . . needs no grounding. 6-ft., 2-wire neoprene cord. 110-120 volts, 60 Hz., AC. 456 watts. UL listed.

ACCESSORIES: Comes complete with 3 blades, wrench.

ORDERING INFORMATION: See warranty on page 63 and Safety Note below.

Order extra blades from chart at right.

9 GT 1706—Shipping weight 9 pounds 12 ounces \$64.50

Single-speed, 3/4-HP Saw (not shown). Like saw above but with single-speed motor, no-load speed of 2000 strokes per minute, and 1-inch stroke. 432 watts.

ORDERING INFORMATION: See warranty on page 63 and Safety Note below. Order extra blades from chart at right.

9 GT 1703—Shipping weight 9 pounds 12 ounces \$49.50

(1 thru 5) CRAFTSMAN Reciprocating Saw Blades

Blades (1 thru 3) and (5) fit CRAFTSMAN, Black and Decker, Milwaukee, Pennacraft, Powr-Kraft, Skil, Shipmate and Stanley reciprocating saws. Blade (4) fits CRAFTSMAN® only.

SIZES, USES, ORDERING INFORMATION:

Item	Catalog Number	Length inches	Teeth per in.	Uses	Wt. each	Each	Five for
(1)	9 GT 28681	6	7	Smooth cuts wood, plastic, comp. board; plunge, scroll cuts	3 oz.	99c	\$4.45
(2)	9 GT 28682	9	3	Fast, rough cuts in wood over 1 inch thick	4 oz.	\$1.39	6.25
(3)	9 GT 28683	6	24	Steel, other metals up to 2 inches thick	3 oz.	1.19	5.35
(4)	9 GT 28684	6	7	Flush cuts wood, plastic, nails	3 oz.	1.19	5.35
(5)	9 GT 28685	12	7	Smooth, deep cuts through wood, plastic, composition board, hard-board; scroll cuts	4 oz.	1.69	7.60

Package of 5 Assorted Blades. Package contains one each of blades (1) thru (5).

9 GT 28688—Shipping weight 11 ounces Package \$5.79

Blades for Reciprocating Saws

1
2
3
4
5

CRAFTSMAN® Plywood-cutting Saw

\$39⁵⁰


Lightweight, high-speed, compact design . . . all make this saw excellent for cutting paneling, plywood

CRAFTSMAN® Power Planer

Simplifies all your planing jobs . . . helps give fast, smooth, professional-looking results

Plane, size and bevel quickly
\$79⁵⁰

3.62-inch rotary cutter requires fewer passes than standard width planes

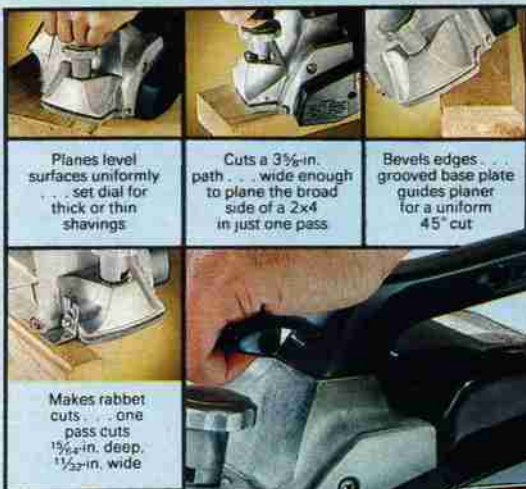

Planes level surfaces uniformly . . . set dial for thick or thin shavings

Cuts a 3 1/4-in. path . . . wide enough to plane the broad side of a 2x4 in just one pass

Bevels edges . . . grooved base plate guides planer for a uniform 45° cut

Makes rabbet cuts . . . one pass cuts 1 1/4-in. deep, 1 1/2-in. wide

MOTOR, BEARINGS, GEARS: Motor develops maximum 3/4-HP with an extra-fast no load speed of 7000 rpm. Permanently lubricated ball and roller bearings. Precision helical gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: 4-inch Kromedge® plywood blade . . . cuts depths up to 3/4 inch at 90°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing, handle and built-in auxiliary grip for 2-hand control. Steel, wrap-around base. Sawdust blower. Includes blade wrench and edge guide.

ELECTRICAL INFORMATION: Double-insulated. 6-foot, 2-wire cord. 110-120 volt, 60-Hz. AC. 360 watts. UL listed.

ORDERING INFORMATION: See warranty, p. 63, Safety Note below.

9 GT 1189—Shipping weight 9 pounds 12 ounces \$39.50

(6) CRAFTSMAN® Carbide-tipped blade for saw above

CONSTR: Kromedge® blade body, 24 tungsten-carbide tipped teeth. For 1/2 to 3/4-inch arbors. Chrome-plated.

USES: For fast, smooth crosscutting and ripping. Maximum rpm, 8000. (Not for ferrous metals, masonry).

ORDERING INFORMATION: See Safety Note below.

9 GT 32452—Shipping weight 8 oz. \$10.99

(7 and 8) CRAFTSMAN® Kromedge® Blades for saw above

CONSTRUCTION: Tough chrome-nickel alloy steel. Chrome-plated to resist rust. Maximum rpm, 8000.

(7) 4-in. Chisel-tooth Blade. 30 teeth. Cross-cuts, rips, miters in hard or soft woods. For 1/2 to 3/4-in. arbors.

(8) 4-in. Crosscut Blade. 100 teeth. For fine-finish work in plywood, fiberboard woods, veneers. For 1/2-in. arbors or 1/4-in. electric drill attachments.

ORDER INFO: See Safety Note below.

Shpg. wt. 4 oz.
9 GT 32401 \$2.49

9 GT 32441 \$2.49

MOTOR, BEARINGS: Develops maximum 3/4-HP. No load speed of 15,000 rpm. Accessible motor brushes. Non-slip timing belt. 100% ball bearings.

HOUSING, CUTTER: Non-glare, die-cast aluminum base. Thermoset polyester motor housing, high-impact polymer handles. Clog-free chip chute deflects shavings away from you. Easy-to-read precision scale . . . turn knob to adjust cutting depth. Plane, size, bevel. Twin, hardened steel blades on a super-wide 3.62-in. rotary cutter. Trigger switch. Blades remove for sharpening.

ACCESSORIES: Includes 90° door bevel fence guide for accurate sizing . . . make rabbeting path 1 1/4-in. deep, 1 1/2-in. wide. Wrench and blade setting guide.

ELECTRICAL INFORMATION: Double-insulated . . . needs no grounding. 6-ft., 2-wire cord. 110-120 volts, 60-Hz., AC. 540 watts. UL listed.

ORDERING INFORMATION: Extra blades for Power Planer sold below. See warranty on page 63 and Safety Note below.

9 GT 1732—Shipping weight 10 pounds 7 ounces \$79.50

Set of 2 Extra Blades for Power Planer

9 GT 17326—Shipping weight 6 ounces Set \$12.89

SAFETY NOTE: Be sure to wear safety goggles when using tools on this page . . . order on page 57. Also see tool cases, p. 60.

COMPBX
DSLAGE

Sears 73



New at Sears CRAFTSMAN® Sheet Metal Nibbler/Shears

2 interchangeable
heads let you
make cuts like these



\$89⁵⁰

Shearing
head

Nibbler
head

CRAFTSMAN Electric Sheet Metal Nibbler/Shears

Cuts sheet metal as thick as 19 gauge (.042 inches). Gives you a cleaner cut than with ordinary, manual shears . . . plus it's much faster.

MOTOR: Motor develops maximum 1/4 HP. No-load speed of 2700 strokes per minute. Single-speed slide switch. Ball and sleeve bearings.

HOUSING: Clam-shell design motor housing of thermoset polyester. Die-cast aluminum gear casing. Comfortable top-mounted handle.

CUTTING HEADS: Two interchangeable, long-lasting cutters of hardened steel. Shearing head starts cuts from edge of workpiece and gives fast, straight cuts. Nibbler head cuts straight lines or intricate, circular patterns . . . compact configuration lets you start cuts from pre-drilled hole anywhere on workpiece.

ELECTRICAL INFORMATION: Double insulated . . . no need for grounding. 110-120-volt, 60-Hertz AC. UL listed. 336 watts, 2.8 amps. 6-foot, 2-wire neoprene cord.

ORDERING INFO: See warranty information on page 63.

Shipping weight 6 lbs. 15 oz.
9 GT 1838 . . . \$89.50

74 Sears COMPBKO SLAGEJ2

CRAFTSMAN® Sabre Saws



One-speed
develops 1/4 HP \$877



Two-speed
develops 1/4 HP \$14⁹⁹



Variable-speed
develops 1/4 HP \$29⁵⁰



Variable-speed
develops 1/4 HP \$39⁵⁰

Our sabre saws start their own cuts . . . no pre-drilling necessary. Bearings are permanently lubricated. Bases tilt 45° left or right. Each has built-in sawdust blower to keep cutting line clear. Blade included.

ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120-v., 60-Hz. AC. UL listed. 6-foot, 2-wire cord.

(1) One-speed, 1/4-HP Saw

MOTOR, BEARINGS: Develops maximum 1/4 HP. Slide switch. No-load speed of 3200 strokes per minute . . . 1/2-inch blade stroke. Sleeve bearings. 240 watts.

HOUSING: Thermoset polyester with top-mounted handle.

ORDERING INFO: See warranty on p. 63, Safety Note on p. 75. Wt. 3 lbs. 15 oz.
9 GT 1717 . . . \$8.77

(2) Two-speed, 1/4-HP Saw

MOTOR, BEARINGS: Develops maximum 1/4 HP. Slide switch. Two no-load speeds of 2600 and 3200 strokes per minute. 1/2-inch blade stroke. Sleeve bearings. 252 watts.

HOUSING: Thermoset polyester with top-mounted handle.

ORDERING INFO: See warranty on p. 63, Safety Note on p. 75. Wt. 4 lbs. 12 oz.
9 GT 1718 . . . \$14.99

(3) Variable-speed, 1/4-HP Sabre Saw

MOTOR, BEARINGS: Develops maximum 1/4 HP. Slide switch controls variable speeds from 0 to 3200 strokes per min. 1/2-in. blade stroke. 1-in. bevel quadrant. Sleeve bearings. 264 w.

HOUSING: Thermoset polyester with convenient, top-mounted handle. Also includes edge guide attachment.

ORDERING INFO: Warranty on p. 63, Safety Note on p. 75.

Shipping weight 4 lbs. 13 oz.

9 GT 17215 . . . \$29.50

NOTE: Carrying case for sabre saws sold on page 60.

(4) Variable-speed, 1/4-HP Saw

MOTOR, BEARINGS: Motor develops maximum 1/4 HP. Trigger controls variable speeds. Trigger lock for speed consistency. No-load speeds from 0 to 3600 strokes per min. 3/8-in. blade stroke. 1-in. bevel quadrant. Ball and sleeve bearings. Externally accessible motor brushes. 288 watts.

HOUSING: Thermoset polyester gear and motor housing, high-impact polymer handle. Cord has 1-inch bend relief. Also includes edge guide with circle-cutting attachment.

ORDERING INFO: See warranty on p. 63, Safety Note on opposite page.

Shipping weight 5 lbs. 10 oz.

9 GT 1070 . . . \$39.50

(A thru M) CRAFTSMAN® Scroller, Sabre Saw Blades

Heat-treated, precision-ground . . . self-centering for a straight, clean cut. Metal-cutting blades of M-2 high-speed steel; wood-cutting blades of high-carbon steel. These blades fit most sabre saws.

(A) Super-fine finishing Blade produces the smoothest cut of any blade we sell. Use for smooth cutting of woods, plastics, laminates up to 3/4 in. thick. Blade 2 1/2 inches long with 20 teeth per inch.

ORDERING INFORMATION: Package of 2. Shipping weight 3 ounces.

9 GT 28761 . . . Package \$1.69

OTHER BLADES—USES, SIZES, ORDERING INFORMATION:

Key	Teeth per in.	Uses	Lgth in.	Catalog Number	Wt. oz.	Pkg. of	Per pkg.
(B)	Knife edge	For smooth cutting of rubber, leather tile, cardboard and wallboard . . .	3	9GT2873	2	2	\$1.09
(C)	32	For mild steel rods, pipe, sheet, etc. . .	3	9GT28701 9GT28706	2 4	2 10	1.19 4.99
(D)	24	For all non-ferrous metals (brass, copper, aluminum, magnesium, etc.) . .	3	9GT28702 9GT28705	2 3	2 10	1.19 4.99
(E)	14	General-purpose—wood, steel and non-ferrous metals, 1/4-in. or thicker . .	3 1/2	9GT2874 9GT28745	2 3	2 10	1.09 4.99
(F)	10	For hardwood, wallboard, plastic, general crosscutting . . .	3 1/2	9GT28712 9GT28716	3 3	2 10	99c 3.99
(G)	10	For finish cuts in plywood or veneer to 1 1/2 in. thick. Tapered back edge . .	3	9GT2876 9GT28764	2 3	2 10	1.29 4.99
(H)	10	Kromedge® Scroller Blade specially designed for intricate scroll cuts . . .	3	9GT28781	3	2	1.39
(J)	7	For fast cutting, ripping of soft wood (1x4's to 2x6's), and plasterboard . . .	3 1/2	9GT28711 9GT28715	3 4	2 10	59c 2.49
(K)	7	For cutting wood up to 3 in. thick by saws with 1-in. or longer stroke . . .	6	9GT2875	2	Each	1.09
(L)	3	Deep-angle cuts in wood to 5 in. thick by saws with 1-in. or longer stroke . .	6	9GT2879	2	Each	1.09
(M)	7	For cutting flush to wall or joints . . .	3 1/2	9GT2877	3	Each	1.09



Heavy-duty Table for sabre saw or router \$39⁹⁹

Holds your sabre saw or router steady for greater accuracy as you guide workpiece



5

6 Holder

7 Edge Guide

(5) Sabre Saw and Router Table

Die-cast aluminum top is stronger than ordinary stamped steel tables. Holds your sabre saw or router steady for edging or cutting. Sabre saw or router mounts quickly beneath table. Fits all Craftsman sabre saws and routers (except router 9-1735). Also fits most other models.

CONSTRUCTION: Heavy-duty, die-cast aluminum top with cast reinforcing ribs underneath. Ridges on top collect sawdust, help prevent it from caking under workpiece. Fence positions adjust by unscrewing wingnuts and sliding into place. Fences have holes for attaching wood fences (included). Heavy-gauge steel legs have holes for mounting on workbench. Hinged guard covers moving blade or bit as it rides smoothly over stock.

MITER GAUGE: Guide workpiece at the exact angle you set. Guided by 3/4-in. slot on table top.

DIMENSIONS: Overall 13 1/4 x 18 x 11 inches high. Table top measures 18 x 13 1/4 inches.

ORDERING INFORMATION: Shipped unassembled.
9 GT 25444—Shpg. wt. 11 lbs. 2 oz. . . . \$39.99

Accessories

(6) Holder for extra blades, drill bits

Attaches to power cord. Keeps sabre saw blades or drill bits close at hand. Chart on side of holder shows sabre saw blade types. Snap-open lid. For any Craftsman sabre saw or drill.

ORDERING INFO: Wt. 4 oz.
9 GT 2871 . . . 99c

(7) Circle-cutting and Edge Guide. For cutting circles, straight lines and intricate curves. Use with any Craftsman sabre saw.

ORDERING INFO: Wt. 10 oz.
9 GT 27959 . . . \$2.89

CRAFTSMAN® Sabre Saws with automatic scrolling

Only at Sears! Blade pivots freely as you apply pressure to the handle
... follows intricate lines of cut without having to turn saw

(9 and 10) 1/3 and 1/2-HP Automatic Scrolling Sabre Saws

HOUSING: Heat-resistant thermoset polyester motor housing, high-impact polymer handle. Motor brushes externally accessible. Counterbalance design smooths out vibration, reduces operator fatigue. Steel base tilts up to 45° right or left for bevel cuts; 1-inch bevel quadrant. Steel saw bar swivels a full 360°. Built-in sawdust blower.

ACCESSORIES: Includes blade; circle-cutting and edge-guide attachment.

ELEC. INFO: Double insulated, needs no grounding. 110-120 v. 60 Hz., AC. UL listed. 6-ft. 2-wire neoprene cord.



(8) 1/4-HP Sabre Saw with manual scrolling

Turn knob to guide saw and make cuts

\$49.50

- Trigger-controlled variable speeds
- Cuts with 3/8-inch blade stroke
- Ball and sleeve bearings

Manually-controlled scrolling mechanism lets you cut intricate designs.

MOTOR, BEARINGS: Develops maximum 1/4 HP. Trigger-controlled variable no-load speeds from 0 to 3600 strokes per minute... with 3/8-inch blade stroke. Ball and sleeve bearings.

HOUSING: Heat-resistant thermoset polyester. Counterbalance design smooths out vibration, helps reduce operator fatigue. Steel base tilts 45° right or left for bevel cutting. Built-in sawdust blower keeps cutting line clear.

ELECTRICAL INFORMATION: Double-insulated... needs no grounding. 110-120 volts, 60 Hz. AC. 290 watts. UL listed. 6-foot, 2-wire cord.

ACCESSORIES: Includes blade; circle-cutting and edge-guide attachment.

ORDERING INFORMATION: See warranty on page 63, safety note below.

Shipping weight 5 pounds 10 ounces.
9 GT 1072 \$49.50

Safety Note: Protect your eyes. Use safety goggles sold on p. 57.

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



(9) 1/3-HP Automatic Scroll Saw

\$64.50

- Trigger-controlled variable speeds
- Cuts with 3/4-inch stroke
- Ball and sleeve bearings

Sectional, non-glare aluminum gear housing.

MOTOR AND BEARINGS:

Motor develops maximum 1/3 HP. Pull trigger to control variable speeds. No-load speeds from 0 to 3200 strokes per minute... with 3/4-inch blade stroke. Variable speeds and longer blade stroke helps blades last longer. Ball and sleeve bearings. Runs on 336 watts.

ORDERING INFORMATION: See Warranty on page 63, safety note at left.

Shpg. wt. 6 lbs. 10 oz.
9 GT 17251 \$64.50

Control dial with 12 speeds lets you match the speed to the job



(10) 1/2-HP Automatic Scroll Saw

\$79.50

- 12 pre-set speeds from 1300 to 2500 strokes per minute are dial-controlled
- Cuts with 1-inch blade stroke
- 100% ball bearing motor

Sectional, non-glare aluminum housing. With protective blade chip shield.

MOTOR, BEARINGS: Develops maximum 1/2-HP. 12 pre-set, no-load blade speeds from 1300 to 2500 strokes per minute. Rear-mounted dial lets you choose speed. Trigger locks for speed consistency. One-inch stroke with feedback circuitry that helps keep speed consistent. A choice of speeds and longer blade stroke help blades last longer. 100% ball bearing motor. 420 watts.

ORDERING INFORMATION: See Warranty on page 63, safety note at left.

9 GT 1728—Shipping weight 9 pounds 4 ounces \$79.50

(11) Side Cutter Attachment for 1/2-HP Saw above. For flush wall cuts.

ORDERING INFORMATION: Also fits former 9-1726.


9 GT 27715—Shipping weight 6 ounces \$5.89



*Sears * Best*

YOU CAN DO IT

with Sears' scrolling sabre saws. The scrolling sabre saw is one of the most versatile portable electric tools at home or in the shop. With the variety of blades available you can cut metal tubing and pipe for plumbing repairs, cut intricate curves and bevels for hobby or pattern work and cut openings in wall-board or paneling for outlets and fixtures. These are just a few of the possibilities. All it takes is a little know-how and you can do it!

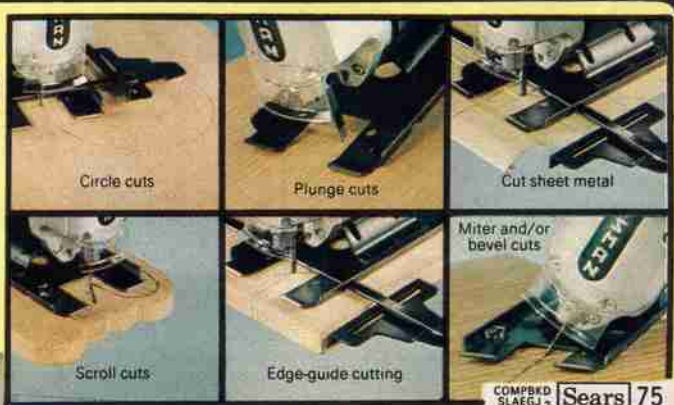

COMPBK SLAEG 2 **Sears** 75



SKIL® Saws with worm-drive gearing

Toughest gearing available
... unsurpassed in its
ability to stand up to
tough materials

7¼-inch SKIL® Saw

Worm-drive gearing is unsurpassed in torque and the ability to handle severe shock loads. Designed to handle the demanding treatment of industry professionals, it can cut through wood, metal, stone and tough composition materials, to make this saw one of the finest you can buy.

MOTOR, BEARINGS, GEARS: Develops maximum 2 HP. . . no-load speed of 4400 RPM. 100% ball bearings. High-torque worm drive gearing. Externally accessible spring-loaded motor brushes.

BLADE, CUTTING DEPTH: With 7¼-inch combination blade . . . cuts wood up to 2¾ inches thick at 90°, up to 1½ inches thick at 45°. With proper blade cuts metal and stone.

HOUSING: Die-cast aluminum gear and motor housings, blade and swing guards. Non-glare stain finish. Two plastic handles for firm control. One-piece wrap-around base with depth, bevel adjustments. Sawdust blower.

ACCESSORIES: SKIL diamond arbor blade and wrench included.

ELECTRICAL INFORMATION: 110-120 volt, 60-Hertz, AC. 1560 watts, UL listed. 8-foot, 16-gauge, 3-wire rubber cord with strain relief.

ORDERING INFORMATION: Warranted by SKIL® Company. Write for free copy, see page 69.

9 GT 1077C—Shipping weight 21 pounds . . . \$169.50

6½-inch SKIL Saw. Like above except motor develops maximum 1½ HP. No-load speed of 4600 rpm. 6½-inch blade . . . cuts wood up to 2 inches at 90°, up to 1¾ inches at 45°. 1375 watts.

9 GT 1076C—Wt. 19 lbs. \$159.50

Steel Blades for SKIL® Saws

6½-inch Blade
Shipping weight 12 ounces.
9 GT 32306 . . . \$2.99

7¼-inch Blade
Shipping weight 12 ounces.
9 GT 32307 . . . \$3.49

8¼-inch Blade
Shipping weight 14 ounces.
9 GT 32308 . . . \$3.99



8¼-inch SKIL® Saw. Like above except motor develops maximum 2½ HP. No-load speed of 4300 rpm. 8¼-inch blade . . . cuts wood up to 2¼ inches at 90°, up to 1¾ inches at 45°. 1520 watts.

9 GT 1078C—Wt. 23 lbs. \$179.50

Carbide Blades for SKIL® Saws

6½-in. Blade
Shipping weight 1 pound.
9 GT 32453 . . . \$13.99

7¼-inch Blade
Shipping weight 1 lb. 4 oz.
9 GT 32455 . . . \$16.99

8¼-inch Blade
Shipping weight 1 lb. 10 oz.
9 GT 32456 . . . \$19.99

On the job or in the home



On the job



in the home



\$1999

7-inch 1¼-HP Saw

- No-load speed, 5000 rpm
- Sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops maximum 1¼ HP. No-load speed, 5000 rpm. Permanently lubricated sleeve bearings. Spur gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: With 7-in. combination blade. Cuts wood up to 2½ in. thick at 90°, up to 1½ in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Blade, wrench.

ELEC. INFO: Double insulated. 110-120-v., 60-Hz. AC. 1020 watts. 6-ft. 2-wire cord.

ORDER INFO: Warranty, opp. page. 9 GT 1180—Wt. 11 lbs. 6 oz. \$19.99

7-inch, 1½ HP. Like above but develops maximum 1½ HP. No-load speed, 5100 rpm. 1080 watts.

9 GT 1181—Wt. 11 lbs. 6 oz. \$34.50

Rip Guide for 1¼, 1½-HP saws.

9 GT 27679—Wt. 10 oz. . . . \$1.99



\$4950

7-inch 1½-HP Saw

- No-load speed, 5200 rpm
- Ball and sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops max. 1½ HP. No-load speed of 5200 rpm. Permanently-lubricated ball and sleeve bearings. Spur gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: With 7-in. combination blade. Cuts wood up to 2½ in. thick at 90°, up to 1½ in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle and auxiliary grip provide firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Blade, wrench, rip guide with 3¼-inch face.

ELECTRICAL INFORMATION: Double-insulated. 110-120-v., 60-Hz., AC. 1140 watts. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See Safety Note above, Warranty, opposite page.

Shipping weight 11 lbs. 6 oz.

9 GT 1082 . . . \$49.50

Safety Note: Wear safety goggles when using saws on these 2 pgs. See pg. 57



New at Sears . . . Circular Saw/Router Table Guide

Gives your circular saw the versatility of a radial saw

\$8999



Outrigger Extension (sold separately) lets you work larger pieces
\$1499

CONSTRUCTION: 62-lb. density particleboard top, ½-in. thick. Extruded-aluminum "I"-beam rails, 60-in. long, 13x13x½-in. steel saw plate with nylon glides, black oxide finish. 33½-in. long steel legs. Adjustable fence with metal protractor, steel locking clamps.

ORDERING INFORMATION:

9 GT 17155N—Shipping weight 70 pounds . . . \$89.99


Outrigger Extension for Saw Guide. Particleboard top 20-inches long. Steel legs, 34½-inches.

Shipping weight 10 lbs.

9 GT 17156C . . . \$14.99

CRAFTSMAN® Miter Arm

Gives your circular saw the accuracy of a radial arm saw

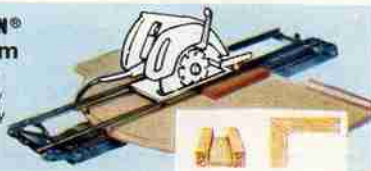

CONSTRUCTION: Steel guide rails, table of particleboard, steel clamps. Cuts wood up to 2x12 in. Fits all CRAFTSMAN saws on these two pages except 9 GT 1188C. Fits most other saws with a 6-in. or smaller base.

ORDER INFO: Unassembled. See "N" suffix page 69.

9 GT 17151N—Shipping weight 22 pounds . . . \$36.99

CRAFTSMAN® Saw Guide

Cuts any angle through a 4x8 ft. panel. Cuts panels up to ¼ in. thick. 108-in. long guides.



CONSTRUCTION: Two aluminum guides, with clamps for attaching to top and bottom of panel. Each guide consists of two interlocking sections. Use fully assembled for long cuts, or use individual sections with clamps for short cuts.

ORDERING INFORMATION: Sent unassembled.

9 GT 17152—Shipping weight 9 lbs. 2 oz. . . . \$39.99

CRAFTSMAN® Circular Saws will fit your needs

Each saw has accessible motor brushes. All bearings are permanently lubricated



Each saw does bevel, miter cuts, or both for compound cuts. Easy-view blade port lets you keep eye on cutting line



FULL 1-YEAR WARRANTY ON CRAFTSMAN PORTABLE ELECTRIC TOOLS

If this CRAFTSMAN Portable Electric Tool fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the U.S. and Sears will replace it, free of charge. If this CRAFTSMAN Portable Electric Tool is used for commercial or rental purposes, this warranty applies only for 90 days from the date of purchase. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.



\$59⁵⁰

7 1/4-inch 1 3/4 HP Saw

- No-load speed, 5200 rpm
- Ball and sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops maximum 1 3/4 HP. No-load speed 5200 rpm. Permanently-lubricated ball and sleeve bearings. Spur gearing. Accessible motor brushes.

BLADE, CUTTING DEPTH: With 7 1/4-inch combination blade . . . cuts wood up to 2 1/4 in. thick at 90°, up to 1 15/16 in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester handle, auxiliary grip for firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Includes blade, wrench and rip guide with 4-inch face.

ELECTRICAL INFORMATION: Double-insulated. 110-120-volt, 60-Hz., AC. 1140 watts. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION:

See warranty above, safety note, opposite page. Shpg. wt. 11 lbs. 4 oz.
9 GT 1085 \$59.50



7 1/4-inch, 2-HP Saw

- No-load speed of 5400 rpm
- Ball and roller bearings
- Precision helical gearing

\$69⁵⁰

MOTOR, BEARINGS, GEARS:

Develops maximum 2 HP. No-load speed of 5400 rpm. Permanently-lubricated ball and roller bearings. Precision helical gearing. Externally accessible motor brushes.

BLADE, CUTTING DEPTH:

With 7 1/4-inch combination blade. Cuts wood up to 2 1/4 inches thick at 90°, up to 1 15/16 inches thick at 45°. External blade clutch.

ACCESSORIES: Blade, wrench, rip guide with 4-inch face.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle with auxiliary grip for firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ELECTRICAL INFORMATION: Double-insulated. 110-120-volt, 60-Hz., AC. 1320 watts. UL listed. 6-foot, 2-wire cord.

ORDER INFO: Warranty above, safety note, opp. page.

9 GT 1086—Shipping weight 11 lbs. 12 oz. \$69.50

(1) Circular Saw Guide

Can be used as a protractor for laying out angle cuts. Use with any portable circular or sabre saw. Adjust from 0° to 72° right or left. Steel.

ORDERING INFO:

Shpg. wt. 2 lbs. 4 oz.
9 GT 1719 \$5.99

(2) Gear Lubricant

Compound to help keep your circular saw as well as all your other electric tools working smoothly. 4-ounce tube.

ORD. INFO: Wt. 5 oz.
9 GT 5573 Tube 79c

(3) Cut-off Wheels

Resinoid bonded 1/8-inch thick. For 1/2, 3/8-inch arbors.

ORDERING INFO: Not for table saws, wood.

Catalog Number	Diam.	Wt. oz.	Each
Aluminum oxide			
9 GT 64683	6 in.	7	\$3.29
9 GT 64684	7 in.	14	3.49
9 GT 64685	8 in.	14	3.79
Silicon carbide			
9 GT 64661	6 in.	7	3.29
9 GT 64662	7 in.	9	3.49
9 GT 64663	8 in.	11	3.79



Deluxe Circular Saw Table

- Big 19x29-in. work surface
- Die-cast aluminum top provides sturdier work surface than steel

\$59⁹⁹

Holds circular saw steady for the accuracy of a bench saw. Saw mounts easily beneath table. Fits all Sears saws under 8 inches.

CONSTRUCTION: Die-cast aluminum table top with ridges to help keep workpiece down on table and collect sawdust. Two steel table extensions provide large 551 square inch work surface. Self-aligning rip fence 2 inches high. Complete with miter gauge for exact angle cuts, polycarbonate see-through guard, built-in on/off switch. Table measures 19x29x11 inches high.

ORDERING INFORMATION:

Saw not included. Shipping weight 25 pounds.

9 GT 25965C \$59.99



(4) Heavy-Duty Circular Saw Table

- 26 3/4 x 15 1/2 work surface
- Durable steel top and legs

\$39⁹⁹

(4) Table Saw

CONSTR: Steel. Miter gauge, rip fence. Safety pull-on/push-off switch. Legs can be screwed into your workbench. 26 3/4 x 15 1/2 x 10 1/2 in. high. Saw not incl.

9 GT 25963C—Wt. 25 lbs. \$39.99

(5) Table Extensions. Adds 10-in. of length. Use in front, back, or both sides of table. Set of 2.

9 GT 25973—Wt. 1 lb. 6 oz. Set \$4.99



CRAFTSMAN® Routers with shaft speeds of 25,000 rpm...simplify guiding and allow fast, accurate cuts

When deciding which router is best for your needs, remember that the greater the cutting-power of router, the greater the workload it will perform. All of our routers make cuts in wood up to 1½ inches deep, but our higher horsepower models allow you to make the cuts quicker and more easily



**CRAFTSMAN® 7/8-HP
Medium-duty Router** **\$5950**

- Built-in spindle lock simplifies bit changing
- Visual depth gauge graduated to 32nds of an inch
- Slide-action on/off switch on front of motor housing

**CRAFTSMAN® 1-HP
Heavy-duty Router** **\$7950**

Has the power to cut thru hard wood and the control to cut intricate designs

- Clear chip deflector and built-in worklight
- Self-extracting collet and spindle lock simplify bit changes
- Visual depth gauge resets to zero for identical depths on repeat cuts; graduated to 64ths of an in.
- On/off switch located on handle for continuous 2-handed control



**CRAFTSMAN® 1/2-HP \$2950
Hobby Router**

- Ring-type depth gauge... graduated to 32nds of an inch
- Slide action on/off switch on end cap



(1) 1/2-HP Hobby Router

MOTOR, BEARINGS: 1/2-HP motor generates shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearings for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-inch diameter shank bits. Built-in spindle lock. Wrench for changing bits included.

DEPTH GAUGE: Ring-type depth gauge graduated to 32nds of an inch for cuts to 1½ inches deep.

HOUSING: Die-cast aluminum base, glass-reinforced polyester motor housing, high-impact polymer end cap and handles. Slide-action switch on end cap.

ELECTRICAL INFO: Double-insulated. 110-120-v., 60-Hz. AC. 520 watts. UL listed. 6-ft., 2-wire cord.

ORDERING INFO: Warranty on page 63.

9 GT 1735—Shipping weight 6 pounds \$29.50

(2) Medium-duty 7/8-HP Router

MOTOR, BEARINGS: 7/8-HP generates shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearings for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-inch diameter shank bits. Built-in spindle lock. Wrench for changing bits included.

DEPTH GAUGE: Visual depth gauge with easy-to-read graduations to 32nds of an inch for cuts to 1½ in. deep.

HOUSING: Die-cast alum. base and motor housing, high-impact polymer end cap and handles. Slide-action switch located on front of motor housing. Chip deflector eye shield lets you view work surface clearly.

ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-volt, 60-Hz. AC. 720 watts. UL listed. With 6-foot, 2-wire cord.

ORDERING INFORMATION: Warranty on page 63.

9 GT 1736—Shipping weight 8 pounds \$59.50

(3) Heavy-duty 1-HP Router

MOTOR, BEARINGS: Powerful 1-HP motor generates shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearing motor for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-in. diam. shank bits. Built-in spindle lock for quick, easy bit changes. Wrench for changing bits included.

DEPTH GAUGE: Visual depth gauge has zero-reset feature... lets you obtain identical depth setting on repeat cuts faster and easier than with routers (1 and 2). Graduated to 64ths of an in. for cuts to 1½ in. deep.

HOUSING: Die-cast aluminum base and motor housing, high-impact polymer end cap and handles. Trigger switch conveniently located on handle for continuous two-hand control. Built-in worklight and clear chip deflector eye shield lets you view work easily.

ELECTRICAL INFORMATION: Double-insulated... needs no grounding. 110-120-volt, 60-Hz. AC. 780 watts. UL listed. With 6-foot, 2-wire cord with bend relief.

ORDERING INFORMATION: See Warranty on page 63.

9 GT 1748—Shipping weight 8 lbs. 6 oz. \$79.50

Router as (3) above, but without zero reset feature on depth gauge.

ORDERING INFORMATION: See Warranty on page 63.

9 GT 1747—Shpg. wt. 8 lbs. 6 oz. \$69.50

(4) 1½-HP Super-Router

MOTOR, BEARINGS: Our most powerful 1½-HP motor generates shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearing motor for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-inch diameter shank bits. Built-in spindle lock allows quick, simplified bit changes. Includes wrench for changing bits.

DEPTH GAUGE: Large graduated ring makes accurate settings readily obtainable. Graduated to 64th of an inch for cuts to 1½ inches deep.

HOUSING: Die-cast aluminum base and motor housing. Flat-top, high-impact polymer end cap provides stable surface during bit changes. Large contour-grip handles with trigger-switch permit continuous two-hand control. Vacuum-action draws dust up through handle and into bag. Smooth-gliding phenolic plastic sub base won't mar wood the way metal bases can. With built-in light and clear chip deflector eye shields.

ELECTRICAL INFORMATION: Double-insulated... needs no grounding. Uses 110-120-volt, 60-Hertz, AC. 960 watts. UL listed. 6-foot, 2-wire neoprene cord with bend relief.

ORDERING INFO: See warranty pg. 63.

9 GT 1740—Shpg. wt. 10 lbs. 2 oz. \$119.50

Router as above but without dust pick-up

ORDERING INFO: See warranty pg. 63.

9 GT 1739—Shpg. wt. 9 lbs. 2 oz. \$99.50



**CRAFTSMAN®
Super-Router
With 1½-HP motor**

Gives you at least 50% more cutting power than any other router we offer, plus—it cleans up after itself on full surface cuts

- Exclusive dust pick-up draws 80% of dust produced on full surface cuts... you can view bit and workpiece more clearly—clean-up is faster tool
- View work area more clearly with built-in worklight and chip deflector
- Built-in spindle lock and self-extracting collet simplify bit changes
- Easy-to-read ring-depth gauge lets you make adjustments from 0 to 1½-in. graduated to 64ths of an in.
- Contour grip handles with trigger on/off switch for continuous 2-handed control

With your CRAFTSMAN® Router and Accessories you can carve rough wood into art



Only at Sears Trim-A-Form

Gives you stability when cutting designs in small workpieces

\$24.99

USES: Easily rout precise edges, grooves. You get stability and control needed to make delicate cuts in small workpieces. Ideal for putting finishing touches on plaques. Router sets up in seconds from above. Unit can be hung on wall for out-of-the-way storage. Complete instructions and plans for the two work projects shown are included.

CONSTR: Styrene table swivels and locks 0° to 45° left or right. Unit can be mounted to workbench. Clamp workpiece, pull router thru along steel guide bars. For longer pieces, clamp router and push workpiece thru. For work up to 2 in. high, 8 in. wide, any length.

ORDERING INFORMATION: Fits all Sears routers and most other routers.

Shipping weight 7 lbs. 5 oz.
9 GT 26269 \$24.99



Door and Panel Decorating Kit

\$69.99



Radius Arm Attachment

Carve matching patterns on drawers and doors

Pick any of seven snap-in design sets



Only at Sears . . . rout varying designs on cabinetwork or carve matching patterns. It's easy to do, just snap in corner templates, guide router along rails. Set up quickly for repetitive cuts. For arcs, place router on arm, set radius from 5 to 7 1/2 inches, rotate arm. For any Sears router or other brands over 1/2 HP.

CONSTR: Four 36-in. long anodized aluminum extruded guide rails, 8 clamps with alignment guides, radius attachment, 7 sets (4 per set) of template corners plus one set of blank corners for designing your own pattern. For use on doors or panels to 36x36 in.

ORDERING INFORMATION: Use 3/4-in. bushing or order bushings (2) sold below.

9 GT 25472C—Shipping weight 9 pounds. \$69.99

Router Bits for Decorating Kit above (not shown). Carbide tipped. 1/4-inch diameter shank.

9 GT 25584—Ogee. Shipping weight 3 oz. \$12.99

9 GT 25595—Classic. Shipping weight 3 oz. 12.99

3-pc. Drawer, Door Decorator Bits (not shown).

CONSTRUCTION: Carbide-tipped.

KIT INCLUDES: 1/2-inch ogee bit; 1/2-inch classic bit; 1/2-in. V-groove chamfering bit.

ORDERING INFORMATION: 9 GT 22115—Shipping weight 6 ounces. \$29.99

Old English

ORIENTAL

Script

New at Sears 3-dimensional Rout-A-Form Pantograph

Route surface designs or carve 3-dimensional patterns

\$29.99



USES: With Sears exclusive 3-D Pantograph and your router you can make signs, plaques, decorations and more. Achieve finished results that have beautiful, professional look. Three-dimensional carving gives your designs depth and dimension. Trace lettering, copy favorite drawing or even invent designs of your own for fun or profit.

HOW TO USE: Router attaches easily to unit. Simply trace pattern to create beautiful wood carvings in three sizes: 40%, 50% and 60% reduction of the original pattern.

CONSTRUCTION: Styrene base 6 1/2x16x1/4-inch thick. Steel bars.

ACCESSORIES: Includes five different types of letters; Oriental, modern, computer, script and Old English. Each style has upper and lower case letters, for a total of 52 each (except computer, which is upper case only). Also includes ten numerals and ten drawings.

ORDERING INFORMATION: Shipped unassembled. Fits all Sears routers and other brands with six inch base or less. Three-dimensional patterns not included. Instruction book.

9 GT 25187C—Shipping weight 6 pounds. \$29.99

Rout-A-Form Pantograph (not shown). Construction as above.

USES: Trace one-dimensional designs in wood.

ACCESSORIES: Includes 52 letters (26 each, upper and lower case), 10 numerals and 10 drawings. Instruction book.

ORDERING INFORMATION: Shipped unassembled. Fits all Sears routers and other brands.

9 GT 25183C—Shipping weight 4 pounds. \$12.99



Dust Collector Kit \$14.99

USES: Attaches directly to router to trap sawdust before it can spread throughout work area . . . helps reduce clean-up time. For effective pick-up, attach to your shop or home vac thru 1 1/4-in. diam. hose (not incl.).

CONSTRUCTION: High-impact plastic. Includes two attachments; one for use while edge routing, the other for use while surface routing and carving. Edge guide helps you direct router. Includes mounting hardware.

ORDERING INFORMATION: Fits all Sears routers except 9-1735.

Shpg. wt. 1 lb. 7 oz.
9 GT 25185 . . . Kit \$14.99



3-section Template Clamps plus Butt-hinge Template \$49.99

USES: You can use your router to mortise doors and jambs quickly and accurately. Three-section template clamps guide router for square or round-cornered hinges up to 5 inches long on 2 or 3 hinge doors up to 7 feet high. 3/4 to 2 1/2 inches thick. Butt-hinge template allows you to obtain accurate butt hinges time after time. Set of two, includes 3 1/2 and 4-in. single templates.

ORDER INFO: Use with guide bushings sold at right.

9 GT 2564C—Wt. 11 lbs. . . . Set \$49.99

(1) Butt-hinge Templates alone

As described above. Set of two.

ORDERING INFO: Use with guide bushings sold at right.

9 GT 2575—Wt. 1 lb. . . . Set \$5.99

Letter, Numeral Template Set \$12.99

Template Set with letters and numerals. Make professional-looking signs. Mortise figures 2 1/2 in. high. Quick-action release.

ACCESSORIES: With 52 letter plates. Mortise letters in 2 heights: 1 1/2 and 2 1/2 in. high. 26 letters, 10 numbers, 4 punctuation marks in each size.

ORDERING INFORMATION: Use with guide bushings (2) sold below.

9 GT 2573—Wt. 2 lbs. 15 oz. \$12.99

Stencil Set of 5 letter styles. Includes Oriental, modern, Old English, script and computer stencils. Can be used with 9 GT 25183 above or as replacements for 9 GT 25187.

9 GT 2518—Wt. 1 lb. 13 oz. \$7.99

Replacement plates for Template Set above. 40 plates.

9 GT 25184—Shpg. wt. 1 lb. 8 oz. \$5.99

(2) Guide Bushings. Three guides; 7/16, 3/8 and 1 1/16 in. Black-oxide coated steel.

9 GT 25069—Wt. 15 oz. \$5.89

YOU CAN DO IT



. . . with Craftsman Routers and Accessories. Take advantage of your router's versatility by adding the accessories sold on this page. Make attractive designs in cabinet doors with our Door and Panel Decorating Kit. Add our new three-dimensional Pantograph and you can carve beautiful designs for decorations and plaques that have a raised, realistic look. Or if you'd like, use the same Pantograph to carve signs in five different kinds of script. You'll be surprised at what you can do with your Craftsman Router and Accessories. All you need is a little know-how and you can do it!



(1) Dovetail
Joint Fixture

Helps you make strong dovetail joints

USES: Make $\frac{1}{2}$ -inch cuts for flush, rabbeted dovetail joints. Fixture holds both pieces to be joined for simultaneous cutting. Use on stock up to 12 inches wide, $\frac{3}{16}$ to $1\frac{1}{2}$ inches thick. Includes channel plate, comb and clamps.

ORDER INFO: Use with bushings, page 79; bit (29), page 81.
9 GT 2571—Shipping weight 6 pounds 5 ounces\$34.50

(2) Dovetail Joint Fixture as above, but for stock up to 8 inches wide, $\frac{1}{4}$ or $\frac{1}{2}$ inch thick. Bushings are included.

ORDERING INFO: Use with bit (29) sold on page 81.
9 GT 2576—Shipping weight 2 pounds 10 ounces\$24.99

$\frac{1}{4}$ -inch Finger Template. Adapts $\frac{1}{2}$ -inch joint fixture (9 GT 2571) above to make $\frac{1}{4}$ -inch dovetails.

ORDER INFO: Use with bit (28) sold on page 81.
9 GT 2574—Shipping weight 2 pounds 2 ounces\$8.89



(3) Bit Sharpening Kit

HOW IT WORKS: Attach to bottom of router. Router turns wheel to sharpen steel or carbide-tipped bits. Use with $\frac{1}{4}$ -in. diameter shank bits; fits all Sears routers except 9-1735.

ORDERING INFO: Wt. 1 lb. 12 oz.
9 GT 6650Kit \$24.50

(4) Laminate Trimmer

HOW IT WORKS: Attach to bottom of router. Micrometer-type adjustment; trim flush along edge for straight or 70° angle cut. Incl. $\frac{1}{4}$ -in. straight/bevel-cut carbide-tip bit. Fits all Sears routers except 9-1735.

ORDERING INFORMATION:
9 GT 25732—Wt. 1 lb.\$14.50

Extra $\frac{1}{4}$ -in. Bit for (4). Not shown. For plastic laminates. Carbide tip.

ORDERING INFORMATION:
9 GT 2541—Wt. 3 oz.\$4.99

(5) Edge Guide

HOW IT WORKS: Attach to router for straight cuts and parallel grooves. Butt guide along edge and direct router along workpiece. Fits all Sears routers except 9-1735.

ORDERING INFO: Wt. 1 lb. 11 oz.
9 GT 25172\$5.89

Edge Guide as above, but with contour finger... lets you follow curved edges. Shpg. wt. 2 lbs.
9 GT 25173\$7.89

(6) Trammel Point

HOW IT WORKS: Attach to your router to cut accurate circle grooves. Set radius on guide bars, place point in center, rotate router. Cuts circles 2 to 26 inches in diameter. Fits all Sears routers except 9-1735.

ORDERING INFO: Shpg. wt. 13 oz.
9 GT 25174\$5.89

(7) CRAFTSMAN® Face Shield


Helps protect from wood chips and other debris when using router or other portable electric tool. Clear polycarbonate; measures 8x11 $\frac{1}{2}$ inches. Adjustable head gear. Meets American National Standards Institute Z87.1, 1968 standards.

ORDERING INFORMATION: See complete line of safety equipment on pg. 57. Wt. 1 lb. 1 oz.
9 GT 18613Each \$6.99

Price for 3 or moreEach 6.29

Carbide-tipped Router Bits

Our finest bits last up to 15 times longer than steel bits on opposite page. We use silver alloy to braze extra-hard carbide tips onto Kromedge bits. This produces long wearing bits that are highly resistant to abrasion. All have $\frac{1}{4}$ -inch diameter shanks

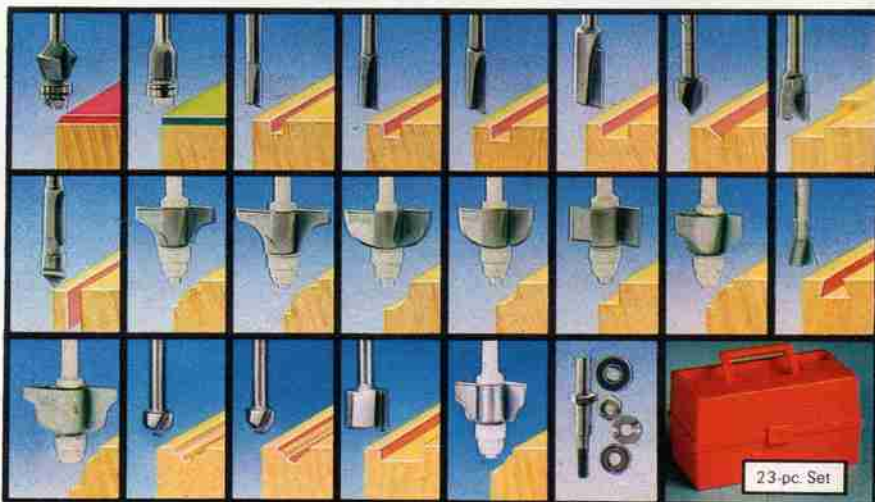


23-piece Carbide Bit Set incl. 21 bits, arbor and case \$179⁹⁹

SET COMPOSITION: $\frac{1}{2}$ -inch, 22° bevel veneer cutter bit; $\frac{1}{2}$ -inch straight veneer trimmer bit; $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$ -inch straight-face bits; $\frac{1}{2}$ -inch V-groove chamfering bit; $\frac{1}{2}$ -inch butt-hinge mortising bit; $\frac{3}{8}$ -inch combination panel cutter bit; $\frac{1}{2}$, $\frac{3}{8}$ -inch bead and quarter-round bits; $\frac{1}{2}$, $\frac{3}{8}$ -inch cove bits; rabbit bit; $\frac{1}{4}$ -inch bead quarter-round bit; $\frac{1}{2}$ -inch dovetail bit; $\frac{1}{4}$ -inch roman ogee bit; $\frac{1}{2}$ -inch ogee bit; $\frac{1}{2}$ -inch classic bit; $\frac{3}{4}$ -inch straight-face bit; $\frac{5}{32}$ -inch roman ogee bit; $\frac{1}{4}$ -inch arbor with two ball bearing pilots ($\frac{1}{2}$ and $\frac{3}{8}$ -in.); plastic bit case holds 44 bits.

ORDERING INFORMATION: Separate prices total \$220.05

9 GT 22116—Shipping weight 2 poundsSet \$179.99

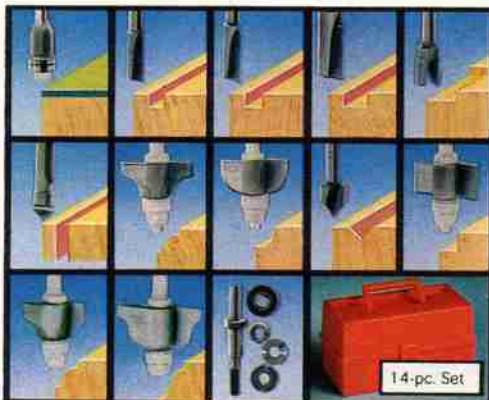

14-pc. Carbide Bit Set

Includes 12 bits, arbor and case \$99⁹⁹

SET COMP: $\frac{1}{2}$ -inch straight veneer trimmer; $\frac{5}{16}$, $\frac{3}{8}$, $\frac{1}{2}$ -inch straight-face bits; $\frac{1}{2}$ -in. butt-hinge mortising bit; $\frac{3}{8}$ -in. combination panel cutter bit; $\frac{3}{8}$ -in. bead and quarter-round bit; $\frac{3}{8}$ -in. cove bit; $\frac{1}{2}$ -inch V-groove chamfering bit; rabbit bit; $\frac{1}{4}$ -inch bead quarter-round bit; $\frac{1}{4}$ -inch roman ogee bit; $\frac{1}{4}$ -inch arbor with 2 ball bearing pilots ($\frac{1}{2}$ and $\frac{3}{8}$ -in.). Also includes plastic bit case... holds 44 bits.

ORDERING INFORMATION: Separate prices total \$120.16

Shipping weight 1 lb. 8 oz.
9 GT 22108Set \$99.99



(8 thru 29) Individual Carbide-tipped Router Bits

TYPES, SIZES AND ORDERING INFORMATION:

Item	Description	Size	Catalog No.	Wt.	Price
(8)	Bead and Quarter-round	$\frac{1}{2}$ -in.	9 GT 25565	3 oz.	\$12.49
(9)	Bead and Quarter-round	$\frac{1}{2}$ -in.	9 GT 25566	3 oz.	11.99
(10)	Cove and Chamfering	$\frac{1}{2}$ -in.	9 GT 25575	4 oz.	12.99
(11)	Cove and Chamfering	$\frac{3}{8}$ -in.	9 GT 25576	3 oz.	11.99
(12)	22° Bevel Veneer Cutter	$\frac{1}{2}$ -in.	9 GT 25412	3 oz.	9.49
(13)	Straight Veneer Trimmer	$\frac{1}{2}$ -in.	9 GT 25413	3 oz.	9.49
(14)	Rabbit	$\frac{1}{2}$ -in.	9 GT 25582	4 oz.	11.99
(15)	Combination Panel Cutter	$\frac{3}{8}$ -in.	9 GT 25541	3 oz.	4.99
(16)	Combination Formica Cutter	$\frac{1}{2}$ -in.	9 GT 2541	3 oz.	4.99
(17)	Butt-hinge Mortising	$\frac{1}{2}$ -in.	9 GT 25551	3 oz.	6.49
(18)	Straight-face	$\frac{1}{2}$ -in.	9 GT 25524	3 oz.	4.99
(19)	Straight-face	$\frac{1}{2}$ -in.	9 GT 25525	3 oz.	5.49
(20)	Straight-face	$\frac{1}{2}$ -in.	9 GT 25526	3 oz.	5.99
(21)	Straight-face	$\frac{1}{2}$ -in.	9 GT 25527	4 oz.	6.79
(22)	V-groove Chamfering	$\frac{1}{2}$ -in.	9 GT 25578	3 oz.	8.49
(23)	Bead and Quarter-round	$\frac{1}{2}$ -in.	9 GT 25503	4 oz.	11.99
(24)	Straight-face	$\frac{1}{2}$ -in.	9 GT 25506	4 oz.	11.99
(25)	Roman Ogee	$\frac{3}{32}$ -in.	9 GT 25507	5 oz.	12.99
(26)	Dovetail Cutter	$\frac{1}{2}$ -in.	9 GT 25505	3 oz.	8.99
(27)	Roman Ogee	$\frac{1}{4}$ -in.	9 GT 25504	3 oz.	11.99
(28)	Ogee	$\frac{1}{2}$ -in.	9 GT 25584	3 oz.	12.99
(29)	Classic Bit	$\frac{1}{2}$ -in.	9 GT 25595	3 oz.	12.99

(30) 3-piece Carbide Router Bit Set

Includes $\frac{3}{8}$ -inch combination panel cutter bit; $\frac{1}{2}$ -inch straight veneer trimmer bit; $\frac{1}{2}$ -inch, 22° bevel veneer cutter bit.


ORDERING INFORMATION:
Separate prices total \$23.97
Shipping weight 6 oz.
9 GT 22114Set \$19.99

(31) Arbor Set

$\frac{1}{4}$ inch. With two ball bearing pilots ($\frac{1}{2}$ and $\frac{3}{8}$ in.). Use with carbide-tipped bits (8, 9, 10, 11, 14 and 27).

ORDERING INFORMATION:
Shipping weight 3 oz.
9 GT 25895Set \$6.49

High-speed Kromedge® Router Bits Stay sharp up to 5 times longer than ordinary steel bits... precision-ground from fortified chrome-nickel-molybdenum steel. 1/4-in. diameter shanks

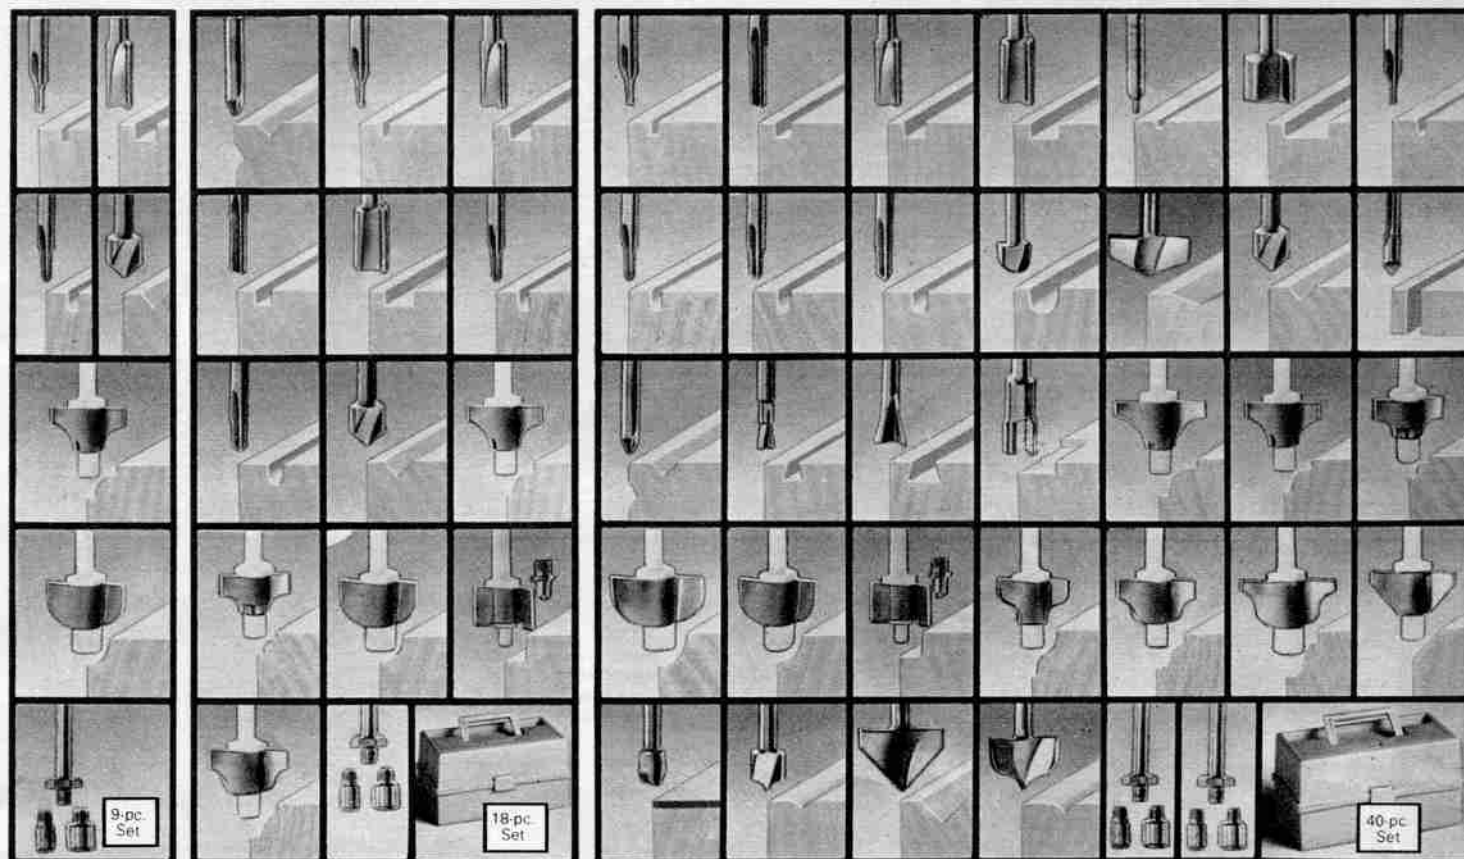

9-pc. Kromedge Bit Set

Includes 6 bits and 3-pc. arbor **\$19.99**

SET COMPOSITION: 1/8, 3/8-inch straight-face bits; 3/16-inch veining bit; 1/2-inch V-groove chamfering bit; 3/8-inch bead and quarter-round bit; 3/8-inch cove bit; 1/4-inch arbor with two pilots; 7/16 and 5/16-inch.

ORDERING INFORMATION:

Separate prices total \$20.24.

Shipping weight 7 ounces.

9 GT 21213 \$19.99

18-pc. Kromedge® Bit Set

Includes 13 bits, arbor, 3 pilots and case **\$49.99**

SET COMPOSITION: Double-end 45°/60° V-groove bit; 1/8, 3/8, 1/4, 1/2-inch straight bits; 3/16, 1/4-inch veining bits; 1/2-inch V-groove chamfering bit; 1/4, 3/8-inch bead and quarter-round bits; 3/8-inch cove bit; rabbit bit with pilot; 5/32-inch roman ogee bit; 1/4-inch arbor with two pilots, 7/16 and 5/16-inch. Also includes plastic bit case...

ORDERING INFO: Separate prices total \$59.05.

Shipping weight 2 pounds 2 ounces.

9 GT 21217 \$49.99

40-pc. Set... our largest Kromedge® Bit Set

Includes 33 bits, two 3-pc. arbors and case **\$119.99**

SET COMPOSITION: 1/8, 1/4, 3/8, 1/2, 3/4-inch straight-face bits; 1/8, 3/16, 7/32, 1/4-inch veining bits; 1/2-inch core box; panel raising bit; 1/2-inch V-groove chamfering bit; 1/4-inch combination panel cutter bit; double-end 45°/60° V-groove bit; 1/4, 1/2-inch dovetail bits; 1/2-inch butt-hinge mortising bit; 1/2, 3/8, 1/4-inch bead and quarter-round bits; 1/2, 3/8-inch cove bits; rabbit bit with pilot; 3/16-inch ogee bit; 5/32, 1/4-inch roman ogee bits; 45° chamfering bit; carbide formica bit; 3/16 point-cutting quarter-round bit; 7/8-inch V-groove chamfering bit; 5/32-inch point-cutting ogee bit; 2 arbors and 4 pilots; 2 pilots, 7/16, two pilots 5/16-in. Plastic bit case holds 44 bits.

ORDERING INFORMATION: Separate prices total \$150.65.

9 GT 21221—Shipping weight 2 pounds 3 ounces \$119.99

Individual Kromedge® Router Bits

TYPES, SIZES AND ORDERING INFORMATION:

Item	Description	Size	Catalog No.	Wt.	Price
(1)	Straight-face	1/16 in.	9 GT 25528	3 oz.	\$1.79
(2)	Straight-face	1/4 in.	9 GT 25521	3 oz.	2.19
(3)	Straight-face	3/8 in.	9 GT 25522	3 oz.	2.89
(4)	Straight-face	1/2 in.	9 GT 25523	3 oz.	3.39
(5)	Straight-face	3/4 in.	9 GT 25529	3 oz.	5.49
(6)	Straight-face	1 1/8 in.	9 GT 2552	3 oz.	1.99
(7)	V-groove Chamfering	1/2 in.	9 GT 2557	3 oz.	4.79
(8)	V-groove Chamfering	3/8 in.	9 GT 25579	3 oz.	6.29
(9)	Veining	1/8 in.	9 GT 2559	2 oz.	2.49
(10)	Veining	3/16 in.	9 GT 25592	3 oz.	2.69
(11)	Veining	1/32 in.	9 GT 25593	3 oz.	2.89
(12)	Veining	1/4 in.	9 GT 25594	3 oz.	3.19
(13)	Cove	3/8 in.	9 GT 25572	3 oz.	4.49
(14)	Cove	1/2 in.	9 GT 25571	3 oz.	4.79
(15)	45° Chamfering	1/2 in.	9 GT 25589	3 oz.	4.79
(16)	Double-end 45°/60° V-groove	1/2 in.	9 GT 25545	3 oz.	3.49
(17)	Double-end straight/veining	1/16 in.	9 GT 25599	3 oz.	4.49
(18)	Core Box	1/2 in.	9 GT 25596	3 oz.	3.79
(19)	Rabbit with pilot	1/2 in.	9 GT 25581	3 oz.	5.79
(20)	Ogee	3/16 in.	9 GT 25585	3 oz.	5.59
(21)	Roman Ogee	5/32 in.	9 GT 25587	3 oz.	5.79
(22)	Roman Ogee	1/4 in.	9 GT 25588	3 oz.	6.79
(23)	Point Cutting Ogee	5/32 in.	9 GT 25583	3 oz.	6.99
(24)	Bead and Quarter-round	1/4 in.	9 GT 25583	3 oz.	4.49
(25)	Bead and Quarter-round	3/8 in.	9 GT 25582	3 oz.	4.89
(26)	Bead and Quarter-round	1/2 in.	9 GT 25581	3 oz.	5.29
(27)	Point Cutting Quarter-round	3/16 in.	9 GT 25567	3 oz.	4.49
(28)	Dovetail Cutter	1/4 in.	9 GT 2553	3 oz.	4.49
(29)	Dovetail Cutter	1/2 in.	9 GT 25531	3 oz.	4.79
(30)	Combination Panel Cutter	1/4 in.	9 GT 2554	3 oz.	3.19
(31)	Butt-hinge Mortising	1/2 in.	9 GT 2555	3 oz.	3.19
(32)	Panel Raising Bit	1/2 in.	9 GT 2568	3 oz.	6.49

†Cuts 1/4, 3/16, 1/8-in. rabbets, 1/16-in. surface cuts

*Use with Router-Crafter sold on page 82.

§Use with Dovetail Fixtures sold on page 80.

*Use with Butt-hinge Template sold on page 79.

(33) 3-pc. Ball-bearing Arbor Set. 1/4-in. 7/16-in. ball bearing pilot, 5/16-in. solid-type pilot. Use with (13, 14, 15, 19, 20, 21, 22, 24, 25, 26) at left.

ORDER INFO: Wt. 3 oz.

9 GT 25601 \$4.49

(34) 3-pc. Arbor Set. 1/4-in. Two solid-type pilots, 7/16 and 5/16-in. (33) for bits requiring arbor.

ORDER INFO: Wt. 3 oz.

9 GT 2589 \$2.99

(35) Bit Case. Plastic. Holds 44 bits.

ORDER INFO: Wt. 14 oz.

9 GT 2558 \$5.99

Router Case (not shown). Permanex polyethylene. Slides in lid hold bits. 12 1/2 x 10 1/2 x 7 1/4 in.

ORDERING INFO:

Shp. wt. 3 lbs. 14 oz.

9 GT 1465 \$12.89

(36) CRAFTSMAN Portable Electric Tool Handbook.

Instructions on use of routers, etc. 175 pgs.

ORDER INFO: Wt. 15 oz.

9 GT 2949 \$5.99



Only at Sears...

CRAFTSMAN® Router-Crafter

Turn your router into a tool that performs the precision woodworkings of a lathe... without the need for chisels or intricate measuring

HOW IT WORKS:

- Mount workpiece (up to 3 in. square, 36 in. long) between headstock and tailstock
- Attach router to sliding platform... fits routers with 1/4-in. shank bits
- Set dial for uniform spacing... lets you turn out duplicates
- Crank handle to move router

\$59⁹⁹
without
router, bits

Drive Adapter for Router-Crafter allows cuts to be made over full length of workpiece

\$9⁹⁹

11-pc. Bit Set
\$34⁹⁹

(1) CONSTRUCTION: Die-cast aluminum headstock, tailstock, platform. Chrome-plated steel tubes and crank. Steel cable. Includes screws for mounting router and instructions. 45x8 1/2 x 7 inches high.

ORDER INFO: Router not incl. Order bit below.
9 GT 2525C—Shipping weight 12 pounds... \$59.99

(2) Drive Adapter for Router-Crafter Comes complete with spindle and removable drive center for locating workpiece. Allows cuts over full length of workpiece. Interchangeable with original equipment spindle.
9 GT 2525B—Shipping weight 1 lb. 1 oz. \$9.99

(3) 11-piece Kromedge Router-Crafter Bit Set Designed especially for Router-Crafter above.
CONSTR: Bits precision-ground from high-speed steel, chrome-plated to resist rust. 1/4-in. shanks.
SET COMPOSITION: 7/8-in. V-groove; 1/4-in. veining; 1/2-in. core box; rabbet with pilot for 1/4, 5/16, 3/8 in. rabbets, 15/16-in. surface cuts; 5/32-in. point-cutting ogee; 3/16-in. point cutting quarter-round; panel raising bit; 3-piece arbor set.
ORDERING INFORMATION:
9 GT 21227—Shipping weight 8 oz. ...Set \$34.99

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

New at Sears... Deluxe Router Table

Cast-reinforcing ribs under top prevent sagging, provide sturdy work surface

Built-in adjustable pilot lets you guide workpiece smoothly for making intricate curves

Miter gauge lets you guide workpiece thru bit or blade at exact angle you set

Unitized fence lets you change work position quickly, easily... adjust only one knob

New Sawdust pickup system hooks up to home or shop-vac

\$49⁹⁹
Router
not included

Our exclusive design includes die-cast aluminum top that makes this table stronger than ordinary table with stamped steel top.

USES: Holds router for edging and cutting operations. Tool mounts easily from below.

MITER GAUGE: Lets you guide workpiece over bit or blade at the exact angle you set. Guided by 3/4-inch slot on table top.

GUARD: Transparent, hinged. Covers moving bit, rides over moving stock.

CONSTRUCTION: Heavy-duty, die-cast aluminum top mounted on stamped steel legs. Cast-reinforcing ribs under top. New sawdust pickup system hooks up to home or shop vac to help keep work surface clean. Unitized fence lets you change work positions quickly... adjust only one knob. Built-in adjustable pilot lets you guide workpiece smoothly. Die-cast fences have holes for attaching wood fences (included). 13 1/4 x 18 x 11 inches high.

ORDERING INFO: Router not incl. Unassembled.
9 GT 25443—Shpg. wt. 12 lbs. 2 oz. \$49.99



Dust Collector Kit for router tables

\$9⁹⁹

CONSTR: High-impact plastic. Dust deflector covers bit to direct dust back into collection bin. Mounting hardware incl.
ORDER INFO: Fits all Sears and most other brands. Wt. 1 lb. 1 oz.
9 GT 25186... \$9.99

(4) Heavy-duty Router-Sabre Saw Table **\$39⁹⁹**


CONSTRUCTION: Heavy-duty, die cast aluminum top mounted on stamped steel legs. Cast-reinforced ribs under top. Ridges on top collect sawdust to avoid caking under workpiece. Fence positions adjust quickly by simply loosening wingnuts. Metal fences have holes for attaching wood fences (included). Legs have holes for mounting to workbench. Miter gauge, hinged guard. 13 1/4 x 18 x 11 in.

ORDERING INFORMATION: Router, saw not included. Unassembled.
9 GT 25444—Shpg. wt. 11 lbs. 2 oz. ... \$39.99

(5) Steel Router Table **\$16⁹⁹**


CONSTRUCTION: Steel top, legs and fixed position fences. Metal fences have holes for attaching wood fences (not included). Legs have holes for mounting to workbench. Measures 18 x 13 1/2 x 11-in. high.


ORDER INFO: Router not incl. Unassembled.
9 GT 25446—Shpg. wt. 8 lbs. 2 oz. ... \$16.99

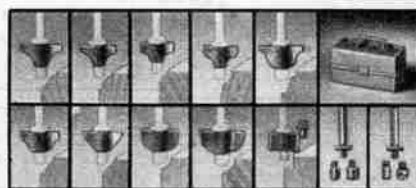

18-pc. Kromedge® Decorative Cut Router Bit Set **\$54⁹⁹**

CONSTR: High-speed steel, 1/4-inch shanks.
SET INCL: 3/16-in. Ogee, 1/4, 5/32-in. Roman ogee; 45° chamfering; 3/8, 1/2-in. cove bits; 1/4, 3/8, 1/2-in. bead and quarter-round; 3-pc. arbor set with 7/16 (ball-bearing) and 5/16 in. (solid-type) pilots; 3-pc. arbor set with 5/16 and 7/16-in. solid type pilots; rabbet with pilot for 1/4, 5/16, 3/8-in. rabbets, 15/16-in. surface cuts; plastic case.
9 GT 21223—Wt. 2 lbs. 2 oz. Set \$54.99

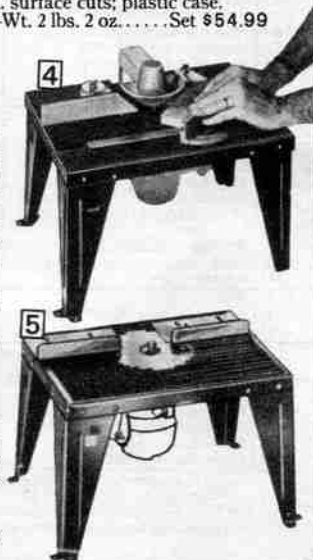

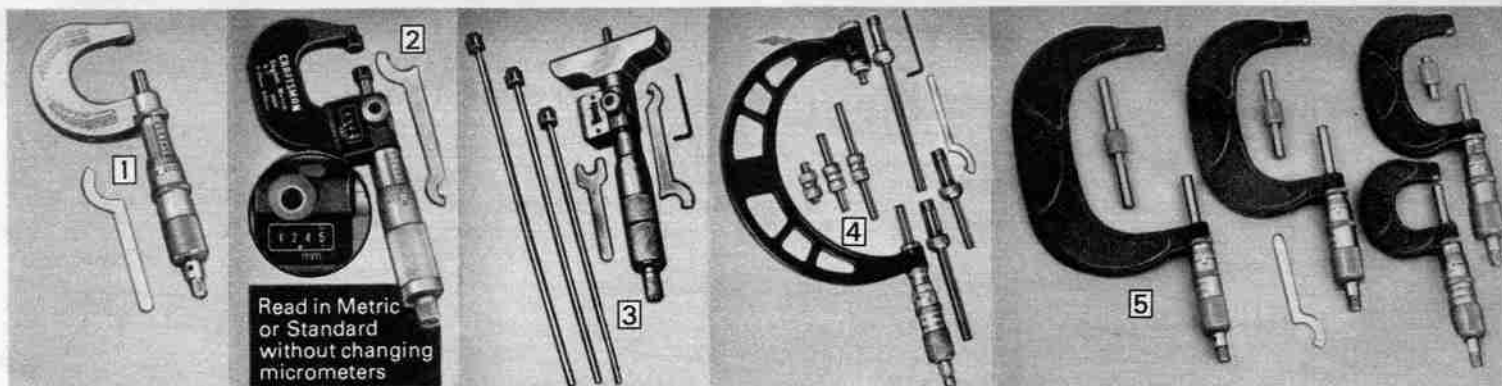

(1) Fixed Anvil Micrometer

CONSTR: Forged steel head, frame. Threads ground, polished. Carbide-tipped anvil and spindle. Graduated to .0001 in. Decimal equivalents etched on frame. Plastic pouch included.

CAPACITIES. ORDERING INFORMATION: See warranty below, right.
9GT38662—0 to 1 in. Wt. 9 oz. \$34.49
9GT38665—1 to 2 in. Wt. 12 oz. 42.49

Graduated to .001 in. (not shown). Measures 0 to 1 in. Ideal for apprentices. Case not included.

ORDERING INFORMATION:

Not Craftsman.
9 GT 40701—Shpg. wt. 8 oz. \$10.69

(2) Metric/Standard Micrometer—our finest. Reads millimeters and in. simultaneously for easy conversions.

CONSTR: Clearly-marked graduations on satin-chrome finished cast steel. Carbide-tipped. With lock, speeder, heat insulators, fitted case. Imported.

CAPACITY: Direct readings on digital counter to .01 mm. Standard vernier scale to .0001 in. Size 0 to 1 inch.

ORDER INFO: See warranty, right.

9 GT 38666—Wt. 1 lb. 6 oz. \$55.99

As above, but reads in inches only

9 GT 38644—Wt. 1 lb. 3 oz. \$46.99

(3) Digit Depth Micrometer

Digital counter for clear, accurate readings. . . . measures 0 to 4 inches by .001 inch.

CONSTRUCTION: 2½-in. base micro-lapped for accuracy. Base, thimble satin-chrome plated. Friction thimble for constant pressure. Positive locking clamp. Conventional sleeve thimble provided to double check digital counter. Incl. 4 rods, fitted case.

ORDER INFO: Warranty below. Imported. Wt. 2 lbs. 2 oz.
9GT38645 \$64.99

(4) Mandrel Micrometer.

Four interchangeable mandrels let this tool do the work of four fixed anvil micrometers. 0 to 4 in. by .001 in.

CONSTRUCTION: Steel frame. Satin-chrome plated head, easy-to-read scale.

ACCESSORIES: Includes 3 checking standards, wrench and storage case.

ORD. INFO: See warranty at right. Shpg. wt. 2 lbs. 8 oz.

9GT38607 \$81.99

(5) Ground-thread Micrometers

CONSTR: Steel, cast steel with polished spindle, anvil. Ground thread. Spindle hardened to Rc 62-64, lead error held to .00005 in. Spindle lock. Black frame. Standard scales marked to .001 in., metric scales to .01 mm. Meet federal standards for accuracy.

ACCESSORIES: Sets include case. See chart for number of checking standards.

RANGE AND ORDERING INFORMATION: See warranty below.

Catalog Number	Pieces	Range	No. of Standards	Wt. lbs. oz.	Price
9GT38601	1	0-1 in.	0	9	\$27.49
9GT38602	1	1-2 in.	1	12	36.99
9GT38603	1	2-3 in.	1	14	41.99
9GT38604	1	3-4 in.	1	4	47.99
9GT38605	1	4-5 in.	1	6	53.49
9GT38606	1	5-6 in.	1	13	58.49
9GT38607	1	0-4 in.	3	4	147.99
9GT38608	6	0-6 in.	5	9	259.99
9GT38621	1	0-25mm	0	8	27.49
9GT38622	1	25-50mm	1	10	36.99

Rolled-thread Micrometers (not shown).


Like (5) at left but with rolled thread. Spindle hardened to Rc 58-62 with lead error held to .0003 inch. Gray frame.

ACCESSORIES: Sets incl. case. See chart below for number of checking standards.

RANGE. ORD INFO: Warranty below.

Catalog Number	Pieces	Range	No. of Standards	Wt. lbs. oz.	Price
9GT38711	1	0-1 in.	0	8	\$22.49
9GT38712	1	1-2 in.	1	10	29.49
9GT38713	1	2-3 in.	1	12	33.49
9GT38714	1	3-4 in.	1	14	37.49
9GT38715	1	4-5 in.	1	10	43.49
9GT38716	1	5-6 in.	1	2	44.99
9GT38717	4	0-4 in.	3	4	116.99
9GT38718	6	0-6 in.	5	9	189.99
9GT38721	1	0-25 mm	0	8	22.49
9GT38722	1	25-50 mm	1	10	29.49
9GT38723	1	50-75 mm	1	12	33.49
9GT38724	1	75-100 mm	1	14	37.49
9GT38725	1	100-125 mm	1	10	43.49
9GT38726	1	125-150 mm	1	2	44.99
9GT38727	4	0-100 mm	3	4	116.99
9GT38728	6	0-150 mm	5	9	189.99

FULL ONE YEAR WARRANTY ON CRAFTSMAN® PRECISION TOOLS AND ELECTRIC HEATERS. If within one year from the date of purchase, any Craftsman Precision Tool fails due to a defect in material or workmanship, Sears will repair it free of charge. Warranty service is available by simply returning the Precision Tool to the nearest Sears store throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

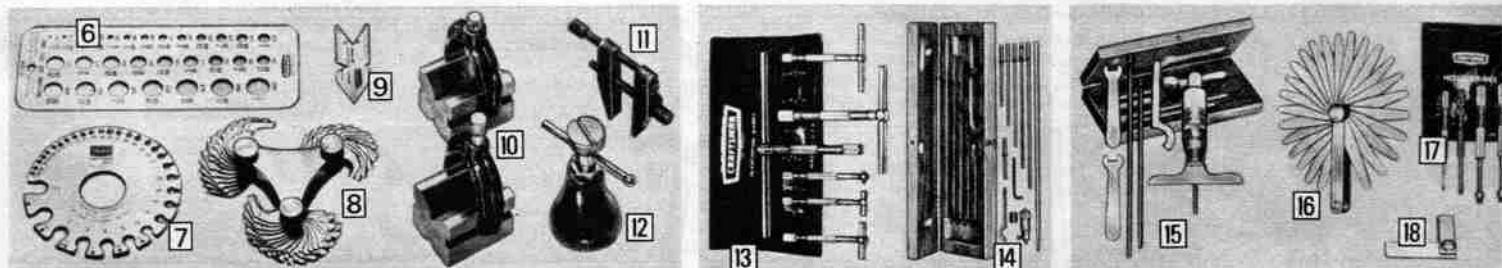

CRAFTSMAN® Gauges, Clamp Sets and Jack Screw

(6) Drill Gauge. Polished steel.

Measures 29 fractional sizes from 1/16 to 1/2 inch.

ORDER INFO: Warranty, above.

9 GT 4049—Wt. 5 oz. \$4.40

Drill and Wire Gauge (not shown). Polished, hardened steel.

Sizes 1 to 60. Index for taps.

ORDER INFO: Warranty, above.

9 GT 4047—Wt. 5 oz. \$4.40

(7) Circular Gauge. Steel.

Measures wire, sheet, plate sizes 0 to 36. American Standard for non-ferrous metals.

ORDER INFO: Warranty, above.

9 GT 4023—Wt. 6 oz. \$8.85

(8) V-thread Gauge. Knurled, hardened and rolled steel.

Pitches 4 to 84. Imported.

ORDER INFO: Warranty, above.

9 GT 4031—Wt. 5 oz. \$15.50

(9) Lathe Center Gauge

Stainless steel. U.S. Standard 60°. Graduations at 14th, 20th, 24th, 32nd of an inch.

ORDER INFO: Warranty, above.

Shipping weight 2 ounces.

9 GT 40642 \$3.40

(10) 4-piece V-block and Clamp Set.

Hardened tool steel V-blocks are precision ground for both square and parallel accuracy. V-blocks measure 1½x1½x1¼ inches. Clamps hold 1-inch round or irregular work material. Set includes 2 V-blocks, 2 clamps.

ORDERING INFO: See warranty above. Shpg. wt. 2 lbs. 2 oz.

9 GT 4083 Set \$24.50

(11) Toolmaker's Clamp.

Parallel, case-hardened steel jaws 2½ inches long. Spring clip. Jaws open to 1 inch.

ORDERING INFO: Not Craftsman.

9 GT 4481—Wt. 5 oz. \$1.69

Toolmaker's Clamp as above but with 4-inch long jaws.

Opens to 2 inches. Shpg. wt. 12 oz.

9 GT 4486 \$2.49

(12) Jack Screw.

Lifts 1000 pounds. Adjusts to 1 inch. Measures 3 inches high when closed, 4 inches high fully extended.

ORDERING INFO: Not Craftsman.

Shipping weight 8 ounces.

9 GT 4088 \$2.90

CRAFTSMAN® Specialty Gauge Sets and Squares

(13) Telescopic Gauge Sets

CONSTRUCTION: High grade tool steel. Head ends heat-treated for toughness. Plunger telescopes, locks with knurled screw.

CAPACITY. ORDERING INFO: See warranty, above.

6-gauge Set—3/16 to 6 in.

9 GT 4027—Wt. 14 oz. Set \$48.99

4-gauge Set—3/16 to 2½ in.

Shipping weight 6 ounces.

9 GT 40203 Set \$29.80

(14) Inside Micrometer Sets

CONSTRUCTION: Chrome-plated heads. Heads and mandrels ground, hardened for accuracy. With setting and extension handles; case included.

CAPACITIES: See ranges below. Standard scales read to .001 in., metric to .01 millimeters.

RANGE. ORDERING INFORMATION: See warranty, above.

Standard—1½ to 8½ inches.

9 GT 3864—Wt. 1 lb. 4 oz. Set \$52.49

Standard—1½ to 12½ inches.

9 GT 38641—Wt. 1 lb. 14 oz. Set \$62.99

Metric 38 to 213 millimeters.

9 GT 38642—Wt. 1 lb. 10 oz. Set \$51.99

(15) Depth Gauge Sets

CONSTR: Tool steel; screw stock extensions. Ends hardened, precision ground, lapped. Adjusting nut compensates for wear. Interchangeable rods held by knurled cap. Case, lock incl.

CAPACITIES. ORDER INFO: See warranty above.

Size Catalog No. Shpg. wt. Set

0 to 3 in. x .001 in. 9 GT 3863 1 lb. 2 oz. \$48.49

0 to 6 in. x .001 in. 9 GT 38632 2 lbs. 58.49

0 to 75 mm. x .01 mm. 9 GT 38623 1 lb. 4 oz. 48.49

(16) Taper Leaf Gauge.

26 leaves taper to ¼ inch from .0015 to .025 inches thick. Steel.

ORDERING INFO: See warranty above.

9 GT 4094—Shipping weight 6 ounces \$7.80

(17) 4-piece Small-hole Gauge Set.

Oil hardened tool steel. Range: 1/8-1/2 in. Plastic pouch.

ORDERING INFO: See warranty above.

9 GT 4056—Shipping weight 5 ounces Set \$29.50

(18) Steel squares.

Hardened, ground. Beam, blade pinned solidly. Not scaled. Imported.

ORDERING INFO: See warranty above.


Catalog No. Blade Beam Shpg. wt. Each

9 GT 40401 2½ in. 1½ in. 5 oz. \$8.75

9 GT 40402 3½ in. 2½ in. 6 oz. 9.50

9 GT 40403 4 in. 3 in. 8 oz. 10.50

9 GT 40404 6 in. 3½ in. 14 oz. 11.50

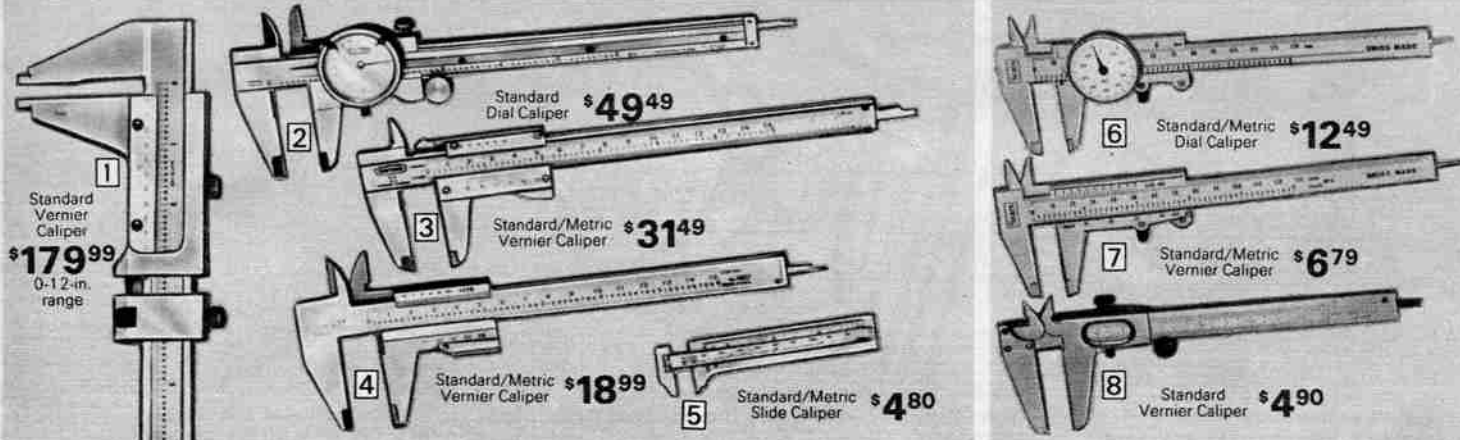

CRAFTSMAN® Dial and Vernier Calipers

(1) Standard and Standard/Metric Vernier Calipers

CONST: Tool steel, dulled chrome finish. Hardened adjustable jaws ground, precision lapped. Adjustable buffer plate for uniform jaw tension. Zero adjustment. Recessed beams read from inside or outside. Points on beams and slides for setting dividers. Nibs 0.3 in. wide with jaws closed. Meet or exceed Federal Specs. GGG-c111b for accuracy. CAPACITIES: Standard scales graduated to .001 in., metric scales to .05 mm.

ORDERING INFORMATION: See warranty below. Allow extra time for shipment from factory in St. James, Minn. Pay shipping and handling charges from your Distribution Center. No C.O.D. orders.

Range	Length of Jaws (in.)	Catalog Number	Wt. lbs.	Price
Standard	Metric			
0-12 in.	2 1/4	F9 GT 40231	4	\$179.99
0-24 in.	2 3/4	F9 GT 40232	8	269.99
0-12 in.	0-300 mm	F9 GT 40233	4	179.99
0-24 in.	0-600 mm	F9 GT 40234	8	269.99
0-36 in.	0-900 mm	F9 GT 40235	13	529.99

(2) Standard and Metric Dial Calipers

CONSTRUCTION: Stainless steel with chrome-plated scales on beam. Scales read from inside or outside. Depth rod. Adjustable bezel. 9 1/4 inches long. With storage case. Imported.

CAPACITIES, ORDER INFO: See warranty below.

Standard scale: 0 to 6 in. graduated to .001 in.

9 GT 40172—Shpg. wt. 1 lb. 4 oz. \$49.49

Metric Scale: 0 to 150 mm graduated to .05 mm.

9 GT 38668—Shpg. wt. 1 lb. 4 oz. \$49.49

(3) Standard/Metric Vernier Caliper with 6-inch/150mm range

CONSTR: Stainless steel with chrome-plated scales on recessed beam. Depth rod. Cam lock. 8 in. long. With storage case. Imported. CAPACITIES: Standard scale, 0 to 6 in. by .001 in.; metric 0 to 150 mm by .05 mm. ORDERING INFO: See warranty below.

With adjustable vernier plates

9 GT 40182—Weight 11 oz. \$31.49

Without adjustable plates

9 GT 40181—Shpg. wt. 11 oz. \$26.49

(4) Standard/Metric Vernier Caliper with 5.3-inch/130mm range

CONSTRUCTION: Stainless steel, polished scales on beam. Reads from inside, outside. Precision ground measuring faces. Depth rod. Automatic thumb lock. 8 3/8 inches long. With storage case. Imported.

CAPACITIES: Standard, metric scales, 0 to 5 1/2 in. by .001 in.; 0 to 130 mm by .05 mm.

ORDERING INFO: See warranty below.

9 GT 40257—Shpg. wt. 8 oz. \$18.99

(5) Standard/Metric Slide Caliper

CONSTRUCTION: Stainless steel. 4 1/2 in. long. CAPACITIES: Inside scale reads to 2 1/16 inches, outside to 2 7/8 inches. Marked in 32nds of an inch and 0.5 mm. Decimal equivalents on back.

ORDERING INFO: See warranty below.

9 GT 4025—Shpg. wt. 4 oz. \$4.80

Sears Dial, Vernier Calipers

(6 and 7) Standard/Metric Dial, Vernier Calipers

Imported. 8 3/8 inches long.

CONSTR: Nylon asbestos-reinforced polyamide plastic. Scales read inside, outside. Depth rod. Thumb roller.

(6) Dial Caliper. With zero adjustment, case.

CAPACITIES: Standard, metric scales from 0 to 5 in. by .001 in. and 0 to 130 mm by .1 mm.

ORDERING INFORMATION:

9 GT 40224—Wt. 8 oz. \$12.49

(7) Vernier Caliper

CAP: Stand., metric scales from 0 to 5 in. by .001 in., 0 to 130 mm by .05 mm.

ORDERING INFORMATION:

9 GT 40226—Wt. 6 oz. \$6.79

(8) Standard, Standard/Metric Vernier Calipers

CONSTRUCTION: Polished steel. Roller adjustment. Scales read from inside or outside. Depth rod. 7 3/8 in. long.


CAPACITIES, ORDERING INFO:

Standard scale: 0 to 5 in. by 16ths, 32nds in. Vernier reads in 128th in.

9 GT 4022—Wt. 7 oz. \$4.90

Standard/Metric Scale: 0 to 5 in. by 16th in., 0 to 140 mm by 1 mm. Vernier reads in 128th in., 0.1 mm.

9 GT 40222—Wt. 6 oz. \$4.90

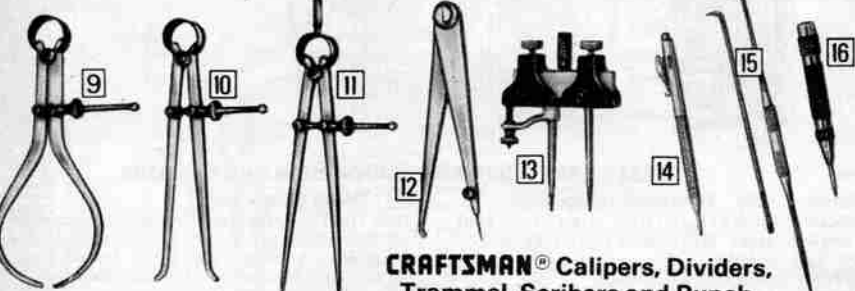

CRAFTSMAN® Calipers, Dividers, Trammel, Scribers and Punch

(9 thru 11) Flat Leg Calipers and Dividers

CONSTRUCTION: High quality tool steel legs machined to uniform length and balance. Adjustable.

TYPES, SIZES, ORDERING INFO: See warranty at right.

Item	Catalog No.	Size	Wt.	Price
(9) Outside Calipers	9 GT 38598	4-in.	4 oz.	\$5.85
	9 GT 38599	6-in.	6 oz.	6.85
(10) Inside Calipers	9 GT 38593	4-in.	4 oz.	5.85
	9 GT 38597	6-in.	6 oz.	6.85
(11) Dividers	9 GT 38591	4-in.	4 oz.	5.85
	9 GT 38592	6-in.	6 oz.	6.85

(12) Hermaphrodite Caliper

CONSTR: High quality tool steel. Legs machined to uniform length and balance. Adjustable tension. 6 in. long.

ORDER INFO: See warranty at right.

9 GT 38537—Wt. 5 oz. \$7.85

(13) Adjustable Trammel Points

Use to measure distances that are too great for ordinary dividers.

CONSTRUCTION: Steel. 3-inch points. With fine adjusting screw.

ORDERING INFO: See warranty at right.

Shpg. wt. 9 oz.

9 GT 4061 \$13.50

(14) Single Point Scriber

CONSTRUCTION: Aluminum body with reversible tungsten carbide steel tip. With magnetic end.

ORDERING INFO: See warranty at right.

Shpg. wt. 3 oz.

9 GT 4078 \$2.90

(15) Double Point Scriber

CONSTRUCTION: Steel. Knurled sleeve. 1 straight, 2 curved tempered points are replaceable and interchangeable. 9 in. long with short point; 12 in. long with long point.

ORDERING INFO: See Warranty at right.

Shipping weight 4 oz.

9 GT 4014 \$2.15

(16) Center Punch

CONSTRUCTION: Knurled steel body. Alloy steel point. 5 inches long. 1/2-inch diameter.

ORDER INFO: Warranty at right.

Shipping weight 5 oz.

9 GT 40541 \$6.75

CRAFTSMAN® Machinists Combination Square \$44.99



Check 45 and 90° angles. Use as depth or height gauge.

CAPACITY: 6-in. or 12-in. scale. Non-reversible bevel protractor graduated 180° left and right. Level vial in square head. Meets Federal Specifications GGG-S-656a for accuracy.

CONSTRUCTION: Hardened ground steel scale, machine divided for accuracy. Cast-iron, precision ground protractor, square head and center head.

ORDERING INFORMATION: See warranty below.

Scale length	Graduations		Catalog Number	Wt. lbs. oz.	Price
	Front	Back			
Square with protractor and center head					
12 in.	8ths, 16ths in.	32nds, 64ths in.	9 GT 38694	1 8	\$44.99
12 in.	32nds, 64ths in.	1 mm., 0.5 mm.	9 GT 38643	2 8	44.99
12 in.	32nds, 64ths in.	50ths, 100ths in.	9 GT 38695	1 8	44.99
Square without protractor, with center head (not shown)					
12 in.	8ths, 16ths in.	32nds, 64ths in.	9 GT 38693	1 8	\$26.49
Square without protractor or center head (not shown)					
6 in.	8ths, 16ths in.	32nds, 64ths in.	9 GT 3869	1 3	\$18.49
12 in.	8ths, 16ths in.	32nds, 64ths in.	9 GT 38691	1 6	21.49

FULL ONE YEAR WARRANTY ON CEILING FANS AND CRAFTSMAN PRECISION TOOLS: If, within one year from the date of purchase, any ceiling fan or Craftsman Precision Tool fails due to defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the ceiling fan or Precision Tool to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CRAFTSMAN® Center Finder Set, Edge Finder and Indicator Holders



(17) 4-piece Center Finder Set

CONSTR: Tool steel. Interchangeable offset, needle, disc and ball points clamp into shank with ball and swivel-point action. . . . adjusts to angular or concentric position. Adjustable chuck tension. 4 1/2 in. long. Case incl.

ORDERING INFORMATION: See warranty on opposite page.
9 GT 4004—Wt. 5 oz.\$9.85

(18) 1/2-in. Single Edge Finder

Hardened steel surfaces. . . . centerless ground to precision tolerance.

ORDERING INFORMATION: See warranty on opposite page.
9 GT 38819—Wt. 4 oz.\$4.40

(19) 50-lb. Pull Magnetic Base Indicator Holder

Holds most dial indicators with 1/4-inch holder bar.

CONSTRUCTION: Steel. 50-lb. pull magnet with quick-release lever. 3 1/2 x 1 1/4 x 2 1/2 inches high, 6 inches high overall.

ORDERING INFORMATION: See warranty on opposite page.
9 GT 3872—Wt. 15 oz.\$11.85

(20) 60-lb. pull Magnetic Base Indicator Holder

CONSTR: Steel. 60-lb. pull magnet with quick-release lever. Fine adjustment screw. 3 1/2 x 2 1/2 inches high, 12 inches high overall.


ORDER INFO: See warranty, opposite pg. Wt. 1 lb. 8 oz.
9 GT 38911\$15.85

(21) 100-lb. pull Magnetic Base Indicator Holder

Holds most dial indicators; center-lug, universal or plunger back.

CONSTR: Steel. 100-lb. pull magnet with on/off switch. Fine adjustment allows settings to within .0001 in. 1 7/8 x 1 1/4 x 2 1/4 in. high, 9 in. high overall. Imported.

ORDER INFO: See warranty, opposite pg. Wt. 4 lbs. 7 oz.
9 GT 38908\$29.49

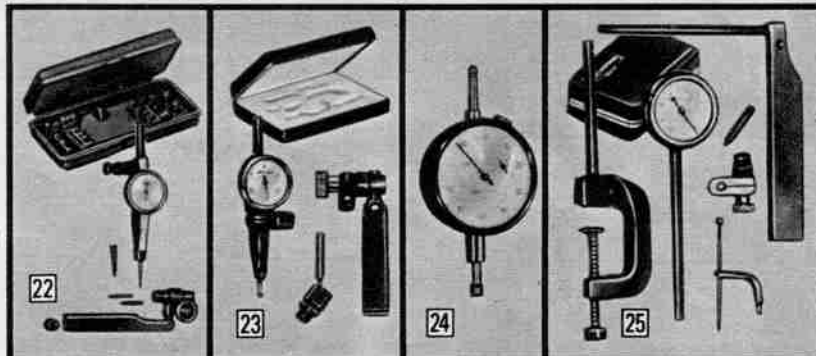

CRAFTSMAN® Dial Indicators

(22) 0-10-0 Universal Test Indicator Set

CAPACITY: Dial reads 0 to 10 to 0 by .0005 inch. Range of .0200 inch. Meets Federal Specifications Mil-1-18422D for accuracy. Imported.

ACCESSORIES: With 3 contact points, 2 stems (1/4 and 3/8-inch), wrench, universal holder and clamp with dovetail slots. Automatic reversal contact point.

ORDER INFO: Warranty, opposite page.
9 GT 40755—Wt. 1 lb. 2 oz.Set \$44.49

(23) 0-15-0 Universal Test Indicator Set

CAPACITY: Dial reads 0 to 15 to 0 by .001 inch. Range of .030 inch. Meets Fed. Specs. Mil-1-18422D for accuracy.

ACCESSORIES: Universal holder bar, clamp, case.

ORDER INFO: Warranty, opposite page.
9 GT 40761—Wt. 13 oz.Set \$34.40

(24) 0-100 Dial Indicator

CAPACITY: Dial reads 0 to 100 by .001 inch. Range of 1.000 inch. Hard brass bearings for long life. Detachable steel point. Dial diameter is 2 1/2 inches. Meets Federal Specifications Mil-1-18422D for accuracy. Imported.

ORDERING INFO: See warranty on opposite page.
9 GT 38683—Shpg. wt. 11 oz.\$32.49


(25) 0-50-0 Dial Indicator Set

CAPACITY: Dial reads 0 to 50 to 0 by .001 inch. Marked "+" and "-" for reading deviations. Range of .200 inch (two revolutions). Plunger-back gauge, 1 1/2-inch diameter. Meets Federal Specification Mil-1-18422D for accuracy.

ACCESSORIES: With universal clamp, tool post holder, C-clamp, hole lever attachment. 3 contact points and storage case also included.

ORDER INFO: See warranty on opposite page.
9 GT 3866—Shpg. wt. 1 lb. 13 oz.Set \$39.50

Dial Indicator alone.
9 GT 3867—Shpg. wt. 10 oz.\$22.50

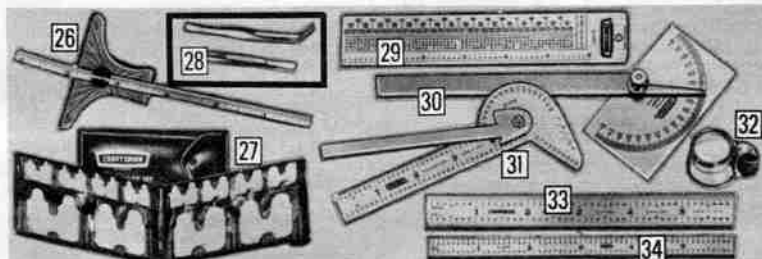

CRAFTSMAN® Gauges, Protractors and Rulers

(26) Depth Gauge

Hardened steel. Head graduated right and left to 30°, 45° and 60°. 2 1/4-inch head, 6 7/32 inch rule. Rule marked in 32nds and 64ths of an inch. Tensioned slide locks at any depth.

ORDER INFO: See warranty, opposite pg. Wt. 4 oz.
9 GT 40442\$6.35

(27) 25-pc. Radius or Fillet Gauge Set

Stainless steel. Corresponding external, internal forms. Includes: 16 gauges (1/32 to 1 1/4 by 64ths), 8 gauges (1/32 to 1/2 by 32nds), 4-in. gauge holder, case. Meets Federal Specs. GGG-G-17a. Type VII for accuracy.

ORDER INFO: See warranty on opposite page. Shpg wt. 1 lb.
9 GT 40952Set \$26.90

(28) Tweezers

Nickel-plated steel.

TYPES. ORDER INFO: See warranty, opposite page.

6-inch straight end.
Shpg. wt. 4 oz.
9 GT 4459\$1.80

6 1/2-inch bent end.
Shpg. wt. 4 oz.
9 GT 4460\$1.80

(29) Reference Table Rule. Stainless steel. 6 inches long. Graduated in 32nds and 64ths of an inch. With decimal equivalents, tap and drill data.

ORDERING INFO: See warranty on opposite page.
9 GT 4011—Shipping weight 4 ounces\$2.40

(30) Protractor. Stainless steel. Rectangular head. Scale double graduated 0 to 180°. Adjustable spring tension holds setting. Sets at true zero.

ORDERING INFO: See warranty on opposite page.
9 GT 4029—Shipping weight 5 ounces\$5.85

(31) Combination Rule. Stainless steel. Graduated in 32nds and 64ths of an inch. Plastic storage case.

ORDERING INFO: See warranty on opposite page.
9 GT 4026—Shipping weight 4 ounces\$3.80

(32) Magnetic Scale Magnifier. Just place on metal rule or gauge. . . . magnet holds in place. 5 power lenses make it easy to read graduations.

ORDERING INFO: See warranty on opposite page.
9 GT 40872—Shipping weight 4 ounces\$2.90

(33) Chrome-plated Stainless Steel Rules

SIZES. ORDER INFO: See warranty, opposite page.

Catalog Number	Size inches	Graduations		Type	Wt. oz.	Each
		Front	Back			
9GT40996	6 x 1 1/2	1/16, 1/32 in.	1/32, 1/64 in.	Flex.	3	\$2.90
9GT40136	6 x 3/4	1/16, 1/32 in.	1/32, 1/64 in.	Rigid	3	3.40
9GT40991*	12 x 1 1/2	1/32, 1/64 in.	1, 0.5mm	Rigid	5	7.80

*Carbon steel

(34) Stainless Steel Rules

SIZES. ORDER INFO: Not Craftsman. Shpg. wt. 3 oz.

Catalog Number	Size inches	Graduations		Type	Each
		Front	Back		
9 GT 4030	6 x 1/2	1/16, 1/32 in.	Dec. equiv.	Flex.	85c
9 GT 4006	6 x 3/4	1/32, 1/64 in.	Dec. equiv.	Flex.	\$1.25
9 GT 4035	6 x 1 1/2	1, 0.5mm		Flex.	85c

Inspection Mirrors, Eye Loupe, Magnifiers

(35) Inspection Mirror with Magnetic Base. Magnet with quick-release lever holds 2 1/2 x 3 1/2-inch mirror. Adjustable.

ORDER INFO: See warranty, p. 84.
9 GT 4095—Wt. 1 lb. 1 oz.\$13.90

(36) Inspection Mirror.

2 1/8 x 3 1/2 inches. Steel handle telescopes from 11 1/4 to 15 1/4 inches.

ORDER INFO: See warranty, p. 84.
9 GT 4098—Shpg. wt. 8 oz.\$3.25

(37) Oval Inspection Mirror

1x2-inch oval. 8 1/2-in. overall length. Steel handle.

ORDER INFO: See warranty, p. 84.
9 GT 4097—Shpg. wt. 4 oz.\$1.90

(38) Large Round Inspection Mirror

2 1/4-inch diameter. Steel handle telescopes from 10 to 14 inches.

ORDER INFO: See warranty, p. 84.
9 GT 4070—Shpg. wt. 7 oz.\$3.25

(39) Round Inspection Mirror

7/8-inch diameter. 7 1/4-inch overall length. Steel handle.

ORDER INFO: See warranty, p. 84.
9 GT 4096—Shpg. wt. 4 oz.\$1.50

(40) Pocket Magnifier

Two 4 power lenses, 1 1/4-inch diameter. Plastic case.

ORDER INFO: See warranty, p. 84.
9 GT 40813—Shpg. wt. 3 oz.\$6.30

(41) Eye Loupe. 1 1/2 in., 4 power.

ORDER INFO: See warranty, p. 84.
9 GT 40879—Shpg. wt. 3 oz.\$2.40

(42) Lighted Desk Magnifier

Light shines thru 4x2-inch, 1.25 power lens. 8-inch focal length. 5x5x5-inch folding stand. Adjustable.

ELECTRICAL INFORMATION: 115-volt, 60-Hertz. AC. 7 watts. Switch on 6-foot cord. UL listed.

ORDER INFO: See warranty, p. 84.
9 GT 40874—Wt. 1 lb. 7 oz.\$17.50

(43) Desk Magnifier

Steel base. 2-inch diameter, 1.7 power lens. Adjusts.

ORDER INFO: See warranty, p. 84.
9 GT 40871—Shpg. wt. 14 oz.\$9.80

(44) Battery-powered 3 1/4-inch diameter Magnifying Glass

Pre-focused bulb throws light below 2 power lens. Unbreakable plastic handle, frame. 3 3/4 inches wide, 9 1/8 inches long. With 4 AA penlite batteries, 1 bulb.

ORDERING INFO: Not Craftsman.
9 GT 40823—Shpg. wt. 11 oz.\$12.50

(45) Battery-powered 1x1-inch Magnifying Glass

Pre-focused bulb, 4 power lens. Durable plastic handle, frame. 4 1/2 in. long. With 2 AAA batteries, 1 bulb.

ORDERING INFO: Not Craftsman.
9 GT 40821—Shpg. wt. 5 oz.\$3.90

Replacement Batteries and Bulb for (45), above. Includes 2 AAA alkaline batteries, 1 pre-focused bulb.

ORDERING INFORMATION:
9 GT 40822—Shpg. wt. 3 oz.\$1.29



Electricians'
Shop

Sears Electrical Testers and Analyzers

You don't have to guess about correct wiring... our test equipment will help you spot dozens of the most common wiring errors and problems



(1) Volt-Ohm Ammeter. Includes carrying case, battery recharger and fuses. TESTS: Easy-to-read 3½ digit liquid crystal display indicates function being measured. 50,000 hour battery life reduces battery replacement. Measures up to 750-volts AC, 1000 amps AC and 1999 Ohms. Measures voltage and current surges. CASE: Plastic. 34-in. long PVC test leads. SIZE: Measures 9½x3½x1½ in. ORDERING INFO: See line cord energizer accessory (4) below, right. Shipping weight 2 lbs. 8 oz. 34 GT 5192\$179.95

(2) Volt-Ammeter. Meter swivels for easy reading in awkward positions. TESTS: Meter adjusts to read from 0 to 150 amperes in 2 ranges and from 0-150/600 volts AC. Scales are color-coded: red for volts and black for amperes. Snap jaws around one conductor to take measurements. CASE: Jaws and upper section of meter swivel through 5 separate positions... a full 180°. PVC test leads and carrying pouch with belt loop. SIZE: Measures 2½x6 inches high. 30-inch test leads. ORDERING INFORMATION: See line cord energizer accessory (4) at right. 34 GT 5195—Wt. 1 lb. 4 oz.\$49.99

(3) MINIPROBE™ Volt-Ammeter. Convenient compact size fits in shirt pocket... tool box. TESTS: Reads from 0 to 100 amps and from 0 to 250 volts AC. Color-coded scales. CASE: Black plastic. SIZE: 2½x4½ in. high. ORD. INFO: See line cord energizer accessory (4) below. Shipping weight 8 ounces. 34 GT 5188\$34.99

(4) Line Cord Energizer Multiplies sensitivity of volt-ammeters above by 10 times. Splits double conductor line cord for direct readings under load conditions without actually cutting the conductor. Allows voltage readings at the outlet with equipment in use without disconnecting it from the line. Plugs in. CASE: Black plastic. SIZE: 2½x4½ in. high. ORDERING INFORMATION: Shipping weight 6 ounces. 34 GT 5197\$9.99



(5) Digital Volt-Ohm Milliammeter Bright 3½ digit LED display. TESTS: See chart below. "Lab grade" 1% DC accuracy, automatic "zeroing" and polarity. Heavily protected against overload damage in all functions. High/low power ohms and 10 megohm input impedance for accurate solid state circuit measurements. Out-of-range indication. Uses 4 "C" batteries, not incl. SIZE: Measures 4½x2x6½ inches high. ORDER INFO: Shpg. wt. 2 lbs. 34 GT 5160\$99.99

Black leatherette Carrying Case 34 GT 5162—Shpg. wt. 12 oz.\$7.99

AC Adapter/Battery Recharger. Recharger function works only with rechargeable batteries. For meter (5) sold above. 34 GT 5163—Shpg. wt. 7 oz.\$8.99

(6) Volt-Ohm Milliammeter with Temperature Ranges TESTS: See chart below. Measure temperatures -40°F to +1200°F with optional temperature probe sold below. Pushbutton temperature calibration. 3½x1½x5¼ in. high. CASE: Plastic. Batteries, 40-in. test leads and vinyl carrying pouch are included. ORDER INFO: Shpg. wt. 3 lbs. 34 GT 5189\$79.99


(7) Pocket-size Volt-Ohm Milliammeter Tests basic electrical functions. Convenient compact size. TESTS: See chart below. Check controls, relays, small motors and appliances. CASE: Plastic. Battery, 40-inch test leads and vinyl carrying pouch are included. SIZE: Measures 3¼x1½x4¼ inches. ORDERING INFORMATION: Shipping weight 1 pound. 34 GT 5194\$29.99

(8) Economy Volt-Ohm Milliammeter Convenient compact size fits in shirt pocket... tool box. TESTS: See chart below. Can be used for AC line voltage, DC control circuitry, continuity, DC milliamps. CASE: Plastic. Includes battery and 22-inch test leads. SIZE: Measures 2½x1½x3¾ in. ORDERING INFORMATION: Shipping weight 7 ounces. 34 GT 5161\$14.95

Item	AC volts	DC volts	DC milliamps	Ohms	Decibels
(5)	.001 to 1000	.001 to 1500	.001 to 1.999*	.1 to 20M	
(6)	6 to 1200	.6 to 1200	.03 to 600	5K to 50M	-10 to +63
(7)	10 to 1000	2.5 to 1000	.05 to 250	4K to 40K	-20 to +62
(8)	0 to 600	0 to 600	0 to 150	1K to 100M	

NOTE: Accuracy is ± 3% of full scale DC and ± 4% of full scale AC. *Also applies to AC.

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

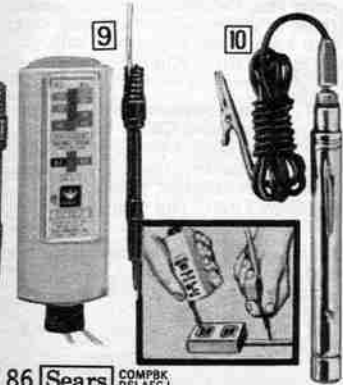

(9) Voltage Tester TESTS: Checks for 110-550-volt AC and 110-600-volt DC; checks circuit continuity; determines DC polarity; finds blown fuses, grounding and leakage. CASE: SIZE: ABS plastic case; 28-inch test leads. 5¼ inches long. 5¼ inch test probes. ORDERING INFORMATION: Shipping weight 14 oz. 34 GT 5193\$14.89

(10) Continuity Tester TESTS: Checks continuity and low resistance shorts. Uses two "AA" batteries, not included. CASE: SIZE: Chrome-plated metal. 5½ inches long. 54-inch long test lead with alligator clip. ORDERING INFORMATION: Shipping weight 3 ounces. 34 GT 5190\$5.95

(11) Plug-in Analyzer For grounded outlets Just plug in and match pattern of lights to coded keys to confirm correct wiring or to identify trouble. TESTS: For 3-wire electrical outlet (test 2-wire outlet by using adapter, not incl.) Determines open ground; open hot; open neutral; hot and ground reversed; hot and neutral reversed. Also indicates correct wiring. Coded key pattern is on both sides. U.L. listed. CASE: SIZE: Plastic. Measures 1½x2½ inches long. ORDER INFO: Shpg. wt. 2 oz. 34 GT 6090\$2.99




Electrical Repair Kits

With terminals and connectors to handle most electric chores



150-piece Kit
\$18.95

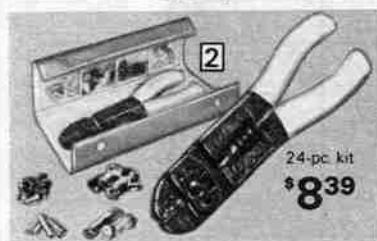

24-pc. kit
\$8.39



924-pc. Kit

\$69.99

560-pc. Kit

\$44.99

300-pc. Kit

\$29.99

(1) 150-piece Electrical Repair Kit

Includes all-purpose 7 1/2-in. tool. Plastic storage box.

Terminal Description	Qty.	Wire Ga. Size	Stud Size
Closed-end splice	7	18-10	10
Spade	15	16-14	10
Spade	4	12-10	10
Spade flag	15	16-14	6
Spade-end flange	15	22-16	6
Ring	15	22-16	10
Ring	15	16-14	10
Ring	15	16-14	6
Ring	4	12-10	10
Faston™ receptacle	12	16-14	10
Butt connector	15	22-16	10
Butt connector	12	16-14	10
Butt connector	6	12-10	10

ORDERING INFORMATION:

Shipping weight 2 lbs. 2 oz.
34 GT 6080 Kit \$18.95

(2) 24-piece Standard Kit

Includes all-purpose 7 1/2-in. tool. Case can be mounted on workbench.

Terminal Description	Qty.	Wire Ga. Size	Stud Size
Butt connector	3	22-16	10
Butt connector	3	16-14	10
Ring	1	22-16	10
Ring	2	22-16	5-6
Ring	2	16-14	10
Ring	1	16-14	6
Ring	2	12-10	10
Spade	2	22-16	10
Spade	2	16-14	10
Spade	2	12-10	10
Closed-end splice	2	18-10	10
Closed-end splice	2	12-10	10

ORDERING INFORMATION:

Shipping weight 1 lb. 1 oz.
34 GT 6084 Kit \$8.39

Refill Terminals and Connectors

(9 thru 13) These terminals and connectors provide reliable wire connection quickly and easily. Just insert wire into terminal barrel and use crimping tool.

SPECIFICATIONS, ORDERING INFO: See chart below.

Terminal Description	Wire Size	Stud Size	Quantity	Catalog Number	Wt. oz.	Price
(9) Spade	22-16 Ga.	8-10	62	34 GT 7510	2	\$3.99
Spade	22-16 Ga.	4-6	62	34 GT 7512	7	3.99
Spade	16-14 Ga.	8-10	62	34 GT 7511	7	3.99
Spade	16-14 Ga.	4-6	62	34 GT 7513	7	3.99
(10) Ring	22-18 Ga.	8-10	62	34 GT 7508	1	3.99
Ring	22-18 Ga.	4-6	62	34 GT 7508	2	3.99
Ring	16-14 Ga.	8-10	62	34 GT 7507	2	3.99
Ring	16-14 Ga.	4-6	62	34 GT 7509	2	3.99
(11) Butt	22-16 Ga.	8-10	48	34 GT 7500	5	3.99
Butt	16-14 Ga.	8-10	48	34 GT 7501	2	3.99
Butt	12-10 Ga.	8-10	31	34 GT 7502	3	3.99
(12) Faston	16-14 Ga.	8-10	38	34 GT 7503	2	3.99
Closed-end splice	22-14 Ga.	8-10	74	34 GT 7504	2	3.99
	18-10 Ga.	8-10	74	34 GT 7505	2	3.99



Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Appliance Repair Kits

For Sears, Whirlpool, GE, Westinghouse... nearly all makes and models of appliances

APPLIANCE TECHNICIANS: Now you can get a terminal repair kit specifically designed to replace OEM uninsulated open and closed barrel terminals. Can be used on most all makes and models of

- Refrigerators and air conditioners
- Dishwashers
- Washing machines and dryers
- Ranges, heating units
- Plus a master repair kit



Master Kit
\$49.99

Specialized Kits
Low as \$24.99

142-pc. Kit

AMP Service Tool

(6 and 7) Appliance Repair Kits

CONSTRUCTION: Heavy-duty, all-welded steel box. Master kit with compartments, specialized kits with vials. Assorted insulated terminals, conductors (see chart, below). Coded lid sheet.

ORDERING INFORMATION: Reorder additional terminals, connectors from local Sears Service Center by STD number on vial or coded sheet on Master Kit.

(6) AMP 435-pc. Master Appliance Kit. Use as central supply for replenishing repair kits or for making all 4 kinds of repairs.
34 GT 7521—Shipping weight 5 lbs. 2 oz. \$49.99

(7) AMP 142-piece Laundry Repair Kit
34 GT 7521—Shipping weight 1 lb. 4 oz. \$24.99

AMP 213-piece Refrigeration and Air Conditioning Kit
34 GT 7522—Shipping weight 1 lb. 4 oz. \$24.99

AMP 162-piece Dishwasher Repair Kit
34 GT 7523—Shipping weight 1 lb. 4 oz. \$24.99

AMP 158-piece Range and Heating Repair Kit
34 GT 7524—Shipping weight 1 lb. 4 oz. \$24.99

Terminal Description	Quantity					Wire Gauge Size
	Master	Laundry	Refrigerator	Dishwasher	Range/Heating	
Faston™ receptacle	15	15	15	15	15	20-16
Faston™ receptacle	15	15	15	12	10	18-14
Faston™ receptacle	10	10	15	10	10	18-12
Faston™ receptacle	10	10	15	10	10	14-12
Faston™ Piggyback Receptacle	10	10	15	10	10	18-14
Timer terminal	15	20	15	15	15	20-16
Timer terminal	25	20	15	15	15	16-14
PC contact	15	15	15	15	15	22-20
PC Connector contact	15	15	15	15	15	22-18
Connector contact	10	10	10	10	10	20-16
Connector socket	15	15	15	10	10	20-14
Connector pin	15	15	15	10	10	20-14
Connector contact	15	10	15	15	15	16-14
PC Plug connector contact	15	15	15	15	15	22-18
Blade receptacle	5	5	5	5	5	20-14
Pin receptacle	15	15	15	15	15	20-14
Cluster pin receptacle	15	15	15	15	15	18-12
Pin receptacle	15	15	15	15	15	12-8
Pin receptacle	15	15	15	15	15	12-8
Insulated closed-end splice	15	10	10	10	10	18-10
Insulated closed-end splice	15	10	10	10	10	22-16
Insulated splice	15	10	10	10	10	22-16
Insulated splice	15	10	10	10	10	16-14
Insulated splice	15	10	10	10	10	12-10
Uninsulated splice	15	15	15	15	15	12-10
Uninsulated splice	15	15	15	15	15	16-14
Uninsulated ring	15	10	15	15	15	16-14
Uninsulated ring	15	10	15	15	15	12-10
Heat shrink tubing	2	2	2	2	2	2
Extraction tool	1	1	1	1	1	1
Mate-n-lock tool	1	1	1	1	1	1
Socket	15	15	15	15	15	15
Pin	15	15	15	15	15	15
Metal box	1	1	1	1	1	1

Save \$5 when you buy AMP Tool with any kit above

(8) Specially designed for crimping terminals and splices in kits sold above. All-purpose tool crimps open and closed barrel terminals. Special notch for FLAG, TAB, LOK and FASTON™ terminals. Cuts bolts, strips wire, measures studs and wire.

CONSTRUCTION: Carbon tool steel austempered for long life.

ORDERING INFORMATION: Shipping weight 7 lbs. 15 oz.
34 GT 7526—Ea. \$22.99; Price when bought with kit above \$17.99



Electricians'
Shop

\$44⁹⁵

(1) **Heat Gun.** Combines high heat intensity with low air volume to shrink heat-shrinkable plastics and perform a variety of functions (see right). CONSTR: Noryl** high-impact plastic housing; pistol-shaped handle grip for positive control. 3-position thumb switch; hot, cool or off. In operation the gun can be hand held or stood on either side, top or back. Slip-on deflector helps give uniform heating; increases performance up to 25%. Incl. nozzle for stand applications (800° to 1000° F.). MOTOR: Shaded pole, brushless type motor operates at 3300 rpm. Low air volume for less heat build-up in work area. Current consumption is 4.5 amps maximum. Vertical impeller eliminates dust, dirt, moisture, etc., from going through the motor. Pilot light signals when unit is running. SIZE: Measures 8 3/4 in. long, 7 in. high. ELECTRICAL INFORMATION: UL listed 120-volt, 60-Hertz, 475 watts, 7-foot cord. ORDERING INFORMATION: 34 GT 5135—Shpg. wt. 2 lbs. 10 oz. \$44.95

**Registered G.E. trademark for thermoplastic



Electric Heat Gun

Heats, melts, softens, shrinks, molds, dries, thaws, bends and fuses... provides instant flameless heat

(2) Shrinking Tubes

CONSTRUCTION: Polyolefin plastic. Operating temperature: -65° to +130°F. 6 inches long. TYPES. ORDERING INFORMATION:

Thickwall Tubes. Shrinking ratio is 3:1. Waterproof. 9-piece red and black assortment.

34 GT 5133—Shipping weight 7 ounces ... \$11.99

Thinwall Tubes. Shrinking ratio is 2:1. 18-piece red, black and clear assortment.

34 GT 5134—Shipping weight 2 ounces ... \$5.99

(3) Additional Nozzles

CONSTR: Double wall metal; mica heating element. TYPES. ORDERING INFORMATION:

High heat nozzle (red). For Teflon* applications. 1000° to 1250°F temperature range.

34 GT 5138—Shpg. wt. 4 oz. \$7.95

Low heat nozzle (green). For Mylar* polyester film applications. 600°-800°F. temp. range.

34 GT 5136—Shipping weight 4 ounces ... \$7.95

*Registered DuPont trademark

YOU CAN DO IT

... you'll be surprised at what you can do with your Electric Heat Gun. All you need is a little know-how and you can do it!



(4 thru 6) Electric Power Outlet Strips

Low as \$15⁹⁵ 4 outlets

Just plug into any other 110-120-volt AC outlet. Can be wall-mounted.

CONSTRUCTION: Enameled steel. Circuit breaker. Heavy-duty 14-gauge, 3-wire, 6-ft. cord. Strip is completely wired and assembled. (4) and (6) have on/off rocker switch.

ELECTRICAL INFORMATION: UL listed 110-120-volt AC. Rated capacity 15 amps.

SIZES. ORDERING INFORMATION:

	Grounded Outlets	Lgh. in.	Catalog Number	Wt. lbs./oz.	Price each
(4)	6	12	34 GT 5021	2 4	\$21.95
(5)	8	48	34 GT 5012C	6	29.95
(6)	4	8	34 GT 5020	1 11	15.95

(7 and 8) Ground Fault Circuit Interrupters

Designed to help protect a person from dangerous shock by turning off current within 1/2 of a second after leakage occurs... they're faster than fuses and other types of circuit breakers which protect the appliance rather than the person.

(7) Indoor Wall Outlet Type

Provides protection for any other outlets that are wired after it on the same circuit.

CONSTRUCTION: Plastic; includes wall cover plate. Built-in test circuit. Fits outlet boxes with minimum 2 1/2-inch depth.

ELECTRICAL INFORMATION: UL listed 110-120-volt AC. Rated capacity 15-amps.

ORDERING INFORMATION: Shipping weight 10 ounces. 34 GT 5326 ... \$29.99

(8) Portable Plug-in Type

For indoor use. Can be used in 2-wire or 3-wire outlet. Grounded prong can be retracted.

CONSTRUCTION: Beige plastic case. Red light indicates circuit is disconnected. Side-by-side receptacles.

ELECTRICAL INFORMATION: UL listed 110-120-volt AC. Rated capacity 15-amps.

ORDERING INFORMATION: Shipping weight 1 pound. 34 GT 5316 ... \$49.50

(9) Electricians' Stripper.

Cleanly strips 10-18-ga. solid wire.

CONSTRUCTION: Steel. Cushioned handles. 6 in. long.

ORDERING INFORMATION:

34 GT 6071—Shipping weight 5 ounces ... \$3.94

(10) Automatic Stripper.

For 8-22 ga. wire. Reduces damage.

CONSTRUCTION: Steel. Cushioned handles. 7 in. long.

ORDERING INFORMATION:

34 GT 6072—Shipping weight 14 ounces ... \$10.89

(11) Electronic Wire Stripper.

Strips cleanly 16-26-gauge stranded wire. Cuts wire, forms loops.

CONSTRUCTION: Steel. Plastic handle grips. 6 inches long.

ORDERING INFORMATION:

34 GT 6083—Shipping weight 5 ounces ... \$3.89

(12) TV Lead-in Wire Stripper.

For both standard parallel 300 OHM or foam type TV lead-in wire.

CONSTRUCTION: Steel. Measures 6 inches long.

ORDERING INFORMATION:

34 GT 6082—Shipping weight 5 ounces ... \$6.39

(13) Coaxial Cable Stripper.

Adjustable blades for fast end or window strips. Strips 1/4 inch O.D. to 1/2 inch O.D.

CONSTRUCTION: Plastic. Measures 3 1/2 inches long.

ORDERING INFORMATION:

34 GT 6079—Shipping weight 2 ounces ... \$7.89

(14) Stripper/crimper/cutter.

Cuts and strips 10 to 22 gauge wire. Crimps insulated terminals and connectors. Cuts bolts.

CONSTRUCTION: Steel. Cushioned handles. 7 1/2 inches long.

ORDERING INFORMATION:

34 GT 6098—Shipping weight 9 ounces ... \$6.49

Stripper/crimper.

(Not shown.) As above except no bolt cutter.

34 GT 6096—Shipping weight 8 ounces ... \$7.79

(15) Multi-Crimp Tool.

Solid leverage for easy cutting; crimps bare and insulated terminals on 22 to 10 AWG wire.

CONSTRUCTION: Steel. Cushioned handles. 9 inches long.

ORDERING INFORMATION:

34 GT 6069—Shipping weight 1 pound ... \$9.99

(16) Portable or Bench-mount Conduit Vise.

For clean cut-offs of 1/2 to 2-in. outside diam. conduit, hose, dowling, copper, plastic or thinwall tubing. Use with 24 or 32 tooth hacksaw blades.

CONSTR: Cast iron, steel. Mitre-box saw guide. Holes for bench mounting. Large, free-spinning thumb-nut clamp swings away to hold conduit. Contoured grip. 3x3 1/4x8 in. long.

ORDERING INFORMATION:

34 GT 5007—Shipping weight 2 pounds 4 ounces ... \$11.99

(17) Fish Tape Reel.

For pulling wire through conduit.

CONSTRUCTION: Light-weight reel of high-impact plastic. Large grips with grained surface for non-slip handling. Built-in winder.

ORDERING INFORMATION:

Reel with 40 feet of tape. 7-inch diameter reel.

34 GT 5139—Shipping weight 1 pound 8 ounces ... \$9.49

Reel with 100 feet of tape. 12-inch diameter reel.

34 GT 5140—Shipping weight 4 pounds ... \$18.79




(18) Bender for 1/2 and 3/4-inch thinwall conduit.

CONSTRUCTION: Steel. Built-in degree scale. Extended foot increases leverage. Steel handle not included, order below.

ORDERING INFORMATION:

34 GT 5005—Shipping weight 5 pounds ... \$14.99

34 GT 5006C—38-inch Steel Handle. Shpg. wt. 4 lbs. ... 5.99

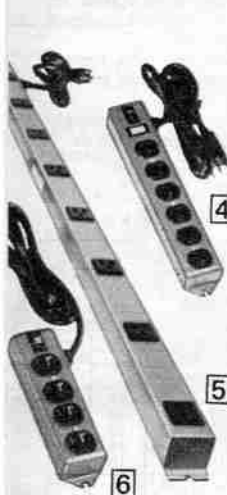
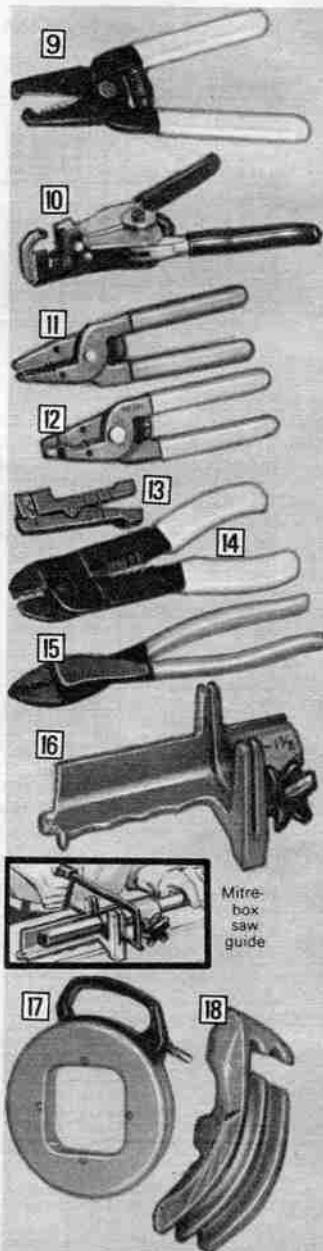


Wire-in Indoor Wall Outlet type
\$29⁹⁹



Portable Plug-in type
\$49⁵⁰

88 Sears COMPBA GJEDKLS

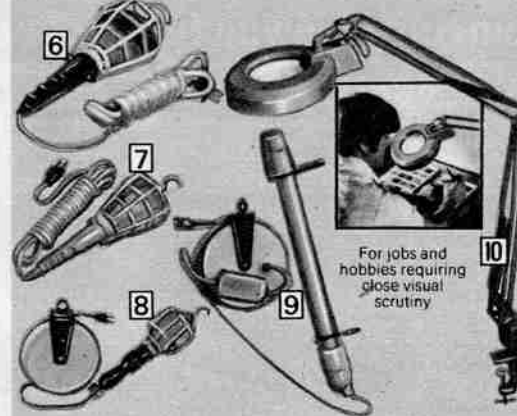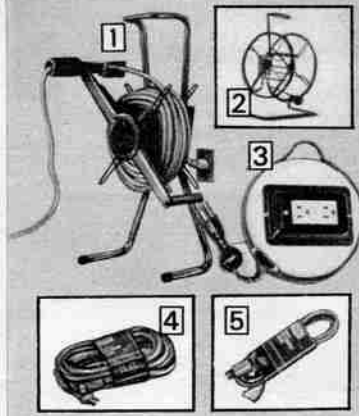

(1) Portable Reel with cord guide

CONSTRUCTION: Heavy-gauge steel reel with baked on orange enamel finish. Holds up to 100 feet of 14/3 "ST" cord (not included). Chrome-plated tubular steel stand. Mount on most walls or near convenient power source. Measures 27 1/2 inches high.

ORDERING INFORMATION:
34 GT 5864C—Shpg. wt. 13 lbs. ...\$21.99

(2) Portable Reel

CONSTRUCTION: Steel frame with rust-resistant finish and wooden handle. Reel holds up to 100 feet of 14/3 "ST" cord (not included).

ORDERING INFORMATION:
34 GT 5866—Shpg. wt. 2 lbs.\$7.69

(3) Retractable Reel with duplex outlet

CONSTRUCTION: Plastic reel with grounded duplex outlet on front. Includes 15 feet of 18/3 HPN cord.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hz. AC.

ORDERING INFORMATION:
34 GT 5885—Shpg. wt. 4 lbs.\$9.99

(4 and 5) Extension Cords. Use extra heavy-duty 14-gauge cord both indoors and outdoors for larger powered tools. Use 16-gauge indoors for smaller powered tools.

CONSTRUCTION: Insulated, water-repellent thermoplastic jacket.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hertz AC.

GAUGE, LENGTH, AMP CAPACITY, ORDERING INFORMATION:

Length feet	Amp. capacity	Catalog Number	Wt. lbs. oz.	Price
-------------	---------------	----------------	--------------	-------

(4) 14-gauge 3-wire "ST" Outdoor				
25 ...	15	34 GT 5834	4 7	\$7.99
50 ...	15	34 GT 5835	10 ...	12.99
100 ...	13	34 GT 5836C	16 ...	22.99

(5) 16-gauge 3-wire "SPT-2" Indoor				
15 ...	13	34 GT 5803	1 15	\$3.59
25 ...	13	34 GT 5804	1 9	4.39
50 ...	13	34 GT 5805	3 5	6.99

(6) Incandescent Trouble Light

CONSTR: Plastic handle, bulb guard, reflector. Yellow vinyl-covered SJT 2-wire, 18-ga. cord. On/off switch.

ELECTRICAL INFO: UL listed 110-120-volt, 60-Hz. AC. Use up to a 75-watt bulb (not incl.).

CORD LENGTHS, ORDERING INFORMATION:

34 GT 5916—15-ft. cord. Wt. 1 lb. 12 oz.	\$3.79
34 GT 5917—25-ft. cord. Wt. 2 lbs.	4.89

(7) Incandescent Trouble Light with outlet

CONSTR: Plastic handle, bulb guard, reflector. Orange vinyl-covered heavy-duty SJTW 3-wire, 16-gauge cord. On/off switch and grounded outlet in handle.

ELECTRICAL INFO: UL listed 110-120-v., 60-Hz. AC. 15-ft. cord. Use up to a 75-w. bulb (not incl.).

ORDERING INFORMATION:
34 GT 5918—Shipping weight 1 pound\$6.49

(8) Incandescent Trouble Light with reel

CONSTRUCTION: Enameled metal reel, plastic bulb guard and reflector. Self-locking reel with thermoplastic covered cord. On/off switch.

ELEC. INFO: UL listed 110-120-v., 60-Hz. AC. 20-ft. cord: SVT 2-wire, 6-amp rated. 35-ft. cord: SJT 3-wire, 7-amp rated. Use up to a 75-w. bulb (not incl.).

CORD LENGTHS, ORDERING INFORMATION:
34 GT 5889—20-ft. cord. Wt. 5 lbs. 2 oz.\$10.49
34 GT 5894—35-ft. cord. Wt. 11 lbs. 17.99

(9) Fluorescent Trouble Light with reel

CONSTR: 15-watt bulb incl. Tough plastic casing. Handle end caps of oil-resistant vinyl, on/off switch. Yellow SVT 18-ga., 3-wire cord. Molded plug cap.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hertz AC. 15 watts. 20-foot cord.

ORDERING INFORMATION:
34 GT 5921—Shipping weight 8 pounds\$39.95

Light without Reel. (Not shown.) As above except cord is SJT cord in 25-foot length.


34 GT 5920—Shipping weight 4 pounds\$29.95

(10) Fluorescent Lamp with 3-power lens

CONSTRUCTION: 4 3/4 in. viewing area with 3-power magnification. 3-diopter, 13-in. focal length lens is precision-ground and polished for clear viewing, low distortion. 22-watt circine bulb incl. Adjustable 45-in. long double-tension arm. Attaches to surface up to 2 1/4 in. thick with "C" clamp. Gray enameled metal.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hz. AC. 22 watts. 7-foot cord.

ORDERING INFORMATION:
34 GT 5922—Shipping weight 8 pounds\$59.95



(11) Craftsman Rechargeable Lantern. Recharges up to 200 times ... provides up to 4 hours of light per charge.

CONSTR: Orange high-impact plastic case. On/off switch. Adjustable light beam focus. Raintight. Luminous rim on 4 1/2-in. diameter lens. Standard flashlight bulb included. Measures 8x5x5 in. high.

ELEC. INFO: Built-in recharger. UL listed 110-120-volt. AC.

ORDERING INFORMATION: See Warranty below.
34 GT 4817—Shipping weight 2 pounds 2 ounces\$16.99

(12) Craftsman 6-volt Rechargeable Battery Kit. Includes rechargeable 6-volt lantern battery and two chargers. Lab tests prove this battery maintains almost full-rated output for up to 4 1/2 hours of continuous use. Recharges up to 200 times. Fits standard 6-volt battery-powered equipment. Measures 2 1/2x2 1/2x3 3/4 inches high.

CHARGERS: AC charger charges battery from 110-120-volt AC outlet. DC charger charges battery from car cigarette lighter.

ORDERING INFORMATION: See Warranty below.
34 GT 4647—Shipping weight 2 pounds\$17.99

Extra Battery. Cannot be used alone.

34 GT 4646—Shipping weight 1 pound 8 ounces\$11.99

FULL ONE YEAR WARRANTY ON RECHARGEABLE BATTERY AND CRAFTSMAN RECHARGEABLE LANTERN (EXCEPT LAMP). If, within one year from date of purchase, these items fail due to a defect in material or workmanship, Sears will replace them free of charge (excluding lamp on the rechargeable lantern). Warranty service is available by simply returning these items to the nearest Sears store in the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

(13) Craftsman Solder Gun Kit

CONSTRUCTION: Heavy-duty, dual-heat. Cyclocac® plastic housing. Trigger control. Heats over 1100°. 150-230 watts.

ACCESS: 4 tips, solder, case.

ORD. INFO: Warranty, p. 63.

Kit. Shpg. wt. 5 lbs. 1 oz.
9 GT 52855\$19.49

Gun alone. Wt. 3 lbs. 10 oz.
9 GT 52851\$16.49

100-140-w. Solder Gun

ORD. INFO: Warranty, p. 63.

Shpg. wt. 3 lbs. 2 oz.
9 GT 52841\$12.99

Replacement Tips for dual-heat guns above. Pkg. of 2.

ORDER INFO: Wt. 3 oz.
9 GT 52836—Gen.-duty\$1.79

9 GT 52837—Heat-seal 1.79

9 GT 52838—Plas.-cut 1.79

9 GT 52834—Fine work 1.79

(15) Craftsman 45-w. Soldering Iron Kit

CONSTR: Polymer handle. Heats over 850°.

ACCESSORIES: Stand, solder, wire stripper, 3 tips (1/8-in. pencil, chisel, 5/16-in. pyramid).

ELECTRICAL INFORMATION: UL listed. 110-120-volt, 60-Hz. AC. 4 1/2-foot cord.

ORDERING INFO: See warranty on page 63.

9 GT 53512—Shpg. wt. 8 oz.Kit \$10.59

Craftsman 27-w. Soldering Iron Kit. As above, but includes stand, solder, 2 tips (1/8-in. chisel, 5/16-in. pyramid). Heats over 700°.

ORDERING INFO: See warranty on page 63.

9 GT 54513—Shpg. wt. 8 oz.Kit \$7.99

Replacement Element. For 45-w. iron above.

9 GT 53518—Shpg. wt. 4 oz.\$4.69

Replacement Pyramid Tips. For 45, 27-w. irons sold above.

9 GT 53516—Shpg. wt. 3 oz.Pkg. \$1.49

Replacement Chisel Tip. 45, 27-w. irons sold above. Pkg. of 2.

9 GT 53517—Shpg. wt. 3 oz.Pkg. \$1.49

(16) Craftsman 200-watt Soldering Iron

CONSTR: Hardwood handle. 5/8-in. tapered chisel style, plated copper tip heats to 900°.

ELECTRICAL INFORMATION: UL listed. 110-120-v., 60-Hz. AC. 5-foot cord.

ORDERING INFO: See warranty on page 63.

9 GT 53832—Shpg. wt. 2 lbs. 1 oz.\$15.49

Replacement Tip. For 200-watt iron above.

ORDERING INFORMATION:
9 GT 53835—Shpg. wt. 12 oz.\$3.89

(17 and 18) Solder for a variety of tasks

(17) Wire Solder. Soldering compounds are made up of tin and lead. Generally, larger amounts of tin in a solder make for a stronger bond.

Acid and rosin-core solders have flux in core, eliminating the need for separate flux.

ORDERING INFORMATION:

Solid Wire Solder. For non-electrical work.

9 GT 80531 1-lb. spool 1/8 inch 40/60 1 lb. 4 oz. \$6.39

9 GT 80541 1-lb. spool 1/8 inch 50/50 1 lb. 4 oz. 7.39

Acid Core Solder. For non-electrical work.

9 GT 8051 1-lb. spool 1/8 inch 40/60 1 lb. 3 oz. \$6.39

Rosin Core Solder. For electrical work.

9 GT 8052 1-lb. spool 3/32 inch 40/60 1 lb. 3 oz. \$6.39

9 GT 8057 1-lb. spool 1/16 inch 60/40 1 lb. 2 oz. 8.39

(18) Silver Braze Wire Kit

For silver alloy steel. Melts at 1125° for extra strength. .56 ounce solder, .35 ounce tube of flux.

9 GT 80993—Shpg. wt. 4 oz.\$2.99

Aluminum Solder and Flux

Melts at 1070° for joining aluminum to most other metals. .47 ounce solder, .35 ounce tube of flux.

9 GT 80994—Shpg. wt. 5 oz.\$1.59

Stainless Steel Solder Kit

Lead-free ... safe for eating utensils. Provides shiny joint. 1.38 oz. solder, .35 oz. of flux.

Shpg. wt. 5 oz.

9 GT 80992\$2.99

COMPSK LAEGJD

CRAFTSMAN® Surveying Instruments give you fast, accurate readings...

FULL ONE YEAR WARRANTY ON CRAFTSMAN TRANSIT AND SIGHTING LEVELS: If, within one year from the date of purchase, any of these Craftsman Transit or Sighting Levels fails because of a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply returning the instrument to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SERVICE INFORMATION: If your Craftsman Transit or Sighting Level needs adjustment or repairs after warranty expires, simply contact the nearest Sears store or catalog sales store for fast factory service at reasonable cost.



All levels on this page available with tripods



Builders' Dumpy Level
\$99⁹⁹ level alone



Tilting Transit Level. Scope vial has sensitivity of 7-8 minutes per 2-mm division

\$174⁹⁵ level alone




Tilting Transit Level. Scope vial has sensitivity of 7-8 minutes per 2-mm division. Includes plate vial

\$199⁹⁵ level alone

New at Sears... Heavy-duty Tilting Transit Level. Nearly twice as accurate as level (C) at left. Scope vial has sensitivity of 4.5 minutes per 2-mm division. Features plate vial for added control

\$259⁹⁵ level alone

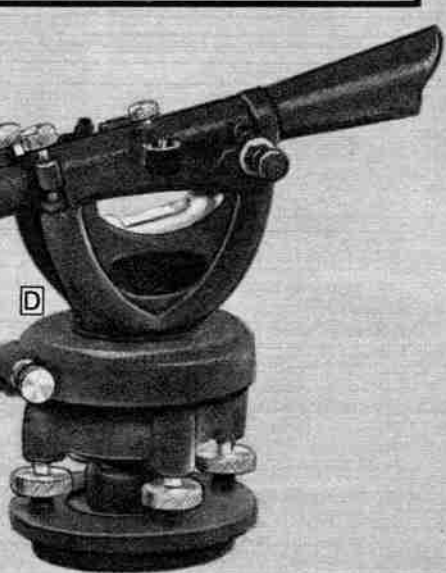

CONSTRUCTION: Brass, aluminum, glass. Achromatic lens. Precision-bored telescope. Rack-and-pinion focusing. Precision-machined fine motion parts. Dust-protected micrometer clamp, tangent screw(s) and leveling screws with easy-grasp knobs. Positive vial mountings. Shifting center for setting over a point.

RANGE: Primarily for work under 100 feet may be used to a maximum of 200 feet. Focuses from 4 1/2 feet to infinity.

ACCESSORIES: Includes carrying case with fitted polyethylene foam insert, plumb bob and instruction manual.

(A) Builders' Dumpy Level

Non-tilting, fixed-position level. Built-in sunshade.

CALIBRATIONS: Scope vial has sensitivity of 7-8 minutes per 2-mm division. Horizontal circle divided to single degrees in quadrants. Double disc-type vernier reads directly to 15 minutes (1/4°).

LENS: 18 power.

ORDER INFO: See warranty, service info, above. Wt. 7 lbs.

9 GT 46105C \$99.99

Level with stiff-leg tripod (9 GT 46081C) below. *Separate prices total \$144.98.* Wt. 19 lbs.

9 GT 46215C2 \$139.99

Level with extension-leg tripod (9 GT 46082C) below. *Separate prices total \$158.98.*

Shipping weight 21 pounds.

9 GT 46221C2 \$154.99

(B) Tilting Transit Level

Converts from transit to level.

CALIBRATIONS: Scope vial has sensitivity of 7-8 minutes per 2-mm division. Horizontal circle divided to single degrees in quadrants. Double disc-type vernier reads directly to 15 minutes (1/4°).

LENS: 16 power.

ORDER INFO: See warranty and service information above.

Shipping weight 7 pounds.

9 GT 46161C \$174.95

Level with stiff-leg tripod (9 GT 46081C) below. *Separate prices total \$219.94.* Wt. 19 lbs.

9 GT 46242C2 \$209.99

Level with extension-leg tripod (9 GT 46082C) below. *Separate prices total \$233.94.*

Shipping weight 21 pounds.

9 GT 46243C2 \$224.99

(C) Our most popular Tilting Transit Level

Built-in sunshade. Push-pull lock converts transit to level.

CALIBRATIONS: Scope vial has sensitivity of 7-8 minutes per 2-mm division. Horizontal circle divided to single degrees in quadrants. Double disc-type vernier reads directly to 15 minutes (1/4°).

LENS: 18 power.

ORDERING INFORMATION: See warranty and service information above. For increased control, order jeweled compass (7) sold separately below.

9 GT 46202C—Wt. 7 lbs. \$199.95

Level with stiff-leg tripod (9 GT 46081C) below. *Sep. prices total \$244.94.*

9 GT 46214C2—Wt. 19 lbs. \$239.95

Level with extension-leg tripod (9 GT 46082C) below. *Sep. prices total \$258.94.*

9 GT 46241C2—Wt. 21 lbs. \$254.95

(D) Heavy-duty Tilting Transit Level

Tapered center construction similar to engineers' transit (G) on opposite page. Tripod mounting with government standard 3/8-8 thread. Built-in sunshade. Strong push-pull lock converts transit to level.

CALIBRATIONS: Scope vial has sensitivity of 4.5 minutes per 2-mm division. Plate vial has sensitivity of 12-14 minutes per 2-mm division. Horizontal circle with double vernier reads directly to 5 minutes (1/12°). Vertical arc reads to single degrees with index.

LENS: 18 power.

ORDERING INFORMATION: See warranty and service information above.

9 GT 46203—Wt. 12 lbs. \$259.95

Level with stiff-leg tripod (9 GT 46084C) below. *Sep. prices total \$332.94.*

9 GT 46233C2—Wt. 26 lbs. \$324.95

Level with extension-leg tripod (9 GT 46085C) below. *Sep. prices total \$359.94.*

9 GT 46234C2—Wt. 26 lbs. \$349.95

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

(1 thru 7) CRAFTSMAN® Surveying Tools and Accessories

(1) Tripods with stiff legs. For relatively flat terrain. Steel legs, hardware. Painted yellow with white markings for safety. Leg-binding strap portability. Legs do not extend.

SIZES, ORDERING INFORMATION:

60 inches long; for levels (A), (B), (C) above.

9 GT 46081C—Shpg. wt. 12 lbs. \$44.99

58 inches long; for levels on page 91 and (D) above.

9 GT 46084C—Shpg. wt. 14 lbs. \$72.99

(2) Tripods with extension legs. For hilly, uneven terrain. Legs adjust independently of each other. Steel legs, hardware. Wood center stick. Painted yellow with white markings for safety. Includes handy leg-binding strap.

SIZES, ORDERING INFORMATION:

Extends 35 to 58 in.; for levels (A), (B), (C) above.

9 GT 46082C—Shpg. wt. 14 lbs. \$58.99

Extends 37 to 59 in.; for levels on p. 91, (D) above.

9 GT 46085C—Shpg. wt. 14 lbs. \$99.99

(3) Sliding-section Leveling Builders' Rod. Maple. Clip-on target. Marked in feet, inches, 1/4 inch. Vernier reads to 1/64 inch.

SIZES, ORDERING INFORMATION:

9 GT 46121C—10-foot rod. Wt. 7 lbs. \$48.99

9 GT 46122C—15-foot rod. Wt. 9 lbs. \$58.99

Engineers' Rod (not shown). Similar to (3) but marked in feet, 1/10 foot and 1/100 foot. Vernier reads to 1/1000 foot.

SIZES, ORDERING INFORMATION:

9 GT 46112C—10-foot rod. Wt. 7 lbs. \$48.99

9 GT 46113C—15-foot rod. Wt. 9 lbs. \$58.99

(4) Locke-type Hand Level. For rough survey. Steel. Adjustable focus. . . . vial magnifies 4 times. Vinyl pouch, belt loop. 6 1/2 inches long.

ORDERING INFORMATION:

9 GT 4600—Shipping weight 11 oz. \$29.99

(5) Nickel-Plated Plumb Bob. Steel. Removable cap. Hexagonal shape.

SIZES, ORDERING INFORMATION:

9 GT 38401—5-oz. size. Wt. 7 oz. \$1.09

9 GT 38402—8-oz. size. Wt. 10 oz. 1.39

(6) Pocket Sight and Surface Level. For preliminary survey. Aluminum. 5 inches long. Case.


ORDERING INFORMATION:

9 GT 4624—Shipping weight 13 oz. \$12.99

(7) Jeweled Compass. Steel. 4-in. diameter. Needle adj. for dip. Variation ring in quadrants to 1°. Adj. to plus or minus 40° declination.

ORDER INFO: For level (C) above only.

9 GT 4613—Shipping weight 1 lb. \$38.99

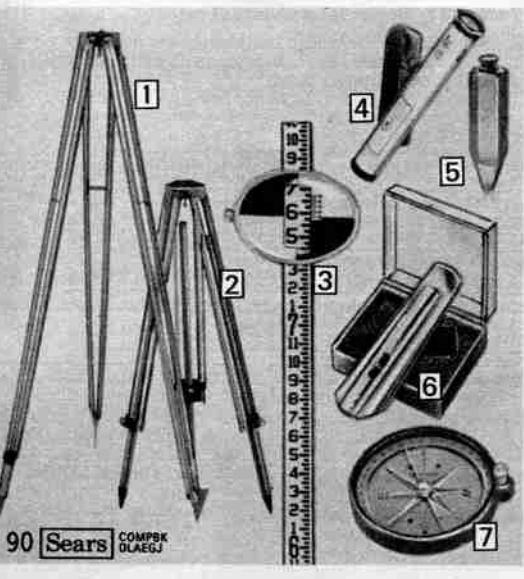

align walls, level foundations, site contours for farming and more

Here are ten reasons the levels on these two pages give you sharp, distinct, right-side-up images through years of dependable service



1 Achromatic lenses . . . precision ground, polished to exact curves for clarity



2 Telescopes precision bored to rifle-barrel accuracy . . . dust proof fittings



3 Rack-and-pinion focusing for accurate line of sight throughout range



4 Fine motion parts are precision machined to avoid backlash, side play



5 Fitted carrying case protects level from dust and moisture

6 Circles and verniers are sized to speed readings and help reduce costly errors

7 Graduations are permanently registered on metal in precise, easy-to-read divisions for fast readings

8 Dust-protected leveling screws have large knobs for easy handling . . . even with gloves on

9 Level vial mountings help your instrument hold its adjustment in the field

10 Protective finishes are hard-baked and durable for high impact and abrasion resistance



(E) Fixed-power transit level without optical plummet or lateral adjuster
\$379⁹⁵
level alone



(F) Fixed-power transit level with optical plummet and lateral adjuster
\$519⁹⁵
level alone

(E and F)
Contractors' Transit Levels
Choose zoom or fixed-power lens



(E), (F), (H) are available with tripods

(H) **Contractors' Dumpy Level**
Zoom lens brings even distant images into sharp, clear focus



\$289⁹⁵
level alone

LENS, RANGE: 18 to 34 power zoom lens . . . just turn eyepiece to change power. Ideal for shots over 125 feet or for greater accuracy at shorter distances. Focuses from 3 feet to infinity.
CALIBRATIONS: Precision-ground scope vial has sensitivity of 110 seconds per 2-mm division. Plate vial has sensitivity of 130 seconds per 2-mm division. Horizontal circle with double vernier reads directly to 5 minutes ($\frac{1}{12}^\circ$).
CONST: Die-cast aluminum telescope. Achromatic lens. Rack-and-pinion focusing. Focusing-type eyepiece. Dust-protected micrometer clamp, tangent and leveling screws. Leveling lock for stability.
ACCESSORIES: Includes carrying case with fitted foam insert, sunshade and instruction manual.

(E) **Levels without Built-in Optical Plummet or Lateral Adjuster.** Use traditional plumb bob and string (both included) to sight in and center level. Shifting center for setting over a point.
ORDER INFO: See warranty, service info., p. 90.
Zoom-lens level alone
9 GT 46194C—Shpg. wt. 14 lbs. **\$379.95**
Zoom-lens level with stiff-leg tripod (9 GT 46084C) described on opposite page. Save \$12.99. Separate prices total \$452.94.
9 GT 46245C2—Shpg. wt. 28 lbs. **\$439.95**
Fixed-power level alone. As described above but with 22 power lens.
9 GT 4619C—Shpg. wt. 14 lbs. **\$329.95**

(F) **Levels with Built-in Optical Plummet and Lateral Adjuster.** Sight thru telescope to center level . . . gives faster, more accurate centering than any other level on these 2 pages.
ORDER INFO: Warranty, service info., p. 90.
Zoom-lens level alone
9 GT 46024C—Shpg. wt. 17 lbs. **\$519.95**
Zoom-lens level with stiff-leg tripod (9 GT 46084C) described on opposite page. Save \$12.99. Separate prices total \$592.94.
9 GT 46244C2—Shpg. wt. 31 lbs. **\$579.95**
Fixed-power level alone. As described above but with 22 power lens.
9 GT 4602C—Shpg. wt. 17 lbs. **\$469.99**

(G) **Engineers' Transit with built-in compass and tripod . . . designed for professional use on commercial job sites**

LENS, RANGE: 22 power . . . for shots requiring precise leveling and angle turning. Focuses 3 feet to infinity.
CALIBRATIONS: Scope vial has sensitivity of 60 seconds per 2-mm division. Two plate vials have sensitivity of 120 seconds per 2-mm division. $5\frac{1}{2}$ -in. horizontal and 5-in. vertical circles, with double verniers, read directly to 1 minute.
CONSTRUCTION: Aircraft-type aluminum-alloy, precision-bored telescope, 10 $\frac{1}{2}$ inches long. Bronze axis journals. Achromatic lens. Rack-and-pinion focusing. Focusing-type eyepiece with cross hairs and stadia lines in fixed focus at 1:100 ratio. Dust-protected micrometer-type tangent screws with smooth, helical spring counter-motion. Dust-protected leveling screws with easy-grasp knobs.
COMPASS: Built into plate. Jeweled bearing and hardened steel pivot. $3\frac{1}{16}$ -inch needle adjusts for declination. Graduated to single degrees.
TRIPOD: Extends from 37 to 59 in. Hardwood; painted yellow and white for safety. Cast-aluminum shoes, steel points. Incl. clamps, protective cap and handy leg-binding strap.
ACCESSORIES: Includes fitted carrying case, sunshade, 12-oz. plumb bob with string, magnifier, instruction manual.
ORDER INFO: See warranty, service information on opposite page. Allow extra time for shipment from factory in Boston, Mass. Pay shipping and handling charges from your Catalog Merchandise Distribution Center. No C.O.D. orders.
F9 GT 46106—Shipping weight 31 pounds **\$749.95**




\$749⁹⁵
complete

LENS, RANGE: 20 to 36 power zoom lens . . . just turn eyepiece to change power. Ideal for shots over 125 feet or for greater accuracy at shorter distances. Focuses from 4 $\frac{1}{2}$ feet to infinity.
CALIBRATIONS: Precision-ground scope vial has sensitivity of 110 seconds per 2-mm division. Horizontal circle with double vernier reads directly to 5 minutes ($\frac{1}{12}^\circ$).
CONSTRUCTION: Die-cast aluminum, precision-bored telescope. Achromatic lens. Rack-and-pinion focusing. Focusing-type eyepiece. Dust-protected micrometer clamp, tangent and leveling screws. Forged shifting center for setting over a point.
ACCESSORIES: Includes fitted carrying case, sunshade, plumb bob with string, instruction manual.
ORDERING INFORMATION: See warranty and service information on opposite page.
Zoom-lens level alone
9 GT 46034C—Shipping weight 14 pounds . . . **\$289.95**
Zoom-lens level with stiff-leg tripod (9 GT 46084C) described on opposite page. Save \$12.99. Separate prices total \$362.94.
9 GT 46216C2—Shipping weight 28 pounds . . . **\$349.95**
Fixed-power level alone. As described above but with 25 power lens.
Shipping weight 14 pounds.
9 GT 4603C **\$249.95**
Fixed-power level with stiff-leg tripod (9 GT 46084C) described on opposite page. Save \$12.99. Separate prices total \$322.94.
Shipping weight 28 pounds.
9 GT 46217C2 **\$309.95**

CRAFTSMAN® Professional Gas Chain Saws

Our most powerful Chain Saws with extra-long guide bars
... packed with features to cut with the ease
and speed a professional woodcutter requires



• Iso-Vib Handle . . .
rubber mounts isolate
engine vibration from handles



• Friction Fighter Guide Bars
... roller bearing sprocket
eases chain around tip
of guide bar . . .
reduces heat and friction



Wrap-around
Handle for big
timber cuts



1
4.5-cu. in. engine, 23-in.
Friction Fighter Bar \$419⁹⁵

Dual oiling
system . . . fully
automatic oiler
lubricates chain dur-
ing normal use, manual
oiler for hard cutting use



2
3.5-cu. in. engine, 20-in.
Friction Fighter Bar \$339⁹⁵

Gear driven
automatic oiler



3
2.3-cu. in. engine, 16-in.
Friction Fighter Bar \$214⁹⁵

Dual oiling System

CRAFTSMAN® Electric Chain Saw



\$103⁹⁵

- Double insulated . . .
no need for grounding
- Instant start for instant cutting power
... no fuel to mix, no starter
rope for you to pull

(1 thru 3) CRAFTSMAN® Gas Chain Saws

ENGINE: 2-cycle engine with solid-state ignition. Spark arresting Sof-tone muffler. Diaphragm carburetor. Automatic rewind starter. Chrome-plated cylinder and steel rings. Solid steel 1-piece crankshaft.

GUIDE BAR: Friction Fighter sprocket nose to ease chain around bar.

HOUSING: Red and black magnesium frame. Thick rubber-covered tubular steel front handle, die-cast rear handle.

ORDERING INFORMATION: See warranty below. Instructions, bar wrench included. Bar and chain sent unattached.

(1) 4.5-cu. in. Chain Saw, 23-in. Friction Fighter guide bar Automatic and manual chain oiling. Iso-Vib handle with 5 rubber vibration isolators. Bumper spike included. 31-ounce fuel capacity. 18-ounce chain oil capacity.

CHAIN: Full $\frac{3}{8}$ -inch pitch chrome-plated chipper style.
32 GT 35871C—Shipping weight 22 pounds . . . \$419.95
32 GT 36872—Replacement 23-in. Chain for (1). Wt. 15 oz. . . 24.50
32 GT 36873C—Replacement 23-in. Guide Bar for (1). Wt. 3 lbs. 4 oz. . . 30.99

(2) 3.5-cu. in. Chain Saw, 20-in. Friction Fighter guide bar Positive gear drive automatic chain oiling. Iso-Vib handle, 4 rubber vibration isolators. Bumper spike included. 23.3-ounce fuel cap. 10.1-ounce chain oil capacity.

CHAIN: Full $\frac{3}{8}$ -inch pitch chrome-plated chipper style.
32 GT 35851C—Shipping weight 18 pounds . . . \$339.95
32 GT 36852—Replacement 20-in. Chain for (2). Wt. 13 oz. . . 21.50
32 GT 36853C—Replacement 20-in. Guide Bar for (2). Wt. 2 lbs. 10 oz. . . 26.99

(3) 2.3-cu. in. Chain Saw, 16-in. Friction Fighter guide bar Automatic and manual chain oiling. Iso-Vib handle with 4 vibration isolators. LoKick sprocket-nose guide bar. Engine oil included.

CHAIN: $\frac{3}{8}$ -in. low profile chrome-plated chisel-type cutter with LoKick guide bar, reduces incidence of kickback.
32 GT 35238—Shipping weight 14 lbs. 6 oz. . . \$214.95
32 GT 3628—Replacement 16-in. Chain for (3). Wt. 9 ounces . . 17.50
32 GT 36366—Replacement 16-in. Guide Bar for (3). Wt. 1 lb. 15 oz. . . 18.49

(A) Wrap-around Handle for (1)

For felling big timber where cuts must be made from the same side of the tree. Thick rubber covered tubular steel. Welded support mount to fit standard mounting bracket on (1). Incl. screws, bottom support bracket.

ORDERING INFORMATION: For (1) above only.
32 GT 36874—Shipping weight 2 pounds . . . \$19.99

Full 90-day warranty on Gas Chain Saws (1 and 2) (excluding bar, chain, spark plug, filter and starter rope): For 90 days from the date of purchase, when you maintain, lubricate and tune-up this chain saw according to the operating and maintenance instructions in the Owner's Manual, Sears will repair any defect in material or workmanship in this gasoline chain saw at no charge.

This warranty excludes bar, chain, spark plug, filter and starter rope which are expendable parts which become worn during normal use.

Full 90-day warranty on Gas Chain Saws (except 1 and 2) and Full 1-year warranty on Electric Chain Saws: For 90 days from date of purchase on gasoline or 1 year from date of purchase on electric chain saws, Sears will repair any defect in material or workmanship in the chain saw at no charge. If chain saw is used for commercial or rental purposes, warranty applies for only 30 days from date of purchase. Warranty service is available by contacting the nearest Sears store or Service Center throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

(4) CRAFTSMAN® Electric 2.00-HP Chain Saw, 14-in. LoKick Friction Fighter guide bar

MOTOR: 100% ball bearings. Safety lock switch.

GUIDE BAR: Friction Fighter LoKick sprocket-nose guide bar.



HOUSING: Aluminum die-cast gear housing. Thermoset polymer motor housing resists heat. Tempered steel spike bar. Vinyl-coated handle.

CHAIN: $\frac{3}{8}$ -in. low profile chrome-plated chisel-type cutter, reduces incidence of kickback. Gear drive automatic oiler, manual override.

ELECTRICAL INFORMATION: Double-insulated. UL listed. 110-120-v., 60-Hz. AC, 10 amps, 1200 watts. Includes 10-inch, 2 wire cord.

ORDERING INFORMATION: See one-year warranty above. Instructions, bar wrench included. Bar and chain sent unattached. Actual weight 12 lbs.
32 GT 3418—Shipping weight 15 pounds . . . \$103.95
32 GT 3613—Replacement Chain for (4) above. Shpg. wt. 8 oz. . . 16.50

Save on cost of expensive lumberyard stock by cutting your own—here's how:

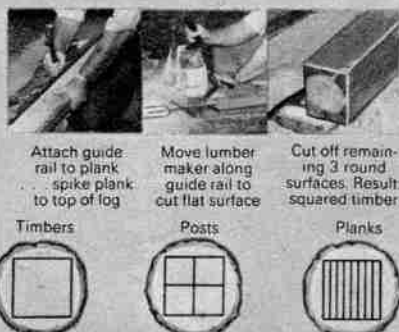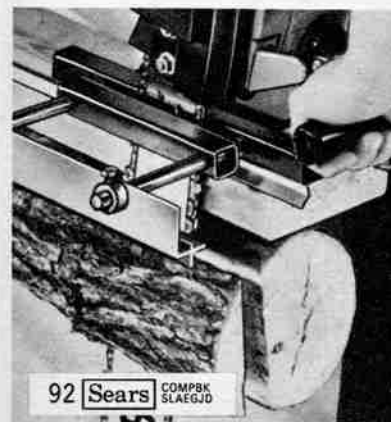

Attach guide rail to plank
spike plank to top of log

Move lumber maker along guide rail to cut flat surface

Cut off remaining 3 round surfaces. Result: squared timber



Compact Lumber Maker lets you cut your own rough-sawn planks and timber

\$49⁹⁵ chain saw not included

HOW IT WORKS: First, attach guide rail to a level plank up to 12 feet long. (plank not included). Spike plank to top of log, make first cut, spike plank to newly cut log surface for second cut . . . continue process until you have turned log into a square timber from which you can cut square lumber, beams, posts, or planks as thin as $\frac{1}{2}$ -inch.

ORDERING INFORMATION: Clamps to any chain saw guide bar up to 30 inches long . . . no holes to drill . . . releases saw in seconds for normal cutting. Attachment reduces guide bar cutting length by 2 inches plus plank thickness. Includes metal clamp and bracket assembly, handle with plastic grip, metal guide rails in 2-foot sections for straight cuts. Extra rails available to cut planks longer than 12 feet. Ordering information for extra rails included with easy to follow instructions. Unassembled. Not recommended for Barracuda chain.

32 GT 36815—Shipping weight 8 pounds 4 ounces . . . \$49.95

Sharpening Accessories to help keep your chain cutting fast

A sharpened chain cuts through wood so much faster than a dull chain... that means less wear on saw engine, less work for you

CRAFTSMAN® Electric Chain Saw Sharpener

Choose 110-120-volt AC model for the workshop or 12-volt DC model for sharpening in the field... takes as little as 5 minutes to completely sharpen chain

\$48.95 12-volt DC model

HOW IT WORKS: Place sharpening stone into cutter gullet. Grinding angle guide plate holds stone at correct height and angle. Hones chains from 1/4-in. pitch thru .404-in. pitch.

CONST: Die-cast aluminum housing. All ball bearing construction. Stamped metal guide plate. 3 3/8 x 10 7/8 in. long. 12-volt unit will plug into auto cigarette lighter or clamp onto battery terminals. Also incl.: pocket accessory case, 3 stones (1/32, 1/16, 1/32), 2 shims, wrench, depth gauge, hanger for easy storage.

(1) 120-volt AC Sharpener

24,000-rpm motor. ELECTRICAL INFORMATION: 8-ft., 3-wire cord. 110-120-volt, 60-Hz. AC. 240 watts, 2 amps. UL listed. ORDER INFO: Wt. 3 lbs. 10 oz. 32 GT 36571 \$43.95

(2) 12-volt DC Sharpener

20,000-rpm motor. Lighter plug, battery clips incl. for in-the-field sharpening. ELECTRICAL INFORMATION: 10-ft. cord, 72 watts, 6 amps. ORDER INFO: Wt. 3 lbs. 6 oz. 32 GT 36572 \$48.95

Replacement Stones (not shown). For above sharpeners. Package of two.

Size	Catalog Number	Shipping weight	Package
1/32 inch	32 GT 36581	1 ounce	\$2.29
1/16 inch	32 GT 36582	1 ounce	2.29
1/32 inch	32 GT 36583	1 ounce	2.29

(3) CRAFTSMAN® Clamp-on Hand Chain Sharpener


Fits all chain saws, will file more accurately than hand-held files. Easily clamps onto bar with all angles positively set... gives entire chain precision cut, depth-gauge filing.

CONSTRUCTION: Made of die-cast aluminum. Includes depth gauge file for all chains.

ORDERING INFORMATION: Order round file (5) separately (sold below) to fit your chain.

32 GT 36508—Wt. 1 lb. 4 oz., \$14.95

\$14.95



A sharpened chain gives you faster cutting speed

Hand-held Files and Filing Guides

(4) Depth-Gauge Filing Guide

Double-ended. Fits 1/4-in. thru .404-in. pitch chain. .025-in. on one end, .030-in. on other. Made of hardened steel.

ORD. INFO: Wt. 2 oz. 32 GT 36557 \$1.89

(5) Round Files for (6).

Package of 2.

ORDERING INFORMATION:

Diam. in.	Catalog Number	Wt. oz.	Price Pkg.
1/32	32 GT 36524	2	\$2.99
1/16	32 GT 36525	2	2.99
1/32	32 GT 36526	3	2.99

(6) File and Guide

1/32-in. diam. Fits all gas, electric chain saws incl. CRAFTSMAN saws with 1/4, 3/8-in. pitch low profile chisel. Barracuda chain.

1/16-in. diameter. Fits CRAFTSMAN and all other gas and electric chain saws with .325 pitch chains.

1/32-in. diameter. Fits CRAFTSMAN and all other gas, electric chain saws with full 3/8-in. pitch chain. Also fits saws with .325 pitch Barracuda chain.

ORDERING INFORMATION:

Diam. in.	Catalog Number	Shpg. wt.	Price Pkg.
1/32	32 GT 36516	6 oz.	\$4.89
1/16	32 GT 36501	6 oz.	4.89
1/32	32 GT 36502	9 oz.	4.89

Sharpening Accessories

(7) Break-n-Mend Tool. 2000-pound grip handle locks onto chain. Fits all chains up to 3/8-inch pitch. Punches rivet out, spins old or new rivet into place.

32 GT 36617—Shipping weight 1 pound 8 ounces \$15.95

(8) Slide-on Chain Guard. Rigid black plastic. Resists dirt and built-up grit... helps protect chain and fingers. Wt. 5 oz.

For guide bar to 16 in. long. 32 GT 36513 \$1.89

For guide bar up to 18 in. 32 GT 36512 \$1.89

Replacement Chains by Oregon

Sears sells replacement chains to fit 20 popular name chain saws: CRAFTSMAN®, Homelite, McCulloch and others. In all, we have chains to fit 158 models. If the chain you need isn't listed here, see our Big Book for a complete selection of chains and chain saw accessories.

ORDER INFO: Check saws model number, bar length, chain pitch, drive link count.

Brand	Model	Bar Lgth. (in.)	Chain Pitch	No. of Drive Links	Catalog Number	Shpg. wt. lbs. oz.	Price for one
Dayton	2Z573 CS351	14 1/4	3/8 LP	76	32GT3605	8	\$14.50
		14 1/4	3/8 LP	53	32GT3613	8	16.50
		16 3/8	3/8 LP	57	32GT3628	9	17.50
Echo	CS451VL, CS601, CS602VL, CS452VL, CS701, CS702	16 3/8	3/8	59	32GT3616	12	19.50
		20 3/8	3/8	69	32GT3620	14	23.50
Frontier	All	14 1/4	3/8	72	32GT3653	8	14.50
Homelite	Super 2 (After Serial Number 5042001)	12 3/4 LP	3/8	48	32GT3611	8	12.50
	XL12-Super XL Auto, XL-400 thru XL-924	14 3/4 LP	3/8	53	32GT3613	8	16.50
	EZ series, 150, XL-100	16 3/8	3/8	59	32GT3616	12	19.50
		16 3/8	3/8	60	32GT3654	12	16.50
Husqvarna	22, 35, 35VR	14 1/4	3/8	72	32GT3653	8	14.50
	Husky Jr. 121	14 1/4	3/8	76	32GT3605	8	14.50
Jonsereds	36	14 1/4	3/8	72	32GT3653	8	14.50
Lombard	CS-2600, CS-2700, CS-2800, CS-2900	14 1/4	3/8	72	32GT3653	8	14.50
	Comango, Lightning 1 thru V	16 3/8	3/8	59	32GT3616	12	19.50
McCulloch	Mini Mac 35	14 3/8 LP	3/8	49	32GT3657	8	11.50
	SP40, Power Mac 6A (sprocket nose bar only)	14 1/4	3/8	72	32GT3653	8	14.50
	Power Mac 6, Pro 10-10A	16 3/8	3/8	60	32GT3654	12	16.50
Montgomery Ward	24016, 24005, 24008, 24024, 24025, 24032, 24034, 24035	14 1/4	3/8	72	32GT3653	8	14.50
		15 1/4	3/8	76	32GT3605	8	14.50
Partner	Mini P	14 1/4	3/8	72	32GT3653	8	14.50
	Mini P II	14 3/8 LP	3/8	53	32GT3613	8	16.50
		16 3/8 LP	3/8	57	32GT3628	9	17.50
Pioneer	P10	14 3/8 LP	3/8	53	32GT3613	8	16.50
		16 3/8 LP	3/8	57	32GT3628	9	17.50
Poulan	XX (Before Serial Number 20287653)	14 1/4	3/8	76	32GT3605	8	14.50
	XX (After Serial Number 20287653)	14 3/8 LP	3/8	53	32GT3613	8	16.50
	XXV	14 1/4	3/8	76	32GT3605	8	14.50
	451, 4200, 360	16 3/8	3/8	59	32GT3616	12	19.50
Remington	Electric Saws without "C" Prefix on Serial Number Same Models As Above with "C" Prefix on Serial Number; plus models 100, 200, 300, 400	14 1/4	3/8	72	32GT3653	8	14.50
		14 3/8 LP	3/8	49	32GT3657	8	11.50
Sears Craftsman®	3460, 3411, 34071	12 3/4 LP	3/8	48	32GT3611	8	12.50
	35084, 35085, 35224, 35824	14 1/4	3/8	76	32GT3605	8	14.50
	35086, 35087, 35088, 35233	14 1/4	3/8	76	32GT3606	10	23.50
	3465, 3408, 35211, 35094, 35251	14 3/8 LP	3/8	53	32GT3613	8	16.50
	35215, 35095	14 3/8 LP	3/8	53	32GT3624	9	21.50
	35371, 35147, 35177, 35187	17 1/2	3/8	71	32GT36217	12	22.50
	35375, 35138, 35148, 35178, 35197	17 1/2	3/8	71	32GT36212	13	26.50
	35826	16 3/8	3/8	59	32GT3616	12	19.50
	35829, 35361	20 3/8	3/8	69	32GT3620	14	23.50
	35255	15 3/8 LP	3/8	57	32GT3628	9	17.50
Skil	1610, 1712, 1601 Electric	12 3/8 LP	3/8	45	32GT3623	7	12.50
	1631, 1645	16 3/8	3/8	60	32GT3654	12	16.50
Stihl	015, 020, 020P	14 1/4	3/8	72	32GT3653	8	14.50
	030, 031AV	16 3/8	3/8	60	32GT3654	12	16.50
Village Blacksmith	Type I	12 3/8 LP	3/8	48	32GT3611	8	12.50
Wen	1200 Type I	14 3/8 LP	3/8	53	32GT3613	8	16.50
Wizard (Western Auto)	Cat 14	14 3/8 LP	3/8	49	32GT3657	8	11.50
Wright	121, 122A	14 1/4	3/8	76	32GT3605	8	14.50
	111-(Before Serial Number 20287653)	14 1/4	3/8	76	32GT3605	8	14.50
	111-(After Serial Number 20287653)	14 3/8 LP	3/8	53	32GT3613	8	16.50

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Replacement Guide Bars

ORDERING INFORMATION: Check model number and guide bar length.

Bar type	Bar lgth.	Bar tip type	For saw models	Catalog Number	Shpg. wt. lbs. oz.	Price
Solid Steel.....	14 in.	Sprocket	For all 1/4" pitch chains	32GT36394	2	\$22.99
Laminated Steel.....	10 in.	Non-armored	35201, 35202	32GT36363	1	9.49
	12 in.	Sprocket	35206, 36505 35093	32GT36364	1	12.49
	14 in.	Sprocket	For all 3/8" low profile chains	32GT36365	2	15.49
	15 in.	Sprocket	35255	32GT36351	1	15.23.49
	16 in.	Sprocket	35232, 35235 35096, 35238	32GT36366	1	15.18.49
	16 in.	Sprocket	36256	32GT36368	1	15.18.49
	17 in.	Sprocket	35177, 35178 35147, 35148 35171-35875	32GT36361	2	24.95
	18 in.	Sprocket	35372-35376	32GT36367	2	24.49
	20 in.	Sprocket	35851	32GT36853C	2	10.26.99
	23 in.	Sprocket	35871	32GT36873C	3	4.30.99

High-pressure Washers

Deliver up to 2 gal. per min. at up to 700 lbs. per sq. in. pressure to strip away dirt



Our most powerful unit delivers two gallons per minute at 700 PSI pressure
\$469⁹⁵

Delivers 1.8 gallons per minute at 500 PSI pressure
\$299⁹⁵

Delivers 2 gals. per min. at 550 PSI pressure
\$419⁰⁰

HOW TO USE: Attach garden hose to unit, place suction hose into 1 gal. chemical container (not included), plug into 120-volt AC outlet and you're ready to clean. Use low pressure to apply chemical cleaner, high pressure for pre-wash and final rinse. **DIMENSIONS:** 21x15x15 in. high (except (1); 21x15x24 inches high).

CONSTRUCTION: Tubular steel handles. High-impact plastic body mounted on steel frame. 1 1/2x6-in. semi-pneumatic tires. Thermal overload protector protects motor from burnout. Unloader valve (except (3)) to stabilize internal pressure. 25-ft. neoprene hose (except (3)); 20-ft. hose).

PUMP: Cast iron. Stainless steel valves. Rubber piston cups. Replaceable cylinder sleeves. Cleaning solution bypasses pump to protect parts.

ELECTRICAL INFORMATION: 110-120-v., 60 Hz AC. UL listed. On/off switch. 8-ft., 3-wire cord.

SPECS., ORDER INFO: Compare washers in chart. Wheels, hoses sent unattached. On item (1) pay motor carrier charges from factory near Sioux City, Iowa. Allow extra time. Please No C.O.D.'s Items (2) and (3), see "N" suffix p. 69.

(1) **1-HP High-pressure Washer**
F32 GT 44688N—Shpg. wt. 60 lbs. **\$469.95**

(2) **3/4-HP High-pressure Washer**
32 GT 44626N—Shpg. wt. 55 lbs. **\$419.00**

(3) **1/2-HP High-pressure Washer**
32 GT 44622N—Shpg. wt. 52 lbs. **\$299.95**

Type nozzle	Motor HP	Discharge Rate		Watts used
		PSI	GPM	
(1) Adjust. 4-way 0°, 15°, 40°, and low pressure	1	700 (lbs. per sq. in. pressure)	2 (gal. per min.)	1150
(2) Adjust. 4-way 0°, 15°, 40°, and low pressure	3/4	550 (lbs. per sq. in. pressure)	2 (gal. per min.)	1150
(3) Adjust. 2-way high/low pressure	1/2	500 (lbs. per sq. in. pressure)	1.8 (gal. per min.)	900

Detergent for washers (1 thru 3)

Just set reusable container in washer unit, attach suction hose... no mixing required. For all-purpose cleaning.


ORDERING INFORMATION:

1-gallon plastic bottle.

Shipping weight 9 lbs.

32 GT 44611 Bottle \$7.19

Power Plants run power tools most anywhere

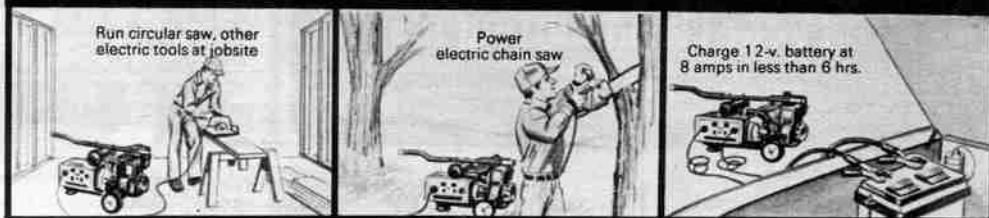

CRAFTSMAN® Dual-voltage, long-run Power Plants with auxiliary fuel and oil for up to 24 hrs. service, depending on load

Flip this switch on 3000 and 3750-watt units to send full capacity to a single outlet and use 2 power tools on only 1 extension cord—a feature most comparable units lack. Switch full power to one outlet... plug male end of extension cord into power plant, join 2 power tools at the female end of extension cord and you're underway.



Oil level sensor, replenishing pump shuts-off engine when oil's low

3000-w. 7-HP manual start **\$729⁰⁰**

3750-w. 8-HP electric start **\$969⁰⁰**

4500-w. 10-HP electric start **\$1069⁰⁰**

Choose from 3 CRAFTSMAN® long-run, dual-voltage Power Plants to suit your needs.

ENGINE: Aluminum. Air-cooled Craftsman®. 4 cycles, 3600 rpm. 3750 and 4500-watt units with cast-iron cylinder sleeves. Over-sized, spark-arrest muffler. Electric start with recoil backup on 3750-watt and 4500-watt units. Require 12-volt battery. Recoil start only on 3000-w.

ELEC. INFO: 25% surge capacity, built-in overload protector. Battery charger (cables incl.) for up to 8 amps DC power for 12-v. battery. Voltage regulation to ±2% at 60-c. Skewed stator.

CONSTRUCTION: Steel and aluminum. Spring dampeners. 2 handles. 1 gallon main tank, 5-gallon auxiliary fuel tank. Fuel pump, tank selector valve. Couplers and hoses. Automatic oil replenish system maintains oil level... shuts off when reserve gets low. Measures 29x17 1/2x17 inches high.

CONTROLS: Three 120-v. outlets, one locking-type with 3-prong male adapter; one locking-type 240-v. outlet with 4-prong male adapter. Full-capacity switch on 3000 and 3750-watt units. Control panel light goes out to warn of overload. Charger terminals on 3000-w. unit only. Easy-access start and stop switch.

ORDERING INFO: See how to determine right plant size below. See warranty below. **NOTE: Do not use power plants in closed rooms or compartments.**

3000-w./3750-w. surge capacity. 7-HP recoil start. 32 GT 32506N—Shpg. wt. 171 lbs. **\$729.00**

3750-watt/4688-watt surge capacity. 8-HP electric start.

32 GT 32507N—Shpg. wt. 193 lbs. **\$969.00**

4500-watt/5625-watt surge capacity. 10-HP electric start.

32 GT 32505N—Shpg. wt. 200 lbs. **\$1069.00**

(4 and 5) **Single-voltage Power Plants give nearly 2 hours of steady power without refueling.**

ENGINE: Aluminum. Air-cooled Craftsman® engine. 4 cycles, 3600 rpm. Spark-arrest muffler meets U. S. Forestry Service Standard 5100-1a for spark-arresting efficiency. Recoil start with compression release.

ELECTRIC INFO: Two 120-v. outlets, 60-c. AC. 25% surge cap. Voltage regulation on (4); ±2%, on (5); ±5%. Built-in overload protection.

CONSTRUCTION: Lightweight steel and aluminum. Spring vibration dampeners for reduced noise. Dual-grip carrying handle. Power plants run approximately 2 hours on a full tank of fuel, depending on load.

CONTROLS: Panel with built-in battery charger and overload warning light on (4). Individually operated and located controls on (5).

ORDER INFO: Order power plants from chart below. See how to determine right size power plant below. See warranty below.

NOTE: Do not use power plants in closed rooms, compartments.

10-12-26 Not for use power plants, closed rooms, compartments.														
Item	Voltage	Wattage		HP at 3600 rpm	Type Starter	Gas Tank Capacity	Outlets 120-v.	Dimen.-inches			Actual weight	Catalog Number	Shpg. wt.	Price
		Rated	Surge					L	W	H				
(4) Single	2200-w.	2750-w.	5-HP	Manual	1 gal.	2	23½	18	16	102 lbs.	32GT32049N	117 lbs.	\$484.95	
(4) Single	1800-w.	2250-w.	4-HP	Manual	2 qt.	2	21	15	17	70 lbs.	32GT32052N	80 lbs.	364.95	
(5) Single	2600-w.	3250-w.	6-HP	Manual	1 gal.	2	27	17	15	96 lbs.	32GT32407N	116 lbs.	419.95	
(5) Single	1800-w.	2250-w.	4-HP	Manual	2 qt.	2	21	15	17	64 lbs.	32GT32406N	76 lbs.	284.95	

How to determine the right size power plant for your needs

To determine the size of power plant, first decide which electrical equipment is to be kept running. This may include your entire electrical load, or you may have certain heavy loads that may be omitted. Order correct size to suit your power needs.

(A) List the starting watts for all automatic and manually started tools that will be turned on and left on while other units are running. (Starting watts are higher than running watts, after starting, motors use less wattage.)

(B) Add running watts for lights, heating units and tools to be used at once.

(C) Add total starting and total running watts needed.

(D) Order power plant 25% larger (multiply the wattage you got in step (C) by 1.25) to allow for extra equipment.

NOTE: Most tools, appliances show wattage on label (if volts and amps are given, multiply volts x amps to get wattage.)

	Run at once	1800 w.	2200 w.	2600 w.	3000 w.	3750 w.	4500 w.
1/2-HP furnace fan	x	x	x	x	x	x	
House lights	x	x	x	x	x	x	
Refrigerator	x	x	x	x	x	x	
1/2-HP sump pump		x	x	x	x	x	
Freezer			x	x	x	x	
TV				x	x	x	
Automatic Washer					x	x	
Electric stove (1 element)							x

FULL 1-YEAR WARRANTY FOR POWER PLANTS (ALTERNATORS): For 1 year from date of purchase, Sears will repair any defect in material or workmanship in power plant at no charge. If power plant is used for commercial or rental purposes, this warranty applies for only 30 days from date of purchase. Warranty service is available by contacting nearest Sears store or Service Center in the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CRAFTSMAN® Material Handling Trucks

Let you move or haul big or small loads from 300 to 4500 pounds



Steel Shelf Truck
\$54⁹⁹
500-lb. capacity

Heavy-duty Pallet Truck with hydraulic lift

4500-pound capacity \$399⁰⁰

Wheel Brake for Pallet Truck (4) \$65⁰⁰

Platform Truck tubular steel handle
1500-pound capacity \$149⁹⁹

(1) Steel Shelf Truck 500-lb. capacity

SIZE: 32 in. high, 18 in. wide, 35 in. long. Two trays, each 16x30 in. long; 19-in. clearance between shelves.

CONSTRUCTION: Angle-steel frame, shelves welded into 1 solid unit. Two 3-in. deep formed trays with rolled edges for added strength. Top tray is reversible. Tubular handle, enamel finish. Mounting hardware provided.

WHEELS: 5-in. rubber casters, 2 rigid and 2 swivel.

ORDER INFO: Unassembled.

Shipping weight 35 lbs.

9 GT 87264C \$54.99

500-pound capacity Truck

Like shelf truck shown above, except trays are 24x30 in. long. Overall, 26x35 in. long.

ORDERING INFORMATION: See "N" suffix, p. 69.

Shipping weight 52 lbs.

9 GT 87265N \$64.99

(2) Platform Truck

2000-lb. capacity in 2 sizes.

CONSTRUCTION: 1½-in. hardwood deck. Tubular-steel handle. Enamel finish. Sanded and natural varnished deck. Rubber bumpers on pushbar and open platform end.

WHEELS: Bolted through crossboards and deck. 8x2-in. wheels (2 swivel and 2 rigid casters).

CAPACITY, SIZES, ORDER INFO: Shpg. note right.

24x48-in. deck. Shpg. wt. 115 lbs.

F9 GT 87266N \$189.99

30x60-in. deck. Shpg. wt. 145 lbs.

F9 GT 87267N \$199.99

(3) Platform Truck

1500 or 2000-lb. capacity, each in 2 sizes.

CONSTRUCTION: 1500-lb. has 1-in. thick hardwood; 2000-lb. has 1½-in. both kiln-dried. Reinforced beneath hardwood crossboards. Tubular-steel handle, enamel finish.

WHEELS: Bolted through crossboards and deck. CAPACITY, ORDERING INFO: See Shpg. note below. 1500-lb. trucks have 6x2-in. wheels, 9¼-in. deck height; 2000-lb. trucks have 8x2-in. wheels, 11½-in. deck height.

Catalog Number	Capacity	Width	Length	Shpg. wt.	Price
F9GT87231N	1500 lbs.	24 in.	48 in.	85 lbs.	\$149.99
F9GT87232N	1500 lbs.	30 in.	60 in.	120 lbs.	159.99
F9GT87233N	2000 lbs.	24 in.	48 in.	115 lbs.	159.99
F9GT87234N	2000 lbs.	30 in.	60 in.	150 lbs.	179.99

(4) Heavy-duty Pallet Truck. Pallet truck can handle loads up to 4500 lbs., the largest moving capacity of any truck we sell.

CONST: 1-piece, all-steel hydraulic unit with overload valve to prevent exceeding capacity. Full 200° turning radius for maneuvering ease. 3-position foot pedal. (See wheel brake below).

WHEELS: Two 8x2-in. double-base wheels and 3¼x4-in. fork-load rollers are of polyurethane.

SIZES, ORDERING INFO: See Shpg. note below.

Catalog Number	Fork Length	Truck Width	Wt. lbs.	Price
F9 GT 87256N	32 in.	27 in.	283	\$399.00
F9 GT 87257N	36 in.	17½ in.	241	399.00
F9 GT 87258N	36 in.	20½ in.	265	399.00
F9 GT 87259N	36 in.	27 in.	290	399.00
F9 GT 87260N	42 in.	17½ in.	248	399.00
F9 GT 87261N	42 in.	20½ in.	272	399.00
F9 GT 87262N	42 in.	27 in.	297	399.00
F9 GT 87263N	48 in.	17½ in.	256	399.00
F9 GT 87264N	48 in.	20½ in.	280	399.00
F9 GT 87265N	48 in.	27 in.	304	399.00

(5) Wheel Brake for (4) above. Steel. Handle in down position stops load. Hardware.

ORDER INFORMATION: See Shpg. note below.

F9 GT 87207—Shpg. wt. 9 lbs. \$65.00

(6) 300-lb. capacity

SIZE: 46½ in. high, 14 in. wide. Nose is 8 in. deep.

CONSTRUCTION: Tubular-steel frame. Stair-riser slides. Enamel finish.

WHEELS: 8x1.75-in. Ball bearings.

ORDER INFO: See "N" suffix, page 69.

Shipping weight 26 lbs.

9 GT 87216N \$32.50

(7) 400-lb. capacity with convertible handle. Use as upright truck or convert to 4-wheel cart for bulky loads.

SIZE: 47½ in. high, 14 in. deep. Nose is 8 in. deep.

CONSTRUCTION: 1¼ and 1-inch tubular-steel frame. Stair-riser slides. Wheel guards. Enamel finish.

WHEELS: Heavy-duty 3x¾-in. swivel casters. Two 8x1.75-in. rubber tires.

ORDER INFO: See "N" suffix, page 69.

9 GT 87218N—Wt. 38 lbs. \$48.50

(8) 500-lb. capacity

SIZE: 50 in. high, 21 in. wide. Nose is 8 in. deep, 14 in. wide.

CONSTRUCTION: Tubular-steel frame. Vertical handle with curved bar helps improve leverage. Stair-riser slides. Wheel guards. Enamel finish.

WHEELS: 10x2.75-in. rubber tires.

ORDER INFO: See "N" suffix, pg. 69.

9 GT 87217N—Wt. 46 lbs. \$44.50

(9) 500-lb. capacity with nose plate

Plate holds 200-lb. load when down.

SIZE: 50-in. high, 21 in. wide. Nose is 14 in. wide, 8 in. deep.

CONSTRUCTION: 1-in. tubular-steel frame. 24-in. steel nose plate extension folds down. Wheel guards. Enamel finish. WHEELS: 10x2¼-in. semi-pneumatic. 5/8 diameter axle.

ORDERING INFO: See "T" note, page 14.

T9 GT 87262N—Wt. 52 lbs. \$54.99

(10) 800-lb. capacity . . . our most rugged upright hand truck

SIZE: 52 in. high, 22 in. wide. Nose is 6½ in. deep.

CONST: Steel, strapped hardwood frame. Straight crossbars. Wheel guards.

WHEELS: 8x2-in. rubber tires.

ORDER INFO: See Shpg. note left.

F9 GT 87212N—Wt. 60 lbs. \$129.99

Truck Similar to (10) above except with curved crossbars for barrels, cylinders.

ORDER INFO: See Shpg. note left.

F9 GT 87213N—Wt. 60 lbs. \$139.99

(11) Universal Appliance Truck . . . 700-lb. capacity

SIZE: 60-in. high, 16 in. wide. Nose is 24 in. wide, 5 in. deep.

CONSTRUCTION: Tubular-steel frame. Extruded rubber bumper on front plus felt-padded curved crossbars for complete protection. Appliance ratchet with web belt; belt-type stair climbers, for easy maneuvering. Enamel finish.

WHEELS: 6x2-inch rubber tires.

ORDERING INFORMATION: "T" shipping note page 14.

T9 GT 87261N—Wt. 56 lbs. \$129.99

\$59⁹⁹



CRAFTSMAN® Contractor Wheelbarrow

LOAD CAPACITY: Holds 5 cubic feet.

TRAY, HANDLE: Folded watertight 38x25x13-in. deep steel tray. Baked automotive finish. Steel brace interlocked with channel steel legs. Varnished hardwood handles. Tray supports.

TIRE, WHEEL: 16x4-in. diameter pneumatic wheel, self-lubricating bearings.

ORDERING INFORMATION: Unassembled. See "N" Shpg. note, page 69.

9 GT 87187N2—Shpg. wt. 58 lbs. \$59.99

(12-14) Heavy-duty Casters.

For office, industrial use.

CONST: Flat-top plate with zinc-plated finish resists rust. Baco® soft rubber tread on hard rubber core for quiet movement on hard, smooth floors. Atlaste® hard-rubber tread on hard-rubber core for shock-resistant performance on carpet and hard, smooth floors. Biron® powered-iron wheels for performance on rough or chip-littered floors. Semi-steel wheel for performance on wood or chip-littered floors.

CAPACITIES AND ORDERING INFORMATION: Load capacities listed pertain to maximum load per caster when in motion. When load is motionless, weight capacities are doubled. See "T" Shipping note on page 14.

Item	Load Cap. lbs.	Tread width in.	Ball Bearing Type	Rigid			Swivel		
				Catalog Number	Wt. lbs. oz.	Price Each	Catalog Number	Wt. lbs. oz.	Price Each
3-in. diameter wheel; caster height 3 1/4 in. Swivel caster radius 2 1/2 in.									
(12) Baco	125	1	self-lube	T9GT74469	1	6.93	T9GT74473	1	\$3.69
(12) Atlaste	210	1	self-lube	T9GT74471	1	8.32	T9GT74474	1	3.69
(13) Biron	250	1	plain*	T9GT74472	2	1.32	T9GT74475	2	3.69
4-in. diameter wheel; caster height 5 in. Swivel caster radius 3 1/2 in.									
(12) Baco	200	1 1/2	self-lube	T9GT74476	2	9.58	T9GT74479	3	\$6.99
(12) Atlaste	300	1 1/2	self-lube	T9GT74477	2	12.58	T9GT74481	3	6.99
(14) Semi-steel	350	1 1/2	plain*	T9GT74478	3	10.62	T9GT74482	4	7.39

*Wheel serves as its own bearing material

(15) Castor Dolly


CONSTRUCTION: Three 1¼-inch diameter non-marking wheels are non-slipping, durable red vinyl on steel recessed plate. Three rubber pads absorb shocks and protect load. Keep flat-bottomed loads from slipping. Pkg. of 2.

ORDERING INFO:


Wt. 2 lbs. 2 oz.

9 GT 7421 . . . \$5.87

Heavy-duty Casters



COMPBK DAGEJL Sears 95



Stationary Electric Air Compressors

Choose from ½-HP to 5-HP models... air tanks and safety valves meet ASME† code

Two-stage Stationary Air Compressor
is designed for permanent commercial installation
... delivers a higher pressure, up to 175 PSI**,
and has higher air storage capacity
than our single stage air compressors

Vertical models let you use a 5-HP stationary air compressor in areas where a horizontal unit with the same size tank might not fit

The large cylinder in the compressor pump compresses air to approximately 40 PSI** (first stage), sends air through cooling fins and then into the small cylinder which compresses the air to 175 PSI** (second stage) and into the storage tank.

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Horizontal model is ideal for areas where space is not a major problem

5-HP size in horizontal or vertical model... low as

\$1079⁹⁹

5-HP three-phase

Built with the stamina for garage or industrial use to run hydraulic lifts or operate any air tool (see air tools on pages 102 thru 105).

DELIVERY RATES: "Delivered air SCFM*" in chart means air delivered, not displaced at 175 PSI**. Gives higher SCFM when operating at a lower PSI.

AIR STORAGE TANKS: Pressure gauge and safety valve meet ASME† code.

COMPRESSOR, MOTOR: Two stage compressor pump consists of two different size cylinders. Larger cylinder compresses intake air to approximately 40 PSI** (first stage). Compressed air is discharged through cooling fins to dissipate heat and then into smaller cylinder which compresses air to 175 PSI** (second stage) and into the storage tank. Centrifugal starter for load-free starts. Relief and check valve. Fan-bladed flywheel, positive controlled lubrication and enclosed crankcase. Protective belt and pulley guard.

ELECTRICAL INFO: See volts, watts in chart at right. Consult your local contractor for recommended wiring, electrical codes and to order magnetic starter.

ORDERING INFORMATION: See Warranty on opposite page.

IMPORTANT NOTE: 5-HP units 30 GT 17315, 30 GT 17335 operate on 220-240-v. (convertible to 460-v.) 3-PHASE 60-Hz. AC. Check with local power company to be certain proper electrical power is available before ordering unit.

(1) Compressors with horizontal air tanks

HP	Catalog Number	Delivered air SCFM*	Tank size, gallons	Watts at maximum pressure	Size L x W x H, inches	Shipping weight, pounds	Price
1 PHASE 60-Hertz AC: Unit operates on 220-240-volts.							
5	30 GT 17316N	17.0	80	6000	64 x 23 x 43½	520	\$1249.99
3-PHASE: see important note below before ordering this unit							
5	30 GT 17315N	17.0	80	6000	64 x 23 x 43½	510	\$1079.99

(2) Compressors with vertical air tanks

HP	Catalog Number	Delivered air SCFM*	Tank size, gallons	Watts at max. pressure	Size L x W x H, inches	Shipping weight, pounds	Price
1 PHASE 60-Hertz AC: Unit operates on 220-240-volts.							
5	30 GT 17336N	17.0	80	6000	33 x 17½ x 67¾	530	\$1249.99
3-PHASE: see important note below before ordering this unit							
5	30 GT 17335N	17.0	80	6000	33 x 17½ x 67¾	530	\$1079.99

*SCFM = Standard Cubic Feet per Minute **PSI = Pounds per Square Inch †ASME = American Society of Mechanical Engineers


FULL ONE YEAR WARRANTY ON STATIONARY AIR COMPRESSORS: If any Stationary Air Compressor fails due to a defect in material or workmanship within one year from date of purchase, return it to the nearest Sears store throughout the United States and Sears will repair it, free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

**Sears Has a Credit Plan
to Suit Most Every Need**

See Big Book or ask for details

(3) Single-stage Stationary Air Compressor is designed for permanent installations requiring large air storage capacity and high air pressure . . . delivers up to 125 PSI**

In sizes from 1/2-HP to 5-HP

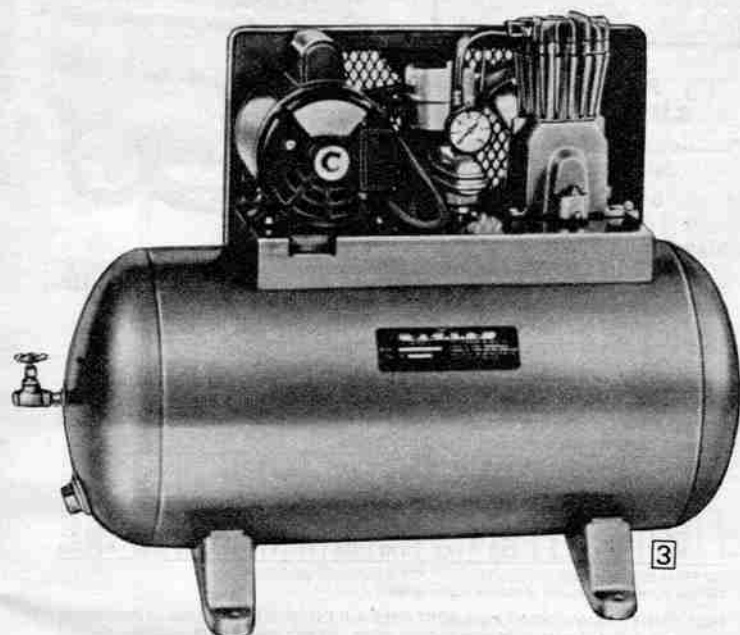

Low
as **\$299.99** 1/2-HP

These powerful stationary air compressors are designed to be permanently installed in shop, service station or factory.

DELIVERY RATES: See chart below. Maximum pressure is 125 PSI**.

AIR STORAGE TANKS: Pressure gauge and safety valve meet ASME† code. All models have 30-gallon tanks, except the 1/2-HP model, which has a 20-gallon tank.

COMPRESSOR, MOTOR: Automatic switch starts pump load-free. Relief, check valves; fan-bladed flywheel. Overload protector. Protective belt, pulley guard.

ELECTRICAL INFO: See volts and watts in chart below. 6-ft. 3-wire cord.

SIZES AND ORDERING INFORMATION: See Warranty above left.

HP	Catalog Number	Number of Cylinders	SCFM* at 40 PSI**	SCFM* at 90 PSI**	Watts at maximum pressure	Size, LxWxH, inches	Shpg. wt., lbs.	Price
This unit operates on 110-120-volts, 60-Hertz AC, 1 PHASE								
1/2	30 GT 17012N	1	3.0	2.4	1400	31 x 19 1/2 x 27	129	\$299.99
This unit operates on 110-120 or 220-240-volts, 60-Hertz AC, 1 PHASE								
1	30 GT 17051N	2	5.3	4.5	2400	37 1/4 x 17 1/4 x 33	199	369.99
These units operate on 220-240-volts, 60-Hertz AC, 1 PHASE								
2	30 GT 17081N	2	8.3	6.9	2700	37 1/4 x 17 1/4 x 33	200	469.99
3	30 GT 17091N	2	9.4	7.9	2900	37 1/4 x 17 1/4 x 33	200	499.99
5	30 GT 17111N	2	11.3	10.0	3600	39 x 20 x 37	200	599.99

*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch

†ASME=American Society of Mechanical Engineers

YOU CAN DO IT

. . . with Sears Stationary Electric Air compressors, air tools and accessories available on following pages. These permanently installed air compressors are precision-built for heavy-duty commercial and industrial use. Use on the farm with a sandblaster to remove rust from farm implements. They can be installed in a garage to

operate air tools for tire removal, engine work and lubrication. Install in a body shop to operate air tools for body work, sanding and spray painting. Install in a factory for use with air tools and air cleaning and sandblasting. You'll be surprised at what you can do with your Sears Stationary Electric Air Compressors and air tools.



Body shop spray painting . . . see spray guns on page 98



Remove tires from car or truck . . . see air impact wrench on page 103




Clean debris from factory equipment . . . see blow gun on page 100



Repair truck engine . . . see 1-inch impact wrench on page 103



Body shop sanding . . . see orbital sander on page 102

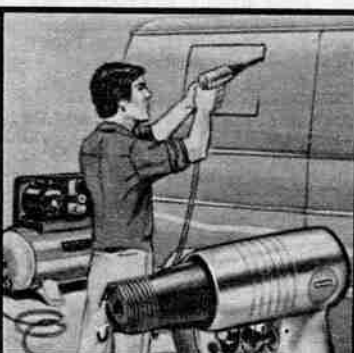

Cut out a window in a van . . . see air hammer and cutter bit on page 102




Assembly line drilling . . . see air, drill, page 103




Sandblast rust off of farm implements . . . see sandblaster on page 99

Gasoline-powered Air Compressors

Provide on-the-job air power anywhere... around the farm, far into the field, even on remote construction sites



Fits in most pickup beds with interior widths of 40 inches or more

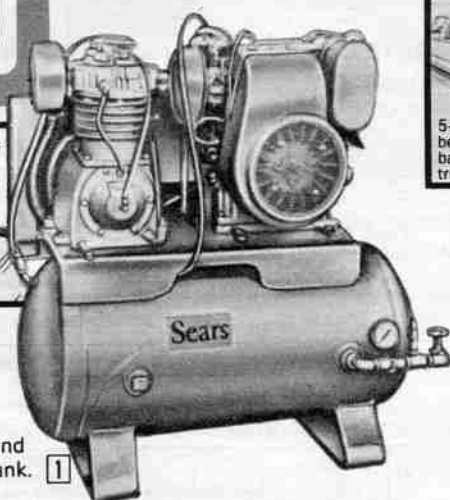

(1) Stationary Two-stage Air Compressor

Electric start 10-HP engine and 30 gallon ASME†-coded air tank. Delivers up to 175 PSI**

\$1379.99

DELIVERY RATE: 18.2 SCFM* at 175 PSI**

AIR STORAGE TANK: 30-gal. tank meets ASME† code; cradle-mounted to reduce vibration. Air pressure gauge 0-300 pounds in 5-lb. graduations.

COMPRESSOR, ENGINE: 2-stage compressor with centrifugal unloader; drain and service valves. Constant-speed head unloaders; pilot set at 160-175 PSI. Removable elements in intake filter silencer for ease of service. Multiple "V"-belt drive with belt guard. 10-HP, 4-cycle gasoline-powered engine with electric starter... requires 12-volt system; 12-foot battery cables and 3-foot ground cable included. Pneumatic throttle control automatically slows engine during non-pumping cycle. 1½-gallon fuel tank... runs up to 3 hours on 1 fill-up.

SIZE: Unit measures 39x23x40 inches high.


ORDERING INFORMATION: See stationary compressor warranty on page 97.

Shipping weight 490 pounds.

30 GT 17317N.....\$1379.99



5-HP model can be mounted in back of pickup truck; mounting kit included

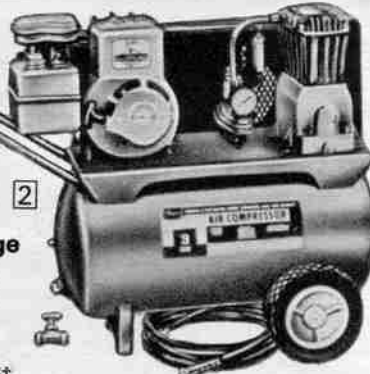

(2) Portable Single-stage 3-HP and 5-HP models

Recoil start... 5-HP model delivers up to 120 PSI**

Low as **\$309.99** 3-HP non-ASME†

DELIVERY RATE, AIR STORAGE TANK: See chart below.

COMPRESSOR, ENGINE: See compressor info., chart below. 4-cycle Briggs & Stratton® gasoline-powered engine. 5-HP with automatic throttle control; 3-HP units with constant-speed unloader. Belt, pulley guard. 3-qt. fuel tank.

ACCESSORIES: Air chuck, 15 ft. of air hose, tank pressure gauge, instructions. 5-HP model includes pick-up truck mounting kit.

SIZES AND ORDERING INFORMATION: Bolt on handle to complete assembly. 3-HP Model 30 GT 17057N cannot be sold in Arkansas, Massachusetts, New Jersey, Oregon or Puerto Rico in compliance with local laws. Order ASME†-approved model if you live in these locales (except Mass.), or if unit is to be used for commercial purposes. See Warranty below.

HP	Catalog Number	No. of cyl.	SCFM* at 40 PSI**	SCFM at 90 PSI	Max PSI	Tank size gals.	Sizes L x W x H inches	Wt. lbs.	Price
3	30GT17057N	1	4.2	2.5	100	12	39¼ x 17¼ x 26½	115	\$309.99
3	30GT17467N	2	6.9	5.8	100	12½	40 x 17¼ x 27½	135	419.99
5	30GT17557N	2	12.1	9.5	120	20†	41½ x 19¼ x 31¼	170	599.99

*SCFM = Standard Cubic Feet per Minute **PSI = Pounds per Square Inch
†ASME = American Society of Mechanical Engineers

FULL ONE YEAR WARRANTY ON PORTABLE AIR COMPRESSOR: If this air compressor fails due to defect in material or workmanship within one year from date of purchase, return it to the nearest Sears store throughout the United States, and Sears will repair it free of charge. If air compressor is used for commercial or rental purposes, warranty will apply for thirty days from date of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CRAFTSMAN Spray Guns

(3) Our finest professional-quality production-type Spray Gun

External mix and siphon-feed give painting results required in fine automotive or industrial-type finishing

\$97.99

Designed for professional use. Handles a wide range of painting materials including stains, acrylics, lacquers, primers, even newer automotive metallics and custom-type paint finishes.

PRESSURE REQUIREMENTS: For 2-HP compressors or larger delivering at least 8.3 SCFM* at 40 PSI**. Order low air consumption cap below to use with compressors small as ¾ HP.

HEAD, SPRAY CONTROL: Aluminum. Non-bleeder type, external mix, siphon feed. Stainless steel fluid needle. Sensitive fluid and fan controls offer a wide variety of precise spray patterns.

CUP: Aluminum. 1-quart, 2-prong quick release. Wide mouth for easy cleaning and filling.

ORDERING INFO: See warranty at right.

30 GT 15634—Wt. 3 lbs. 4 oz.\$97.99

Replacement Gasket. (Not shown.)

ORDER INFO: For spray gun above only.

30 GT 15963—Shpg. wt. 1 oz.\$5.69

Low Air Consumption Cap

(Not shown.) Lets you use spray gun above with ¾ to 1½-HP compressors.

ORDERING INFORMATION:

30 GT 16431—Shpg. wt. 3 oz.\$14.99

External mix, siphon or pressure feed for big jobs

\$67.99

4

Internal/external mix, siphon or pressure feed

\$37.99

5

(4) Professional-quality Spray Gun

PRESSURE REQ.: For 1-HP compressors or larger delivering 6.4 or more SCFM* at 40 PSI**.

HEAD, SPRAY CONTROL: Aluminum. Bleeder/non-bleeder type, external mix. Siphon to pressure feed. Stainless steel fluid needle. Sensitive fluid and fan controls.

CUP: Aluminum. Drip-free design. 1-quart; screw-on type.

ORDER INFO: See warranty below. Shpg. wt. 2 lbs. 13 oz.

30 GT 15624.....\$67.99

Replacement Gasket. (Not shown.) For guns (4 and 5) above only.

ORDERING INFORMATION:

30 GT 15964—Shipping weight 1 ounce\$5.69

(5) General-purpose Spray Gun

PRESSURE REQ.: For ½-HP compressors or larger delivering 3 to 6 SCFM* at 40 PSI**.

HEAD, SPRAY CONTROL: Aluminum. epoxy fin. Fluid, fan controls. Bleeder/non-bleeder type; conv. from internal to external mix, pressure to siphon feed.

CUP: Made of aluminum. 1-quart screw-on type.

ORDER INFO: Warranty below.

Shpg. wt. 3 lbs. 1 oz.

30 GT 15614.....\$37.99

(6) Viscosimeter

Use to measure thickness of paint.

ORDERING INFORMATION:

30 GT 16393—Shipping weight 2 ounces\$2.99

FULL ONE YEAR WARRANTY ON CRAFTSMAN SPRAY GUNS: If this Craftsman Spray Gun fails due to a defect in material or workmanship within 1 year from date of purchase, return it to nearest Sears store throughout U.S.; Sears will repair it free of charge. This warranty gives you specific legal rights, you may also have other rights which vary from state to state.

(7) 3-gal. cap. Paint Tank

Use spray guns at left and apply up to 3 gal. of paint with only one filling

\$63.99



CAPACITY: Up to 3 gal. of liquid paint or insert a 1 gal. can of paint.

CONSTR: Galvanized steel.

OPERATION: Pressure-feed. Operates on maximum of 60 PSI**.

SIZE: 9¾ in. in diam., 21½ in. high.

ACCESSORIES: Pressure regulator and safety valve. Order one air hose and one paint hose of the same length (sold on page 100) to connect paint tank to spray gun.

ORDERING INFO: Cannot be sold in Ark., N.J., Ore., or Puerto Rico in compliance with local laws.

30 GT 16105C—Wt. 26 lbs. \$63.99

Disposable Plastic Liners (not shown). End need for tank clean-up.

Pkg. of 6. Shpg. wt. 8 oz.

30 GT 16107.....Pkg. \$3.89



6



- (1) Sandblaster Gun with 1-qt. capacity canister... operates with 1/3-HP air compressors**
\$29.99

Does similar job to units at right. Sprays sand only.
PRESSURE REQUIREMENTS: Use with compact or tank-type compressors, 1/3-HP or larger.
GUN, SPRAY CONTROL: Bleeder-type, pressure-feed. 5/8-in. air jet, 7/64-in. steel nozzle. Instructions.
ORDERING INFORMATION:
 30 GT 16801—Shipping weight 1 lb. 12 oz.\$29.99

Replacement Nozzles (not shown). 7/64-in. orifice.
ORDERING INFORMATION: For (1) only.
 30 GT 16805—Ceramic nozzle. Wt. 2 oz.\$8.39
 30 GT 16825—Steel nozzle. Wt. 3 oz.3.39

Sandblasters

For heavy-duty, efficient cleaning of masonry, metal or wood using ordinary sand

- (3 and 4) Heavy-duty Sandblasters**

(3) Gun with 50-lb. capacity hopper

\$59.99

(4) Gun with 100-lb. capacity hopper

\$69.99

Remove paint, dirt, rust and scale from many surfaces. Can be used to etch plastic, glass, metal, stone. Spray ordinary sand.

PRESSURE REQ: 1-HP compressor or more.
SPRAY CONTROL: Non-bleeder, siphon feed.
COMPONENTS, ORDERING INFORMATION:

(3) 50-lb. capacity Hopper, gun sprays sand or high-pressure liquid. Polypropylene 17x9-inch diameter hopper with built-in sand screen. 15-foot materials hose, 3/32-inch air jet, 3/16-in. ceramic nozzle, instr.
 30 GT 16813—Wt. 6 lbs. 10 oz.\$59.99

(4) Roll-about 100-lb. capacity Sand Hopper, gun. Galvanized metal 21x12-in. diam. hopper mounted on 6-inch wheels. 15-ft. materials hose, 3/32-in. air jet, 3/16-in. ceramic nozzle, instructions incl.
 30 GT 16814C—Shpg. wt. 18 lbs.\$69.99

Ceramic Replacement Nozzle. 3/16-in. orifice. For sand blasters (3) and (4).
 30 GT 16815—Shipping weight 2 oz.\$9.39



- (2) Protective Mask**

Keeps out dried paint and dust. Non-toxic, non-allergenic polyethylene plastic. With disposable filter.
ORDERING INFORMATION:

30 GT 16351—Wt. 2 oz.\$2.99

Extra Filters. Package of 2.
 30 GT 16361—Wt. 1 oz.Pkg. 99c

Replacement Air Pumps

Increase or restore the original air power of your electric or gasoline-powered air compressor with air pumps in sizes that deliver up to 175 PSI**



Single-stage pumps (5), (6) and (7) for home and small shop. Two-stage pumps (8) and (9) for heavy-duty use.

PRESSURE, MOTOR REQUIREMENTS: Built to operate with motor running at 1725 RPM and HP as indicated in chart. Use chart to determine air pressure (PSI**) and delivered air (SCFM*) needed. 4 SCFM* at 90 PSI** will operate most air tools.

FLYWHEEL: Single stage pumps have single-grooved "A" flywheel. Two-stage pumps have double-grooved "A" section flywheels.

SPECIFICATIONS: As listed in chart below.

Key	Bore in.	Stroke inches	For Motor HP	For 40 PSI**		For 90 PSI**		For 125 PSI**		For 175 PSI**	
				Motor pulley in.	SCFM*	Motor pulley in.	SCFM*	Motor pulley in.	SCFM*	Motor pulley in.	SCFM*
(5)	2 1/4	1 1/4	1/2	4.0	1.6	3.5	1.0				
			1/2	5.7	2.3	5.0	1.5				
(6)	2 3/4	2	1 1/2	3.5	6.2	3.5	5.3	3.5	4.9		
			2	4.0	7.1	4.0	6.1	4.0	5.6		
			4	4.25	7.6	4.25	6.5	4.25	6.0		
(7)	2 3/4	1 1/2	1 1/2	3.5	2.4	3.5	1.6				
			3/4	4.0	2.5	4.0	2.1				
			1	5.5	3.3	5.5	2.7				
(8)	3 1/4	3	1 1/2	6.2	8.6	4.7	6.9	4.5	6.3	3.95	5.6
			2	6.95	9.9	6.2	8.9	6.0	8.3	5.3	7.4
(9)	4 3/4	2 1/2	3			4.6	13.6	4.2	12.7	3.1	10.0
			5			7.4	20.8	6.6	18.0	6.4	17.0

ORDERING INFORMATION:

(5) Single-stage, 1-cyl.
 30 GT 17501C—Wt. 21 lbs.\$69.99

(6) Single-stage, 1-cyl.
 30 GT 17503C—Wt. 22 lbs.\$79.99

(7) Single-stage, 2-cyl.
 30 GT 17511L—Wt. 40 lbs.\$109.99

(8) Two-stage, 2-cyl.
 Centrifugal unloader.
 Shipping weight 130 lbs.
 30 GT 17521N\$369.99

(9) Two-stage, 2-cyl.
 Centrifugal unloader.
 Shipping weight 135 lbs.
 30 GT 17523N\$399.99

Versatile Air Brush Sets

Choose models for professional-type work and/or hobby projects ... use for the five projects shown below and many more



(10) Mini-Spray Gun Set
COMPONENTS: Single-action air brush, 8-ft. vinyl hose, 1/4-in. NPT (National Pipe Thread) adapter for compressor use; also on/off valve for using propellant sold at right.
SPRAY CONTROL: External mix. Pattern adjusts from 1/4 to 2 in. Incl. one 4-oz. jar. Instructions.
ORDERING INFO: Wt. 2 lbs.
 30 GT 15502Set \$10.49

(11) Hobby Air Brush Set. Our most popular. Does fine as well as large overall coverage work.
COMPONENTS: Single-action air brush, 8-ft. vinyl hose, 1/4-in. NPT adapter for compressor use; on/off valve for using propellant at right.
SPRAY CONTROL: Professional-type internal mix. Pattern adjusts from 1/8 to 1 1/4 in. With four 1/4-oz. jars.
ORDERING INFO: Wt. 2 lbs.
 30 GT 15504Set \$38.99

Complete Air Brush Kit (not shown). Set (11) above, plus, air brush book (13) at right and extra needles, color cup and jar.
ORDER INFO: Wt. 2 lbs. 12 oz.
 30 GT 15505Kit \$49.99

(12) Pro-style Air Brush Set. Sprays as narrow as 1/16-inch... ideal for fine detailing on vans and automobiles.
COMPONENTS: Air brush, two paint tips... one for fine detailing, one for high viscosity materials for faster spray, heavier coverage. Two air caps. 8 ft. of heavy-duty braided hose. Operates on regulated air supply. 1/4-in. NPT adapter for compressor use. *Not for use with propellant pack sold below.* One 2-oz. paint jar, two 3/4-oz. jars, one metal paint cup. Instructions included.



SPRAY CONTROL: Fingertip-control, double-action air brush. Internal mix for thorough paint atomization. Spray pattern adjusts from 1/16 to 1 1/4 inches. Adjusting screw adjusts and holds pattern.
ORDERING INFORMATION:
 30 GT 15506—Wt. 2 lbs. 8 oz.Set \$78.99

(13) Air Brush Booklet. Contains project ideas and air brush techniques. 32 pages.
ORDERING INFORMATION:
 30 GT 15511—Shpg. wt. 6 oz.\$4.99

Propellant Pack (not shown). For air brushes (10) and (11) at right only. *Not for sale in Oregon.* Two 11-oz. cans.

ORDERING INFORMATION:
 30 GT 15509—Wt. 2 lbs. 8 oz.Pack \$6.99

Increase the capabilities of your Air Compressor with these Accessories



(1) Air-powered Caulk Gun

Great for insulation work on door and window frames or grouting tiles. Can also be used for dispensing adhesives and crack fillers. Delivers a uniform bead.

CAPACITY: Uses standard size 11-ounce caulk cartridge (sold in Big Book).

CONSTRUCTION: Gun has plastic body and pistol-grip . . . allows user one-hand operation. Converts from bleeder to non-bleeder-type. 1/4-inch metal connector for air hose (order hose below right).

PRESSURE REQUIREMENTS: Runs on 20 PSI*; 70 PSI* maximum. Use with compact or tank compressor, 1/10-HP or larger.

ORDERING INFORMATION:
Shipping weight 1 pound 14 ounces.
30 GT 16306 \$14.99

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details



(2 thru 12) Air Filters, Regulators and Accessories

Threaded 3/8-in. inlet and outlet ports with two extra 1/4-in. reducing bushings for use with 1/4-in. air hose fittings.

(2) Air Filter and Regulator with Gauge. Filters out oil, water, dust before entering gun. For air lines delivering up to 150 PSI*. Regulates air pressure 5 to 175 PSI*.

Shipping weight 2 lbs. 5 oz.
30 GT 16023 \$24.49

(3) Portable Air Filter and Oil Fog Lubricator Kit. Save \$2.98. Separate prices total \$32.97. Includes (4), (5), below, and Portable Accessory Kit at right. Unit mounts on user's belt for combination air filtering and tool lubrication. Can be used separately.

30GT16013—Wt. 7 lbs. .Kit \$29.99
Portable Air Line Filter Kit. Save 99c. Sep. prices total \$17.98. As (3) above except without lubricator (5).
30GT16014—Wt. 3 lbs. .Kit \$16.99

Portable Oil Fog Lubricator Kit. Save \$1.99. Sep. prices total \$20.98. As (3) above exc. without air line filter.
Shipping weight 7 lbs. 9 oz.
30 GT 16015 Kit \$18.99

(4) Air Line Filter. Removes moisture and dirt; helps protect air tools from rust, wear. For professional results with oil base paint, lacquers.
30GT16009—Wt. 1 lb. 6 oz. . \$11.99

(5) Oil Fog Lubricator. Lubricates air tools; helps prevent friction damage and extends the life of air tools. Not for use with spray guns.

Shipping weight 1 lb. 10 oz.
30 GT 16017 \$14.99

Portable Accessory Kit (Not shown). For mounting (4) or (5) on belt. Includes air hose assembly with 5-feet of 1/4-inch hose, one 1/4-inch and one 3/8-inch double male connector and universal belt hook.

30 GT 16011—Wt. 1 lb. .Kit \$5.99

(6) Pressure Gauge. For air, water or oil. Gauge can give readings up to 200 PSI*. 1/4-inch male thread.

ORDERING INFORMATION:
30 GT 16042—Wt. 3 oz. . . . \$3.39

(7) Heavy-duty Pressure Regulator and Gauge. Maximum input is 300 PSI*; maximum output is 125 PSI*. Air pressure gauge is included.

Shipping weight 1 lb. 12 oz.
30 GT 16036 \$11.89

(8) Wall Bracket. Attaches (2), (4), (5) or (7) to wall.

ORDERING INFORMATION:
30 GT 16019—Wt. 4 oz. . . . \$1.79
*PSI=Pounds per Square Inch

(9) Air Intake Filter Pad Made of foam. 3x5-inch filter pad fits air intake head of most Sears air compressors.

ORDERING INFORMATION:
Shipping weight 1 ounce.
30 GT 16278 99c

(10) Replacement Pulley Belt. Fits any Sears air compressor using belt part number BT-31. Be sure to see owner's manual for part number.


ORDERING INFORMATION:
Shipping weight 4 ounces.
30 GT 16516 \$5.89

(11) Tank Shut-off Globe Valve. Controls flow of air through pipes and hoses. Made of forged brass. With 3/8-inch diameter fittings.

ORDERING INFORMATION:
Shipping weight 6 ounces.
30 GT 16257 \$4.99

(12) Tank Drain Valve Made of brass. With 1/2-inch diameter fittings.

ORDERING INFORMATION:
Shipping weight 2 ounces.
30 GT 16253 \$1.99



(13 thru 16) Connectors

(13) Quick Connector Sets. Steel. 4-piece sets for male, female couplings. For air only.

SIZES, ORDERING INFO:
1/4-inch. Shpg. wt. 7 oz.
30 GT 16244 Set \$3.99
3/8-inch. Shpg. wt. 9 oz.
30 GT 16246 Set \$4.99

(14) 1/4-inch Female/Male Stud Set. Use with (13). With 3 females and 3 male studs.


ORDERING INFO: Wt. 6 oz.
30 GT 16247 Set \$2.99

(15) Tee Adapter. Made of brass. Operate 2 spray guns.

ORDERING INFO: Wt. 2 oz.
30 GT 16217 \$2.99

(16) Double Male Couplings. Brass. Use to connect hoses. Package of 3.

SIZES, ORDERING INFORMATION:
1/4-in. For air only. Wt. 2 oz.
30 GT 16281 Pkg. \$1.99
3/8-in. For air or paint. Wt. 4 oz.
30 GT 16291 Pkg. \$2.69

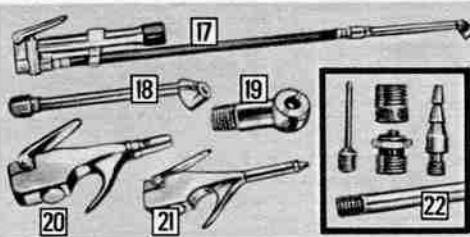

(17 thru 22) Inflators and Blow Guns

(17) Long Air Chuck and Gauge Indicator reads 10 to 120 PSI*. 15-in. hose. 6-in. chuck. Turns 360°. 1/4-in. female thread.

30 GT 16311—Shpg. wt. 1 lb. 8 oz. . . . \$14.99

(18) Dual Tire Air Chuck. 1/4-in. female thread.

30 GT 16272—Shipping weight 5 oz. . . . \$2.99

(19) Brass Air Chuck **ORDERING INFO:** Shpg. wt. 3 oz. each.

30 GT 16269—1/4-inch male thread. . Ea. \$1.39
30 GT 16271—1/4-inch female thread. Ea. 1.39

(20) Professional-type Blow Gun. Meets OSHA (Occupational Safety and Health Act) requirements. Outlet pressure drops to less than 30 PSI* when dead-ended. Lever action. Round tip. Max. inlet pressure: 135 PSI*. 1/4-in. female thread.

ORDERING INFORMATION:
30 GT 16236—Shipping weight 7 oz. . . . \$3.99

(21) Heavy-duty Blow Gun. Easy control lever. Round tip. 1/4-in. female thread.

ORDERING INFORMATION:
30 GT 16232—Shipping weight 9 oz. . . . \$3.29

(22) Inflator Kit. Use with any of our compressors. With inflator needle. Inflator, air duster, tire inflator and adapter. Attach to the end of air hose.

ORDERING INFORMATION:
30 GT 16276—Shipping weight 1 oz. . . Kit \$3.99

Air and Paint hoses . . . extend your range from compressor to work project without extension cords

(23) Flexible Air and Paint Hose

Use instead of extension cord to reach projects . . . helps avoid possibility of voltage drop and subsequent motor burnout.

Lightweight, flexible hose of oil-resisting vinyl tube, nylon braid cover and orange latex coating. 200 PSI* working pressure; 800 PSI* bursting strength. 1/4-in. female swivel connectors on ends.

TYPES, SIZES, ORDERING INFORMATION:

Inside diameter	Length	Catalog Number	Shpg. wt.		Price
			lbs.	oz.	
Air Hose only					
1/4-in.	15 ft.	30 GT 16162	1	10	\$8.49
1/4-in.	25 ft.	30 GT 16166	1	10	12.49
3/8-in.	25 ft.	30 GT 16172	1	9	14.49
1/2-in.	50 ft.	30 GT 16176	3	1	19.49
3/4-in.	15 ft.	30 GT 16182	1	7	9.49
Air or Paint Hose					
3/8-in.	15 ft.	30 GT 16191	2	2	10.49
1/2-in.	25 ft.	30 GT 16201	3	7	15.49
Paint and Lacquer Hose only					
3/8-in.	15 ft.	30 GT 16211	3	5	19.49

(24) Coiled Nylon Air Hose

Resists oil, grease and rotting. Retains flexibility—coils automatically when stored. Extends to 25 feet. Working pressure of 200 PSI*; 800 PSI* bursting strength. 1/4-inch female fittings on each end.


SIZES, ORDER INFO: Shpg. wt. 2 lbs.
30 GT 16221—1/4-inch diameter hose . . \$11.49
30 GT 16223—3/8-inch diameter hose . . 16.49

(25) Hose Repair Kit

For 1/4-inch diameter hose. Includes one female fitting, one splicer and three clamps.

ORDERING INFORMATION: Shpg. wt. 3 oz.
30 GT 16302 Kit \$1.99


*PSI=Pounds per Square Inch

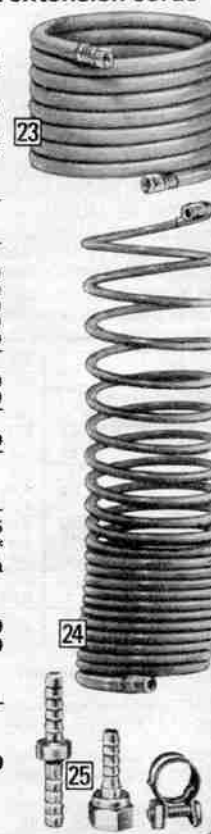

Airless Electric Sprayers ... Self-contained units require no air compressor, just plug in and spray latex paints amazingly fast with less overspray than our conventional spray guns




YOU CAN DO IT

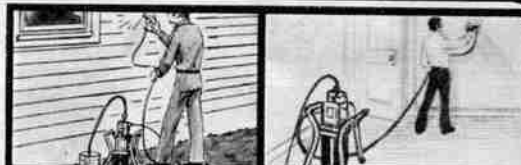

Spray hard-to-paint items such as shutters, fences and gates, and lattice and decorative grillwork.

... with Sears Airless Sprayers you can spray easier, faster and cleaner than with brush, roller or compressor-type spray units. These powerful sprayers handle stains, enamels, varnishes and even latex paints. You'll be surprised what you can do with your Airless Sprayer. All you need is a little know-how and you can do it!

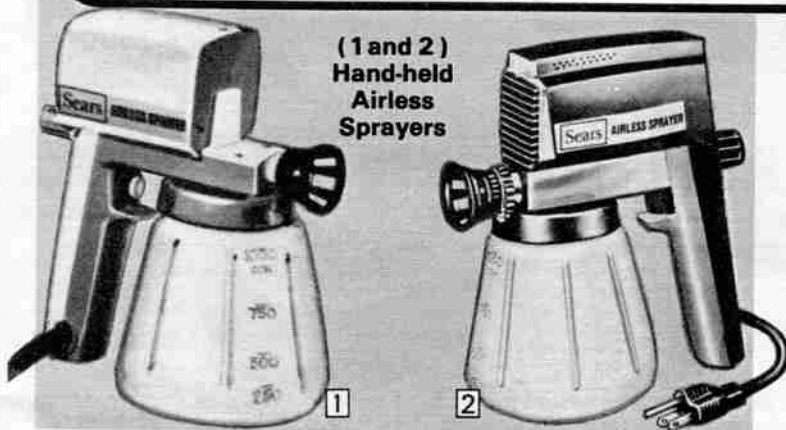

(1 and 2)
Hand-held
Airless
Sprayers

Sprays paint at 7½
fl. oz. per minute

\$69.99

Sprays paint at 10¼
fl. oz. per minute

\$104.99

Less than 4 lbs., unfilled. Use indoors or outdoors. Operates with minimum overspray. Spray latex, enamel, lacquer paints, varnishes and stains.

MOTOR, SPRAY GUN: Electromagnetic linear motor. Single control knob adjusts spray pattern. Working parts of tungsten carbide and hardened chrome steel. Includes one .7mm nozzle and nozzle guard. Plastic housing and handle are highly resistant to organic solvents and humidity. One-quart liquid reservoir. Spray and usage instructions included.

ELECTRICAL INFORMATION: UL listed 110-120-volt, 60-Hz. AC. 3-wire cord. Watts and amps listed in chart below.

SPRAY RATES, ORDER INFO: Don't use as compressor. See Warranty below.

Key	Sprays paint per minute	Size (LxWxH)	Watts	Amps	Catalog Number	Shipping weight	Price
(1)	7½ fl. oz.	8½ x 5 x 8½ in.	45	1.2	30 GT 15518	3 lbs.	\$69.99
(2)	10¼ fl. oz.	8½ x 5 x 9½ in.	85	1.9	30 GT 15528	4 lbs.	\$104.99



(3) **Flexible Extension Nozzle.** Use this .7mm nozzle for hard-to-reach areas.

30 GT 16313—Shipping weight 2 ounces \$11.99



(4) **5-ft. Suction Tube.** For (2) only. Lets you spray directly from paint can.

30 GT 16315—Shipping weight 4 ounces \$11.99

Nozzles (not shown). Hardened steel.

ORDERING INFORMATION:

Size	For use with	Catalog No.	Wt.	Each
.4mm	Lacquers, varnishes, stains	30 GT 16324	1 oz.	\$7.99
.6mm	Enamels, oil base, primers	30 GT 16326	1 oz.	7.99
.7mm	General purposes	30 GT 16327	1 oz.	7.99
.8mm	Latex, heavy materials	30 GT 16328	1 oz.	7.99

Fan Nozzle (not shown). Sprays in fan pattern. Tungsten carbide steel.

30 GT 16318—Shipping weight 3 ounces \$21.99

Valve Replacement Kit (not shown). Includes 2 valves.

30 GT 16319—Shipping weight 1 ounce Kit \$2.99


FULL SIX MONTH WARRANTY ON AIRLESS SPRAYERS

If the Airless Sprayer fails due to a defect in material or workmanship within six months from the date of purchase, return it to the nearest Sears store throughout the United States, and Sears will repair it, free of charge. If these Airless Sprayers are used for commercial or rental purposes the warranty will apply for 30 days from date of purchase.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

High-speed Airless Sprayer Outfit \$399.99

- Delivers up to 20 fluid ounces of paint per minute ... that means you can spray a whole gallon of paint in under 7 minutes
- Quick-clean spray tip means less time is wasted clearing clogged tips, which gets your jobs done faster

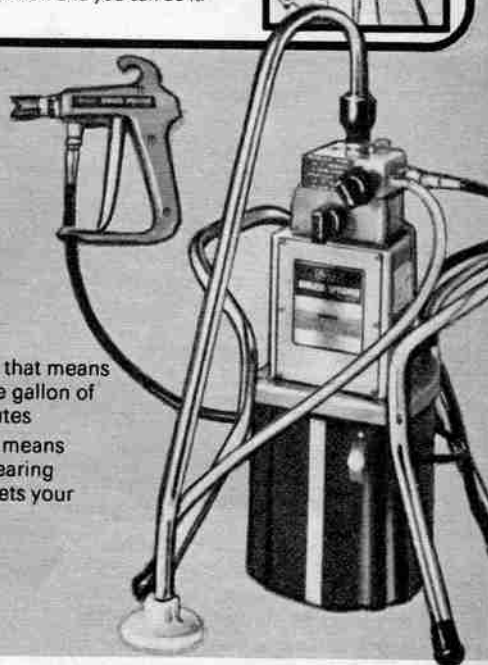

Quick-clean tip. Minimal overspray. Sprays latex, enamel, lacquer paints, varnishes, stains. Suction element goes into paint can. Single control knob for pressure.

SPRAY RATE: Sprays at 20 fluid oz. per min. at pressures up to 2500 PSI*.

MOTOR, SPRAY GUN: Totally enclosed, fan-cooled ¼-HP motor. Spray gun's working parts are of hardened steel. Safety lock, diffuser, nozzle and trigger guards. Gun and hose meet OSHA** requirements. 14x16x21 in. high.

ACCESSORIES: One quick-clean .015-inch tip, 15 feet of ¼-inch spray hose (use with up to 100 feet of hose) and operating manual.

ELECTRICAL INFORMATION: 110-120 volts, 60-Hz. AC. 400 watts at maximum pressure. 6-ft., 3-wire cord. Use 20-amp slow fuse (not included).

ORDERING INFORMATION: Not for use as a compressor. Shipped partially assembled. See Warranty below left. See "N" suffix on page 69.

30 GT 15557N—Shipping weight 50 pounds \$399.99

Accessories (not shown). For unit above.

12-in. Extension pole. For hard-to-reach areas.

30 GT 16212—Shipping weight 5 ounces \$17.49

5-ft. Whip Hose Extension. Fits between existing hose and gun for flexibility.

30 GT 16216—Shipping weight 5 ounces \$10.79

High-pressure Spray Hose. ¼-in. nylon hose, ground wire.

30 GT 16213—25-foot length. Shpg. wt. 2 lbs. \$29.99

30 GT 16214—50-foot length. Shpg. wt. 4 lbs. 8 oz. 59.99

High-pressure Hose Connection Nipple. Steel. ¼-in. Use with hoses above.

30 GT 16215—Shipping weight 2 ounces \$1.89

Quick-clean Airless Tips. For (30 GT 15557N) above only.

30 GT 16283—.011 in. for lacquers, stains. Shpg. wt. 1 oz. \$23.99

30 GT 16284—.013 in. for primers, oil-base. Shpg. wt. 1 oz. 23.99

30 GT 16286—.015 in. for latex, general duty. Shpg. wt. 1 oz. 23.99

Gun Filter Kit. Includes coarse and fine filters to help prevent clogging.

30 GT 16229—Shipping weight 6 ounces \$19.79

Paint Hopper. For (30 GT 15557N) above only. Polyethylene plastic. 5 quart.

30 GT 16228—Shipping weight 1 pound \$19.79


*Pounds per Square Inch **Occupational Safety and Health Act

High-pressure Washer Kit. Sprays detergent and water at 500 PSI*. Includes 12-inch extension pole and .025-inch stainless steel tip.

ORDERING INFORMATION:


30 GT 16218—Shipping weight 5 ounces .. Kit \$20.49





CRAFTSMAN® Air-drive Tools deliver more power per pound than equally rated electric tools

- **Durability**—Air-drive tools run cooler than electric tools, and tools that run cooler last longer
- **Weight**—Air-drive tools can be as little as half the weight of their electric counterparts. After 8 hours on the job, you'll appreciate that

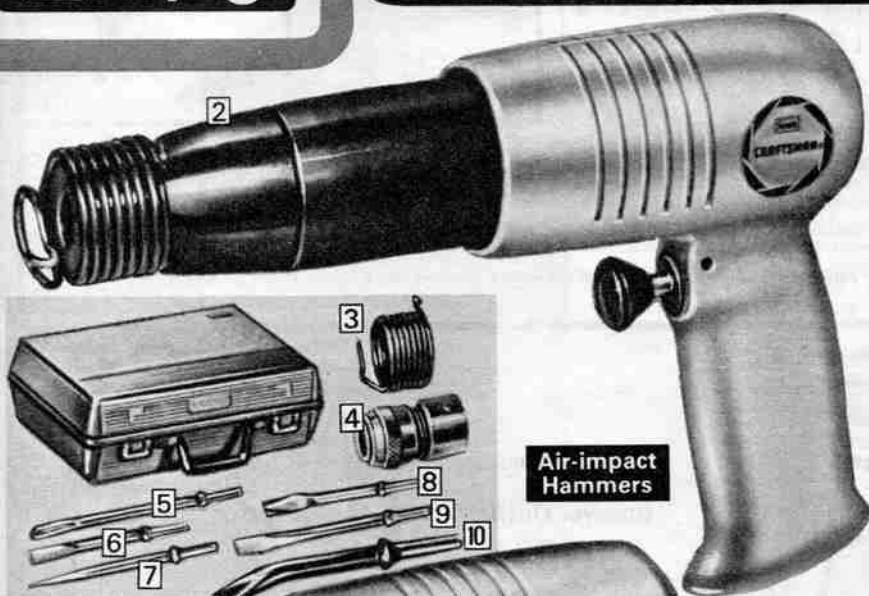

Air-impact Hammers

Long-Barrel Air-impact Hammer provides 2100 blows per minute with longer stroke for more power

Hammer alone
\$68⁹⁹

Hammer Kit
\$93⁹⁹

Short Barrel Air-impact Hammer delivers 3500 blows per minute. Rapid hammer action means less cutting time. Provides high speed needed for efficient muffler, brake and body work.

Hammer alone
\$39⁵⁰

Hammer Kit
\$63⁹⁹

(1) Short-barrel Hammer. Designed for removing exhaust systems, shock absorber nuts, brake drums, license plate bolts, etc.

SPEED: Built-in regulator varies speed. Provides 3500 blows per minute of rapid hammer action.

CONSTRUCTION: Die-cast aluminum housing. Durable alloy steel barrel. Piston of medium carbon steel, heat-treated for hardness without brittleness. Piston and barrel bore-ground to mirror finishes for low friction and long life. 6¾ inches long. Retainer (3) included.

AIR INTAKE: Air inlet: ¼-inch pipe thread.

ORDERING INFORMATION: See chart at top of opposite page for air requirements for ordering proper compressor on pages 96-97. See warranty, opposite page.

Hammer with retainer (3) alone.
Shipping weight 4 lbs. 5 oz.
9 GT 1885 **\$39.50**

Hammer Kit. Includes Hammer plus Permax plastic case and chisels (5) through (9) at right.
Shipping weight 7 lbs. 8 oz.
9 GT 18851 Kit **\$63.99**

(2) Long-barrel Hammer. Longer stroke makes this our hardest hitting hammer. Designed for frame and front-end work; removes exhaust systems, shock absorber nuts, brake drums, ball joints, universal joints.

SPEED: Built-in air regulator varies speed. Provides 2100 blows per minute of hard-hitting power.

CONSTRUCTION: Die-cast aluminum housing. Durable alloy steel barrel. Piston of medium carbon steel, heat-treated for hardness without brittleness. Piston and barrel bore-ground to mirror finishes for low friction, long life. 8¾ inches long. Retainer (3) included with tool.

AIR INTAKE: Air inlet: ¼-inch pipe thread.

ORDERING INFORMATION: See chart at top of opposite page for air requirements for ordering proper compressor on pages 96-97. See warranty on opposite page.

Hammer with retainer (3) alone.
Shipping weight 4 pounds 7 ounces.
9 GT 18923 **\$68.99**

Hammer Kit. Includes hammer plus Permax plastic case and chisels (5) through (9) below.
9 GT 18924—Shipping weight 8 lbs. 5 oz. Kit **\$93.99**

(3 thru 10) Accessories for air-impact hammers. Forged high-carbon steel. Tempered to hold edges. Shanks ground to fit .401 openings of both hammers (1) and (2).

(3)	9 GT 18966	Retainer Attachment	4 oz.	\$3.40
(4)	9 GT 18929	Posi-lock Retainer	1 lb. 4 oz.	19.99
(5)	9 GT 18811	Muffler Splitter	15 oz.	4.99
(6)	9 GT 18812	Pipe, Panel Cutter	13 oz.	4.99
(7)	9 GT 18813	¾-inch Cold Chisel	13 oz.	3.49
(8)	9 GT 18814	Rivet Cutter	12 oz.	3.49
(9)	9 GT 18815	Pin Punch	13 oz.	3.49
(10)	9 GT 18818	Claw Ripper	7 oz.	4.99



Rotary/Orbital-action Sander. Two sanding actions for finishing flat and contoured surfaces ... make this sander ideal for auto body work

\$69⁵⁰

Air-drive Sanders

Orbital-action Sander for finishing flat surfaces **\$78⁹⁹**

(11) Rotary/Orbital-action Sander. For final finishing of auto body repairs. Rotary-action provides smooth circular sanding; orbital-action helps deliver patternless finish. Ideal for auto body work. Imported.

PAPER SIZE: 5-inch sanding surface. Order paper below.

SPEED: Built-in air regulator varies speed. Free speed of 10,000 rpm.

CONSTRUCTION: Die-cast aluminum housing with rubber guard. Dynamically balanced for minimum vibration. Durable aluminum and neoprene sanding pad flexes at edges for contour work. Ball-bearing construction. Circular exhaust diffuses air flow so as not to interfere with tool operation.

AIR INTAKE: Air inlet: ¼-inch pipe thread.

ORDERING INFORMATION: See chart at top of opposite page for air requirements for ordering proper compressor on pages 96-97. See warranty on opposite page.

9 GT 18965—Shipping weight 4 lbs. 4 oz. **\$69.50**

Replacement Sanding Pad for sander (11) above.

9 GT 18953—Shipping weight 4 ounces **\$7.90**

Pressure Sensitive Sanding Discs (not shown). For sander (11) above. Adhesive backing for quick replacement.

9 GT 30051—Fine grain. Pkg. of 5. Wt. 3 oz. Pkg. **\$1.29**

9 GT 30052—Med. grain. Pkg. of 5. Wt. 4 oz. Pkg. **1.29**

9 GT 30053—Coarse grain. Pkg. of 4. Wt. 4 oz. Pkg. **1.29**

(12) Orbital-action Sander. For finishing furniture, auto body repairs on flat surfaces. Orbital-action helps deliver patternless finish on flat surfaces. Imported.

PAPER SIZE: 3¾x9 inches.

SPEED: Built-in air regulator varies speed to suit job. Free speed of 8000 rpm.

CONSTRUCTION: Die-cast aluminum with rubber guard. Neoprene pad has rounded edges to help protect against sandpaper tearing. Ball-bearing construction. Muffled rear exhaust minimizes air flow interference.

AIR INTAKE: Air inlet: ¼-inch pipe thread.

ORDERING INFORMATION: See chart at top of opposite page for air requirements. See warranty, opposite page.
9 GT 18827—Shipping weight 7 pounds **\$78.99**

FULL ONE YEAR WARRANTY ON CRAFTSMAN® AIR-DRIVE TOOLS. If any Craftsman air-drive tool fails due to a defect in material or workmanship within one year from the date of purchase, Sears will repair it, free of charge. Warranty service is available by simply returning the air-drive tool to the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Minimum air requirements for (1 and 2), opposite page, and (11 thru 17)

Catalog No.	Working SCFM*	PSI**	Hose	Tank	Catalog No.	Working SCFM*	PSI**	Hose	Tank
9 GT 18962	7.5	90	5/16-in.	20 gal.	9 GT 18936	6	90	5/16-in.	20 gal.
9 GT 18963	12	90	5/16-in.	80 gal.	9 GT 18923	4	90	5/16-in.	12 gal.
9 GT 18964	12	90	5/16-in.	80 gal.	9 GT 1885	4	90	5/16-in.	12 gal.
9 GT 18925	4	90	5/16-in.	12 gal.	9 GT 18827	12	75	5/16-in.	30 gal.
9 GT 18947	4	90	5/16-in.	12 gal.	9 GT 18965	16	75	5/16-in.	30 gal.

*SCFM: Standard Cubic Feet per Minute

**PSI: Pounds per Square Inch

3/8-inch Air-drive Drills feature 1/2-HP air motors that need very little maintenance



Single-speed Drill
\$42⁵⁰

3/8-inch Drill with teasing throttle and locking device
\$73⁹⁹



Die Grinder Kit for fine contour grinding and finishing

Complete kit **\$118⁹⁹**

Grinder alone **\$78⁹⁹**

(13) Single-speed Drill. Ideal for general drilling, wood boring, honing, reaming and countersinking. Exhaust air vented out of top of drill, away from operator. Imported.
MOTOR, BEARINGS AND GEARS: Air motor develops maximum 1/2 HP. Ball, needle bearing construction. Full-hardened planetary gearing. Free speed of 2800 rpm.
HOUSING: Die-cast aluminum two-piece gear housing. Steel end plates. 6 1/4 inches long.
CHUCK: Jacobs® 3/8-inch drill chuck.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.
ORDER INFO: See warranty above. See chart above for air requirements for ordering proper compressor on pages 96-97.
9 GT 18847—Shipping weight 2 pounds 15 ounces **\$42.50**

(14) Drill with teasing throttle. Ideal for general drilling, wood boring, honing, reaming and countersinking. Imported.
MOTOR, BEARINGS AND GEARS: Air motor develops maximum 1/2 HP. Ball and needle bearing construction. Full-hardened planetary gearing. Free speed of 2200 rpm. Adjustable teasing throttle lets you vary speed . . . can be locked when desired speed is reached.
HOUSING: Die-cast aluminum, one-piece gear housing for precision alignment. Steel end plates. 6 1/2 inches long.
CHUCK: Jacobs® 3/8-inch drill chuck.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.
ORDER INFO: See warranty above. See chart above for air requirements for ordering proper compressor on pages 96-97.
9 GT 18925—Shipping weight 3 pounds **\$73.99**

(15) Die Grinder Kit
SPEED: Built-in air regulator varies speed. 1/2-HP motor with free speed of 22,000 rpm.
CONSTRUCTION: Steel. Ball-bearing construction. Rear exhaust. Hardened steel end plates in air motor.
ACCESSORIES: Four double-cut solid carbide rotary burrs with 1/4-inch shank diameter (3/8-inch cylindrical shape with end cut, 3/8-inch ball shape, 1/2-inch cylindrical shape with radius end, 1/2-inch taper shape—14° included angle); 2 chuck wrenches; chuck guard; 1/8-inch collet adapter; case.
AIR INTAKE: Air inlet: 1/4-inch pipe thread.
ORDER INFO: See warranty above. See chart above for air requirements for ordering proper compressor on pages 96-97.
9 GT 18888—Shipping weight 2 lbs. 4 oz. **Kit \$118.99**
Die grinder alone. See warranty above.
9 GT 18887—Shipping weight 1 pound 5 ounces **\$78.99**

Air-impact Wrenches

available with short shank.



Our most rugged Impact Wrench with 1-inch square drive . . . delivers 1000 to 1350 ft.-lbs. of torque
\$326⁹⁹



3/4-inch Square Drive Impact Wrench delivers 500 to 700 ft.-lbs. of torque
\$267⁹⁹

See page 105 for Sockets for all air-impact wrenches on these two pages

(16) 1-inch Sq. Drive Impact Wrench
Designed especially for continuous-duty truck tire changing. Rugged double-mass clutch is designed to deliver a balanced impact at every blow. Weight comfortably balanced at adjustable side handle. Imported.
SPINDLE: Ring socket retainer for quick socket changing.
TORQUE: Delivers 1000 to 1350 ft.-lbs. of torque. Trigger control lets you adjust torque to the job. Reversible.
HOUSING: Cast-aluminum with side handle for 2-hand control. 15 3/4 inches long.
CAPACITY: Std. bolt size up to 1 1/4 in.
AIR INTAKE: Air inlet: 1/2-in. pipe thread.
ORDERING INFORMATION: See warranty above. See chart above for air requirements for ordering proper compressor on pages 96-97.

Wrench with 6-inch extended shank. Shipping weight 33 pounds.
T9 GT 18964C **\$326.99**
Wrench with short shank. For use in heavy assembly, maintenance, etc. Shipping weight 29 pounds.
T9 GT 18963C **\$326.99**

(17) 3/4-inch Square Drive Impact Wrench. High power in an 11 1/2-pound tool makes it ideal for spring work on mid-size trucks, tractor and light truck tire changing, diesel engine repair and equipment assembly. Imported.
SPINDLE: Ring socket retainer-type.
TORQUE: Delivers 500 to 700 ft.-lbs. of torque. Trigger control lets you adjust torque to job. Reversible.
HOUSING: Cast-aluminum. 8 inches long. Rubber nose bumper helps protect housing from dents.
CAPACITY: Standard bolt size up to 1 inch.
AIR INTAKE: Air inlet: 1/4-in. threaded pipe.
ORDERING INFORMATION: See Craftsman warranty above. See chart above for minimum air requirements to help you match your impact wrench with the proper compressor sold on pages 96-97.
Shipping weight 11 pounds.

T9 GT 18962 **\$267.99**

Match your Air-drive Tool with the proper compressor sold on pages 96 and 97

Just turn the page for More Impact Wrenches . . . in 1/2 and 3/8-inch square drive sizes

COMB. DATE JUL Sears 103

Air Tool Shop



CRAFTSMAN® Air-Drive Tools

Run cooler, last longer
and are lighter than
our comparable electrics

1/2-inch Square Drive Impact Wrenches

Min. air requirements for
tools on this page. Tank size:
12 gal. 90 PSI.

Catalog Number	Working SCFM	Hose size
9 GT 1886	4.0	3/16-in.
9 GT 18882	3.5	3/16-in.
9 GT 1888	3.5	3/16-in.
T9 GT 18961	4.0	3/16-in.
9 GT 1881	4.0	3/16-in.
9 GT 18803	4.0	3/16-in.

CRAFTSMAN® Air Drive Tools are made with polished internal parts so wear surfaces glide against each other, reducing friction. Clutch mechanisms are made of the finest grade of alloy steels available. Internal corners are rounded-off for smooth operation. Cylinders are surface-forged and heat-treated for durability without brittleness. The end result is a tool which is lighter, yet longer lasting, than our comparable electrics.



Delivers up to 200 ft.-lbs. of torque
more powerful than wrench at far right
... yet is smaller and lighter

Wrench Kit \$123⁹⁹ | Wrench alone \$93⁹⁹



The most powerful CRAFTSMAN 1/2-inch square
drive impact wrench ever offered by Sears...
delivers over 300 ft.-lbs. of torque!

Wrench Kit \$177⁹⁰ | Wrench alone \$147⁹⁰



Delivers up to 160 ft.-lbs. of
torque... smaller and lighter
than our comparable electrics

Wrench Kit \$88⁹⁹ | Wrench alone \$68⁹⁹

Push-through reverse valve. Accepts angle head.

SPINDLE: Ring-retainer type.

TORQUE: Working range: 150 ft.-lbs. Ultimate: 200 ft.-lbs.

Trigger control lets you adjust torque. Reversible.

HOUSING: Cast-aluminum with rubber scuff-guard on nose. Measures 6 1/4 inches long.

AIR INLET: 1/4-inch pipe thread.

ORDER INFO: See chart above. See warranty, p. 103.

Complete Kit. Includes 8 sockets (3/16 thru 7/8-inch); cushion cover; Permanex® polyethylene case.

Shipping weight 10 lbs. 5 oz.

9 GT 18942.....Kit \$123.99

Wrench alone. Imported.

9 GT 18882—Shipping weight 6 lbs. 2 oz.....\$93.99

Wrench with 2-inch extended shank. Imported.

9 GT 18883—Shipping weight 6 lbs.....\$93.99

Protective Cushion Cover alone.

9 GT 18921—Shipping weight 8 oz.....\$3.90

Clutch design plus 30% larger motor than wrench at left lets this wrench deliver up to 300+ ft.-lbs. of torque.

SPINDLE: Ring-retainer type.

TORQUE: Working range: from 10 ft.-lbs. to 300+ ft.-lbs.

Built-in power regulator. Push-through reverse valve for convenient one-handed operation.

HOUSING: Cast aluminum. Rubber scuff guards on nose, heel help protect against denting and scratching of work-piece. 7 3/8 inches long.

AIR INLET: 1/4-inch pipe thread.

ORDER INFO: See chart above. See warranty, p. 103.

Complete Kit. Includes 8 sockets (3/16 thru 7/8-inch); cushion cover; Permanex® polyethylene case.

Shipping weight 10 lbs. 8 oz.

9 GT 18944.....Kit \$177.90

Wrench alone.

9 GT 18886—Shipping weight 6 lbs. 10 oz.....\$147.90

Protective Cushion Cover alone.

9 GT 18912—Shipping weight 8 ounces.....\$3.90

SPINDLE: Ring-retainer type... ideal for automotive use and jobs requiring quick socket changes.

TORQUE: Working range: 125 ft.-lbs.

Ultimate 160 ft.-lbs. Trigger control lets you adjust torque. Reversible.

HOUSING: Cast-aluminum. 7-in. long.

AIR INLET: 1/4-inch pipe thread.

ORDERING INFO: See chart above for minimum air requirements for ordering proper compressor on pages 97-98. See warranty on page 103.

Complete Kit. Includes 8 sockets (3/16 thru 7/8-inch); Permanex® polyethylene storage/carrying case.

Shipping weight 10 lbs. 12 oz.

9 GT 18881.....Kit \$88.99

Wrench alone.

9 GT 18888—Wt. 6 lbs. 2 oz.....\$68.99

3/8-in. Sq. Drive Ratchet Wrench



Delivers up to
45 ft.-lbs. of torque

Wrench Kit \$93⁹⁹ | Wrench alone \$73⁹⁹



3/8-inch Square Drive Impact Wrenches

Choose either compact model for limited-access areas, or standard model... both deliver up to 75 ft.-lbs. of torque... Your Choice

\$78⁹⁹

For installing spark plugs, carburetors, water pumps, etc.

SPINDLE: Ball-type retainer.

TORQUE: Delivers up to 45 ft.-lbs. of torque. No-load speed of 150 rpm. Finger-controlled teasing throttle. Reversible. 100% ball bearings.

HOUSING: Die-cast aluminum. 10 1/4 in. long.

AIR INLET: 1/4-in. pipe thread.

ORDER INFO: See chart above. See warranty, p. 103.

Complete Kit. Includes 7 impact sockets (5/16 thru 1 1/16-in.); carrying/storage case.

9 GT 18805—Wt. 4 lbs. 5 oz.....Kit \$93.99

Wrench alone.

9 GT 18803—Wt. 2 lbs. 5 oz.....73.99

SPINDLE: Ring-retainer type.

TORQUE: Working range: 55 ft.-lbs. Ultimate: 75 ft.-lbs. Trigger control lets you adjust torque to match the job.

HOUSING: Cast-aluminum housing. Rubber scuff guard on nose. Measures 5 3/4-inches.

AIR INLET: 1/4-in. pipe thread.

ORDERING INFO: See chart above for minimum air requirements. See warranty, p. 103.

Shipping weight 2 lbs. 13 oz.

9 GT 1881.....\$78.99

For fast removal of small fasteners, engine manifold bolts, shock absorbers, motorcycle repair.

SPINDLE: Ring-retainer type.

TORQUE: Working range: 55 ft.-lbs. Ultimate: 75 ft.-lbs. Trigger-stop regulator lets you adjust torque to job. Reversible. Imported.

HOUSING: Alum. housing. Rubber scuff guard on nose. 5 3/4-in. long.

AIR INLET: 1/4-in. pipe thread.

ORDER INFO: See chart above. See warranty, p. 103.


T9 GT 18961—Wt. 3 lbs.....\$78.99

**Sears Has a
Credit Plan
to Suit Most
Every Need**

See Big Book
or ask
for details

CRAFTSMAN® Electric Impact Wrenches

No compressor needed... use anywhere there's electricity

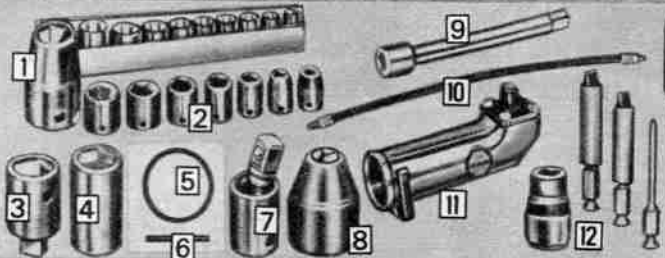

Sockets, Accessories, and Replacement Parts for Air-Drive Wrenches sold on opposite page

CONSTR: Molybdenum alloy steel, black-oxide finish, 6-pt. openings.

(1) CRAFTSMAN 11-piece 1/2-inch square drive Impact Socket Set. Ten 6-point sockets (5/16 thru 1-inch); metal tray.

ORDER INFO: Warranty p. 112. Shipping weight 3 lbs. 12 oz. 9 GT 44019.....Set \$24.50

(2) CRAFTSMAN 7-pc. 3/8-in. sq. drive Impact Socket Set. Seven 6-pt. sockets (5/16 thru 11/16-inch).

ORDER INFO: Warranty p. 112. Shipping weight 12 ounces. 9 GT 44013.....Set \$13.99

Individual Sockets

Catalog Number	Size	Shpg. wt. lbs. oz.	Each
CRAFTSMAN Individual 1/2-in. drive Sockets			
9 GT 47571	5/16-in.	3	\$2.39
9 GT 47572	3/8-in.	3	2.39
9 GT 47573	7/16-in.	3	2.39
9 GT 47574	1/2-in.	3	2.39
9 GT 47575	5/8-in.	4	2.39
9 GT 47576	3/4-in.	4	2.39
9 GT 47577	11/16-in.	4	2.39
9 GT 44313	19mm.	5	2.29

Individual 1/2-in. drive Sockets			
9 GT 44001	7/16-in.	5	2.49
9 GT 44002	1/2-in.	5	2.49
9 GT 44003	5/8-in.	6	2.59
9 GT 44004	3/4-in.	6	2.59
9 GT 44005	11/16-in.	7	2.59
9 GT 44006	3/4-in.	6	2.69
9 GT 44007	13/16-in.	7	2.69
9 GT 44008	7/8-in.	8	2.69
9 GT 44009	15/16-in.	10	2.89
9 GT 44011	1-in.	11	2.99
9 GT 47968	11/16-in.	(10)	3.99
9 GT 47564	19mm.	6	2.59
9 GT 47565	20mm.	7	2.69
9 GT 47566	21mm.	7	2.69

Indiv. 3/4-in. drive Sockets (Not Craftsman)			
9 GT 47952	3/4-in.	(13)	4.99
9 GT 47953	13/16-in.	(13)	4.99
9 GT 47954	7/8-in.	(1)	4.99
9 GT 47955	15/16-in.	(14)	4.99
9 GT 47956	1-in.	(14)	4.99
9 GT 47957	11/16-in.	(1)	5.49
9 GT 47958	13/16-in.	(1)	5.49
9 GT 47959	15/16-in.	(2)	5.99
9 GT 47961	11/4-in.	(2)	5.99
9 GT 47962	13/16-in.	(2)	6.49
9 GT 47963	15/16-in.	(2)	6.99
9 GT 47964	17/16-in.	(2)	7.49
9 GT 47965	11/2-in.	(2)	7.99

Indiv. 1-in. drive Sockets (Not Craftsman)			
9 GT 47915	1-in.	(1)	\$7.99
9 GT 47916	11/16-in.	(1)	7.99
9 GT 47917	7/8-in.	(1)	7.99
9 GT 47918	15/16-in.	(1)	7.99
9 GT 47919	1-in.	(2)	7.99
9 GT 47921	11/16-in.	(2)	7.99
9 GT 47922	7/8-in.	(2)	7.99
9 GT 47923	15/16-in.	(2)	7.99
9 GT 47924	11/4-in.	(2)	7.99
9 GT 47925	13/16-in.	(2)	8.49
9 GT 47926	15/16-in.	(2)	8.49
9 GT 47927	17/16-in.	(2)	8.99
9 GT 47928	11/2-in.	(2)	8.99
9 GT 47929	13/16-in.	(2)	9.99
9 GT 47931	15/16-in.	(2)	9.99
9 GT 47932	11/2-in.	(2)	10.99
9 GT 47933	13/4-in.	(3)	10.99
9 GT 47934	15/16-in.	(3)	11.99
9 GT 47935	7/8-in.	(3)	11.99
9 GT 47936	15/16-in.	(3)	13.99
9 GT 47937	2-in.	(3)	14.99
9 GT 47938	21/16-in.	(3)	14.99
9 GT 47939	23/16-in.	(4)	17.99
9 GT 47941	21/16-in.	(4)	17.99
9 GT 47942	21/16-in.	(3)	18.99
9 GT 47943	23/16-in.	(4)	18.99
9 GT 47944	25/16-in.	(4)	23.99
9 GT 47945	27/16-in.	(4)	25.99
9 GT 47946	29/16-in.	(4)	28.99

(3) CRAFTSMAN Impact Adapter

Converts 1/2-in. drive to 3/8-in. ORDER INFO: Warranty p. 112. 9 GT 44124—Wt. 5 oz.\$2.39

(4) 1/2-in. sq. drive Double-end Socket. 6-pt., 3/4-in. opening at one end; 6-pt., 13/16-in. opening at other. For 1/2-in. sq. drive impact tools with extended shank (as 9 GT 18892). For short shank tools (as 9 GT 18882). ORDERING INFO: Use with (9). 9 GT 44110—Shpg. wt. 9 oz. ...\$3.69

(5) "O" Rings. Use with pins below to help secure sockets on wrenches with pin-retainer spindles. SIZES, ORDERING INFO:

For 3/4-inch square drive sockets (3/4 thru 1 1/8-in.).

F9 GT 47949—(Wt. 1 oz.)69c

For 1-inch square drive sockets (3/4 thru 1 1/16-in.).

F9 GT 47912—(Wt. 1 oz.)99c

For 1 1/4-inch square drive sockets (1 1/4 thru 2 1/2-in.).

F9 GT 47913—(Wt. 1 oz.)99c

For 3/4-inch square drive sockets (13/16 thru 1 1/2-in.).

F9 GT 47951—(Wt. 1 oz.)69c

(6) Pins. Use with "O"-rings above to help secure sockets on wrenches with pin-retainer spindles. SIZES, ORDERING INFORMATION:

For all 3/4-in. sq. dr. impact sockets. F9 GT 47948—(Wt. 1 oz.)49c

For 1-inch square drive impact sockets (3/4 thru 1 1/16-in.).

F9 GT 47911—(Wt. 2 oz.)49c

For 1 1/4-inch square drive impact sockets (1 1/4 thru 2 1/2-in.).

F9 GT 47914—(Wt. 2 oz.)49c

(7) CRAFTSMAN Universal Joints. Alloy steel with black-oxide finish.

SIZES, ORDERING INFORMATION:

Catalog Number	Drive size	Shipping weight	Each
9 GT 44123	3/8-in.	4 oz.	\$5.29
9 GT 44125	1/2-in.	8 oz.	5.49

(8) CRAFTSMAN Impact Chuck. Converts 1/2-inch square drive air impact wrench to drill. Grips 1/8 to 1/2-inch diameter bits. Drill wood, metal.

ORDER INFO: Warranty p. 112. 9 GT 2253—Wt. 1 lb. 7 oz. ...\$15.89

(9) Extensions. Alloy steel, black-oxide finish.

SIZES, ORDERING INFORMATION:

Catalog Number	Drive size	Size in.	Shpg. wt.	Each
9 GT 4477	1/2	6	(12 oz.)	\$4.29
9 GT 47966	3/4	7	(2 lbs.)	12.49
9 GT 47967	1	7	(4 lbs.)	19.99

(10) 2-ft. Air Hose. 3/4-in. diam. whip hose. 1/4-in. male connectors on both ends.

ORDERING INFORMATION: 9 GT 18956—Wt. 10 oz.\$4.90

(11) CRAFTSMAN Angle-head Attachment. Cast-alum. For wrenches 9-18885, 9-18882, 9-1888 and former 9-1883, 18835.

ORDERING INFO: Warranty p. 112. Shipping weight 2 lbs. 5 oz. 9 GT 18891.....\$99.99

(12) CRAFTSMAN Screwdriver Chuck and Bits. 1/2-in. sq. drive. No. 2 Phillips, Nos. 12-14, 14-16 flat bits with finders. Steel.

ORDERING INFO: Warranty p. 112. Shipping weight 1 lb. 3 oz. 9 GT 18867.....Set \$24.89

SHIPPING NOTE: "F" items (as F9 47968) sent postpaid (except to Alaska and Hawaii) from Barberton, Ohio.



Impact Wrench alone
\$89.50

1/2-inch Square Drive

Save \$6.40 when you buy Impact Wrench with Chuck (14), Case (15)

Sep. prices total \$116.28
\$109.88

- Delivers up to 100 foot-pounds of torque
- Reversible—loosens bolts almost as easily as it fastens
- Develops up to 1/2-HP... 1750 rpm—two impacts per revolution

(13) Variable-torque Wrench

MOTOR AND TORQUE: Motor develops max. 1/3-HP with no-load speed of 1750 rpm with two impacts per rev. Delivers up to 100 foot-pounds of torque. Trigger control lets you choose the torque. Reversible, removes fasteners. Permanently lubricated ball and roller bearings. Accessible motor brushes.

HOUSING: Thermoset polyester motor housing, aluminum gear housing. 12 1/2 in. long. Polymer handle, cover. Slide switch reverses rotation. Removable handle for 2-hand control. Rubber boot helps protect against scuffing surfaces.

ELECTRICAL INFO: Double-insulated. 6-ft., 2-wire neoprene cord. Operates on 110-120-volt, 60-Hz. AC. 480 input watts. UL listed.

ORDER INFO: See warranty below. 9GT1830—Wt. 7 lbs. 7 oz. \$89.50

Wrench (13) with Chuck (14) and Permanex® plastic Case (15)

ORDER INFO: See warranty below. Shpg. wt. 12 lbs. 12 oz. 9 GT 18303.....Kit \$109.88

Single-speed Wrench. (Not shown.)

Like (13) at left, but without variable speed. To reach lower torques, operate trigger intermittently. Develops maximum 1/4-HP.

ORDER INFO: See warranty below. 9 GT 1886—Wt. 9 lbs.\$79.50

(14) Chuck for Wrenches. 1/2-inch square drive electric wrench to drill.

Grips 1/8 to 1/2-in. diameter bits, 1/2-inch sq. drive. Drill wood, metal.

ORDERING INFORMATION: 9 GT 2253—Wt. 1 lb. 7 oz. ...\$15.89

(15) Permanex® plastic Case for Wrenches. 16x13 1/2x5 inches high.

9 GT 1456—Wt. 3 lbs. 14 oz. \$10.89

FULL ONE YEAR WARRANTY ON CRAFTSMAN ELECTRIC IMPACT WRENCHES. If any Craftsman Electric Impact Wrench fails to give complete satisfaction within one year from date of purchase, return it to the nearest Sears store throughout the U.S. and Sears will replace it, free of charge. If the Impact Wrench is used for commercial or rental purposes, this warranty applies for only 90 days from date of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

MOTOR AND TORQUE: Motor develops maximum 1/3-HP with no-load speed of 1700 rpm with 2 impacts per revolution. Delivers up to 40 ft.-lbs. of torque. Trigger control lets you choose the right torque for the job. Reversible... removes fasteners. Sleeve bearing construction. Motor brushes are easily accessible for maintenance.

HOUSING: Polymer motor housing. Measures 11 inches long. Slide switch reverses rotation of impact. Removable handle for two-hand control.

ELECTRICAL INFORMATION: Double-insulated. 6-foot, 2-wire neoprene cord. Operates on 110-120-volt, 60-Hz. AC. 384 full-load input watts. UL listed.

ORDERING INFORMATION: See warranty above. 9 GT 1813—Wt. 6 lbs. \$59.50



3/8-inch Square Drive

- Delivers up to 40 ft.-lbs. of torque
- Reversible
- Develops up to 1/3-HP 1700 rpm—2 impacts per revolution



Sun Automotive Testing Equipment



Sun Dwell Tachometer
\$54.99



Sun Dual-meter Analyzer performs over 30 electrical and ignition tests
\$147.49



Sun HC/CO Emission Analyzer helps you tune your car efficiently
\$259.99



Sun Inductive Timing Light accurate to 7,000 rpm
\$43.49



Sears/PENSKE Diagnostic Oscilloscope performs 11 electrical and ignition tests
\$569.99



Sears Inductive Timing Light accurate to 8,000 rpm
\$39.99

(1) Sun Dwell Tachometer

Performs tests on ignition point dwell angle, rpm, point resistance, carburetor mixture, idle, dwell variation, cylinder efficiency and PCV valve.
METER: Handcrafted Sun meter with 120° D'Arsonval movement, 6 1/2-in. wide scale with ABS plastic lens.
SCALES: Low rpm scale: 0-1500; high rpm scale: 0-6000; 0-90° dwell; good-bad point resistance.
CIRCUITRY, ELECTRICAL INFORMATION: Solid state. Powered by your car's 12-volt battery.
HOUSING: Steel housing 5 1/4 x 11 1/2 x 4 1/2 inches deep.
ACCESS: Color-coded test leads with clamp-on pickups. GM and Ford adapter. Instruction manual incl.
ORDERING INFORMATION: For 4, 6 or 8-cylinder vehicles with conventional or electronic ignition. *Warranted by Sun Electric Corp.; write for free copy of warranty, see page 69.*
28 GT 21053—Shipping weight 5 lbs. 8 oz. ... \$54.99

(2) Sun Dual-meter Analyzer

Dual meter allows simultaneous readings of related test functions. Tests alternator/generator, voltage regulator, point resistance, dwell, high/low rpm, charging amps, car battery functions and others.
METERS: 2 Sun meters with 120° jeweled D'Arsonval movements, 7 1/2-in. wide, color-coded scales, zero-adjusting plastic lenses.
SCALES: 0-1500/0-6000 rpm; 0-2/0-20 volts; 0-100/0-100,000 ohms; 0-90° dwell; 0-100/0-500 amps; 0-15/15-50 kilovolts; point resistance on good-bad band.
CIRCUITRY, ELEC. INFO: Solid state. Powered by vehicle's 12-v. battery, except ohms function powered by one 9-v. and one "D" battery (not included).
HOUSING: Sturdy black textured-steel housing, measures 14x9 1/2 x 13 inches deep overall. Accessory storage compartment in back. Rubber feet help protect surfaces. Handle.
ACCESSORIES: 8-foot color-coded test leads with clamp-on pickups for rpm and kilovolts, battery post adapter shunt for amps. Booted clips for battery volt-ohm, primary. Adapters for Delco High-energy Ignition and Ford coil terminal. Instructions, diagnosis and tune-up manual.
ORDERING INFORMATION: For 4, 6 or 8-cylinder engine with 12-volt conventional or electronic ignition. *Warranted by Sun Electric Corp.; write for free copy of warranty, see p. 69.*
28 GT 21047—Shipping weight 13 lbs. \$147.49

(3) Sun HC/CO Emission Analyzer

Tune your car, diagnose engine problems, help reduce emissions. Measures levels of carbon monoxide (CO) and hydrocarbons (HC) in exhaust. Insert probe in tailpipe, attach leads to battery, read scales.
METERS: Two Sun meters with 120° D'Arsonval movements. Easy-to-read 7 1/2 inch wide scales are color-coded, zero-adjusting. Plastic lens.
SCALES: 14.2:1-10.2:1 Air-fuel Ratio; 0-2.5%/0-10% Carbon Monoxide; 0-500/0-2000 parts-per-million (ppm) Hydrocarbons. Simultaneous readings.
CIRCUITRY, ELEC. INFO: Solid state. Powered by car's 12-v. battery. . . . can carry analyzer in car for road testing.
HOUSING: Black textured-steel housing 14 1/2 x 9 1/2 x 13 in. deep. Rear accessory storage. Handle. Rubber feet.
ACCES: 8-ft. batt. leads. 18-ft. exhaust sample hose, tailpipe probe, replaceable filter. Instructions, diagnosis manual.
ORDER INFO: For any 12-v. gasoline-powered vehicle. *Warranted by Sun Electric Corp.; write for copy, see p. 69.*
28 GT 21051C—Wt. 16 lbs. . . \$259.99

(4) Sun Inductive Timing Light

Set timing, check vacuum and centrifugal advance. Inductive pickup.
CIRCUIT: Xenon tube flash, pre-focused lens. Trigger switch. Solid state.
ELEC. INFO: Powered by 12-v. battery.
HOUSING: Chrome-plated die-cast metal housing, 2 1/4 x 6 3/4 x 11 1/2 in. long. Protective rubber nose cone. Pistol-grip design. Handle hole for easy storage.
ACCESSORIES: Inductive pickup clamps to no. one wire—no adapter needed. 6-ft. color-coded leads. Instruction, tune-up manual.
ORDERING INFORMATION: For all 12-v. conventional and breakerless ignition sys. in 4, 6 or 8-cylinder or rotary engines. *Warranted by Sun Electric Corp.; write for copy, see page 69.*
28GT21052—Wt. 4 lbs. 4 oz. ... \$43.49

(5) Sears/PENSKE Diagnostic Oscilloscope


Performs 11 electrical and ignition tests. Projects ignition system operation. Tests spark plug voltage under load, dynamic point action, condenser action, coil action, secondary resistance, secondary insulation leakage, distributor cap and dwell variation.
SCOPE: 9-inch rectangular cathode ray tube (diagonal measure); plexiglass screen graduated for 4, 6 and 8-cylinder dwell, 23KV and 50KV spark outputs. Automatic sharp focus and high brightness allows use in sunlight.
SCALES: Coil output; insulation, polarity—0-50KV; spark voltage, coil, condenser, points, secondary resistance 0/25KV; distributor cam lobe accuracy in degrees of dwell. 4-position function switch. Red pilot-light power-on indicator.
CIRCUITRY, ELEC. INFO: Solid-state. Powered by car's 12-v. batt. 10-ft. color-coded leads. Push on-off switch. Hor. pattern length, position controls. Vertical position control.
HOUSING: Metal case; molded high-impact plastic front panel. Measures 9 1/4 x 12 1/4 x 16 inches deep.
ACCESS: Inductive pickup clamp; clamp-on, std. and High Energy Ignition pattern pickups; alternator testing adapter, pickup coil test lead furnished. High voltage pliers, instr.
ORDERING INFORMATION: For 4, 6, 8-cylinder and rotary engines with 12-volt conventional or breakerless ignition systems. *Warranted 1 year, see below.*
28 GT 21055C—Shipping weight 26 lbs. \$569.99

(6) Sears Inductive Timing Light

Set timing, check vacuum and centrifugal advance. Inductive pickup.
CIRCUITRY: Xenon flash with prefocused lens. Trigger switch. Solid state.
ELECTRICAL INFO: Powered by car's 12-volt battery.
HOUSING: Chrome-plated die-cast metal housing, plastic. 1 3/4 x 6 1/4 x 11 in. long. Protective rubber nose cone. Pistol grip design.
ACCESS: Inductive pickup clamps on to number one plug wire . . . no adapter need. 6-ft. color-coded leads. Instr. incl.
ORD. INFO: For 12-v. conventional and electronic ignition sys. in 4, 6, 8-cyl. or rotary eng. *Warranted 1 year, see below.*
28 GT 21056—Shipping weight 2 lbs. 1 oz. \$39.99

FULL WARRANTY ON AUTOMOTIVE TEST INSTRUMENTS FOR TIME SPECIFIED. If within the duration of time specified from date of purchase, the automotive test instrument fails due to defect in material or workmanship, return it to the nearest Sears store throughout the U.S., and Sears will repair or replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Heavy-duty Electric Winch \$249.99



Powerguard™ Winch Mount
\$124.99

(7) Heavy-duty Electric Winch

CAPACITY: 3500-lb. single line pull. Develops up to 6000-lb. vertical lift when used with pulley block in double line operation. Pulls 14,000 lb. rolling load up a 20% incline. Delivers full power at any angle.
CONSTR: Galvanized steel. 10-ft. remote control cord, power switch. Manual clutch. Auto. locking action for safety when power is off. 7 1/4 x 9 x 8 1/2 in. high. Black ABS plastic housing. Powered by vehicle's 12-v. battery.
INSTALLATION: Front or rear mount on any pickup, RV or 4-wheel drive vehicle where suitable support is available.
COMPONENTS: Remote 10-ft. power switch, 40-ft. wire harness to battery, 2 automatic circuit breakers plus 50-ft. of 3/4-in. diam. galvanized aircraft cable with forged safety snap hook. Swinger plate for trailer ball hitch.
ACCESS: Incl. 3/4-ton pulley block with forged hook on end; 3 3/8-in. mounting bolts. Emergency hand crank for manual operation. Instructions incl.
28 GT 4941L—Shipping weight 42 pounds \$249.99

(8) Powerguard™ Winch Mount

CONSTR: Protects vehicle grill and winch. Steel. Withstands up to 12,000 lbs., pull-pressure. Bolted to frame. 3 lugs—plate can be used as portable-mount.
ORDERING INFORMATION: Shipping weight each 65 pounds.
28 GT 4944L2—For 1973-77 Chevy, GM pickups, Blazer \$124.99
28 GT 4945L2—1966-77 Ford pickups 124.99
28 GT 4946L2—Chrysler Ram/Trail pickups 124.99

(9) 150 PSI Low Volume High Pressure Pump

CONSTR: 1x26-in. barrel. 22-in. hose. Gauge.
ORDERING INFORMATION: For air shocks, high-pressure bike tires. Wt. 3 lbs.
28 GT 1112 \$13.99

(10) Heavy-duty Pressure Gauge

CONSTRUCTION: Reads from 5 to 60 psi. Bronze bourdon tube with 2-inch diam.
ORDERING INFO: Wt. 4 oz.
28 GT 1148 \$3.69

(11) Gas station-type Pressure Gauge

CONSTR: Reads from 10-130 psi. Measures 12 1/2 in. long.
ORDER INFO: Wt. 6 oz.
28 GT 1072 \$5.99



(1) **1½-ton Hydraulic Jack with lift saddles**
 CONSTR: All steel. Two 5x4½-in. rubber-covered saddles with 15-in. reach. Overload valve. 7-in. rubber-tired wheels. Saddle spread adjustable from 17½ to 52 in.
 LOAD CAPACITY: 1½ tons.
 LIFTING RANGE: 9¼ to 32¾ inches high.
 ORDER INFO: For most cars (except 68 Corvair, Cougar, Pontiac, Toronado; 1969 Corvair; front of 69 Mustang, Riviera, 72 Javelin, AMX; rear of Eldorado, Dodge, Polara and Vega). Pay motor carrier charges from Milwaukee, WI. factory. Allow extra time. No C.O.D.'s.
 F28 GT 1254N—Shipping weight 151 lbs. \$279.99

(2) **Service-station-type Hydraulic Floor Jack**
 CONSTR: All steel. Elongated chassis handles large lifting loads. All steel front, rear caster wheels for heavy-duty use. Handle-mounted release control. Automatic overload-protection valve helps prevent over-extension of jack piston. 41¾ in. long handle removes for compact storage, rubber grip 13½x7½x56 in. long. Imported.
 LOAD CAPACITY: 3 tons. Capable of lifting one end or one side of car, light truck, etc.
 LIFTING RANGE: From 5 to 24 inches.
 SADDLE: Swivel-type, 5¾x4½ inches. Safety lips around saddle edges help hold load in place.
 ORDERING INFORMATION:
 28 GT 1201N—Shpg. wt. 167 lbs. \$319.99



Hydraulic Jacks, Press and Power Sets

Hydraulic Hand Jack

Low as **\$279.99** 8-ton capacity

Deliver full lifting power in upright or side position.

CONSTR: Made of heavy-duty commercial-quality steel. Cylinder, housing and base precision fit for virtually leak-proof operation. 12 and 20-ton jacks with built-in carrying handle. Imported.

Lifting cap. . . . Cast iron. Grooved for gripping power.

Piston and cylinder . . . Precision-machined steel for excellent fit and easy operation.

Base . . . Cast iron with release valve.

Handle . . . 2 or 3 locking pieces, depending on model.

LOAD CAPACITY, LIFTING RANGE, ORDERING INFORMATION: Order from chart below.



Load capacity	Total lifting range in inches	Hydraulic lift in inches	Screw extension in inches	Catalog Number	Shpg. wt. lbs.	Price each
8-ton	9¼ to 18	5¼	27	28 GT 12014C	17	\$27.99
12-ton	9¼ to 18¾	5¼	3¼	28 GT 12016C	20	\$35.99
20-ton	9¼ to 18¾	6	3	28 GT 12017C	32	\$61.99



These items also included with 4 and 10-ton sets



Portable Hydraulic Power Sets \$219.99 4-ton Set

Choose 4 or 10-ton capacity

Make quick work of bent automobile frames and heavy lifting jobs.


SET COMPOSITION: 4, 10-ton sets include hydraulic power unit; 3, 5, 10, 18, 23-inch steel extension tubes; wedge head; 90° V-base; serrated saddle; ram toe; 2¾-inch flex head; male connector; base spread toe, 3 couplings. Hydraulic power unit; couplings; 5, 10, 18-inch extension tubes sold sep. below, right (3 thru 7).
 ORDERING INFORMATION: 4 and 10-ton unit accessories not interchangeable. From Columbus, Wisc. factory. See Shpg. Note right.

4-ton Set . . . as shown. With 5-in. stroke; 14¾-in. extended height, 9¾-in. collapsed.
 F28 GT 1280—Wt. 25 lbs. Set \$219.99
 10-ton Set . . . as shown. With 6-in. stroke; 17¾-in. extended height, 11¾-in. collapsed.
 F28 GT 1290—Wt. 64 lbs. Set \$319.99

(3) **Hydraulic Unit only**
 ORDERING INFORMATION:
 F28 GT 1281—4-ton. Wt. 11 lbs. \$159.99
 F28 GT 1291—10-ton. Wt. 30 lbs. 219.99



Spreader Ram Attachment for unit above
 Lifts heavy objects; spreads crushed objects, 1-ton capacity. Stroke 3¾ in., extended height 3¾ in., collapsed ht. ¾ in. at tips. Return spring.
 ORDER INFO: From Columbus, Wisc. factory. See Shpg. Note right.
 F28 GT 1286—4-ton. Shipping weight 4 pounds \$53.99
 F28 GT 1296—10-ton. Shipping weight 5 pounds 56.99



(16) **Filling, Transferring Dispenser**
 For transmission, differential, heavier oils. Fits 25, 40-lb. containers with removable tops, 4-ft. heavy-duty oil resistant hose; bent nozzle to fit all openings. Pressed steel top.
 ORDERING INFORMATION:
 28 GT 4596—Wt. 7 lbs. 8 oz. \$12.99




(17) **Lift-type Suction Pump**
 Draws 1½ pints per 36-in. stroke, 1½-in. diam. steel tubing cylinder, 42 in. long. Steel valve, ¾-in. garden-hose coupling for use with ¾-in. spout (incl.) or garden hose (not incl.). Suction pipe fits 15, 30, 55-gal. drums. Bung bushing fits 2-in. open.
 ORDERING INFORMATION:
 28 GT 4549C—Shpg. wt. 7 lbs. \$8.99

(18) **Rotary Hand Oil Pump**
 Pumps gas, light oils and liquids. Fits 55-gal. drum. Cast-iron pump parts, carbon sliding vanes. Incl. 8-ft. rubber hose, ¾-in. flexible coupling, ferruled nozzle, ¾-in. steel tubing spout; 42-in. long, ¾-in. diam. suction pipe. Bung bushing fits 2-in. opening.
 ORDERING INFORMATION:
 28 GT 4639L2—Shpg. wt. 22 lbs. \$49.99

(19) **Commercial-quality Grease Gun**
 CONSTR: Allows one-hand operation with air compressor (not incl.) of 30-150 PSI range. Safety lock prevents plunger and rod from releasing during loading. Size-O-Matic, Buna-N® rubber plunger pushes all grease in barrel forward under pressure, automatically sizes itself for bulk, dispenser or cartridge operation to seal barrel or cartridge. Loads 16-ounce bulk or dispenser; takes any 14½-ounce cartridge. Snap-on coupler.
 ORDERING INFORMATION:
 28 GT 4977—Shpg. wt. 6 lbs. \$25.99

(20) **Gun-filling Dispenser**
 For all filler-plug guns. Follower plate for heavy-duty greases. Fits 25 to 40-lb. pails with straight walls, 11¼ to 11½-in. diam. tops. ¼-in. adapter.
 ORD. INFO: Wt. 8 lbs.
 28 GT 4998 . \$13.99

(21) **Chassis Lubricator**
 One-hand operation gun delivers grease up to 12,000 pounds per sq. inch. Lightweight. Swivel-mount with 10-ft. hose. For 25 to 50 lb. pails with straight walls.
 ORDERING INFO:
 Shpg. wt. 14 lbs.
 28 GT 4997C . \$38.99

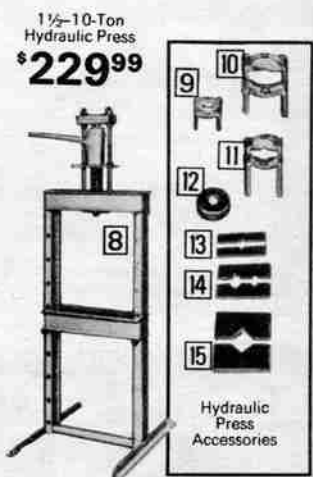

1½-ton Hydraulic Press \$229.99

For removing and installing bearings, U-joints, gears, bushings, ball joints, pulleys, etc. 52 inches high (excluding jack).

ORDER INFO: Use with up to 10-ton hydraulic jack. See accessories sold below. Pay motor carrier charges from Milwaukee, Wisc. factory. Allow time. No C.O.D.'s. Shpg. wt. 140 lbs.
 F28 GT 12001N \$229.99

(9 thru 15) **Accessories for Hydraulic Press**
 Do more types of work without special rigging or damage to parts.
 ORDER INFO: Sent from Milwaukee, Wisc. factory. See Shipping Note below.
 Order from chart below.

Item	Description	Catalog Number	Wt. lbs.	Price
(9)	Small Bearing Puller	F28 GT 12003	6	\$42.99
(10)	Large Bearing Puller	F28 GT 12005	20	\$129.99
(11)	Medium Bearing Puller	F28 GT 12006	13	\$89.99
(12)	Safety Shield	F28 GT 12004	2	6.99
(13)	Small V-blocks (pair)	F28 GT 12008	9	17.99
(14)	Arbor Plates (pair)	F28 GT 12009	19	19.99
(15)	Large V-blocks (pair)	F28 GT 12007	46	39.99

SHIPPING NOTE: "F" items (as F28 GT 12007) shipped from factory indicated. Pay shipping and handling charges from Distribution Center. Allow extra delivery time. No C.O.D.'s.



Lubricating Equipment and Accessories



Electric Hoists

- Positive-action worm gear drive mechanism and brake provide quiet, dependable operation
- 500 or 1000-pound lift capacity



500-lb. load capacity
\$299.99

CONSTRUCTION: Positive action worm-gear drive mechanism with bronze and ball thrust bearings for long life. Worm-gear brake helps keep maximum rated loads from slipping. Cast aluminum housing, 1/4-inch steel chain. Forged steel swivel hooks with safety latches rotate 360° for load positioning. 110-120-v., 60-c. AC.

CAPACITIES AND ORDERING INFORMATION: Warranted by Process Engineering Company, for free copy see page 69.

500-lb. capacity. Lift speed 8 feet per minute. Wt. 57 lbs.
9 GT 78701L.....\$299.99

1000-lb. capacity. Lift speed 4 feet per minute. Wt. 62 lbs.
9 GT 78702L.....\$399.99


CRAFTSMAN® Portable Power Pulls

Lift engines, pull out fenders, stretch cable and fencing




Steel Storage Units

Organize your storage areas, save valuable floor space... choose open-bin or drawer models

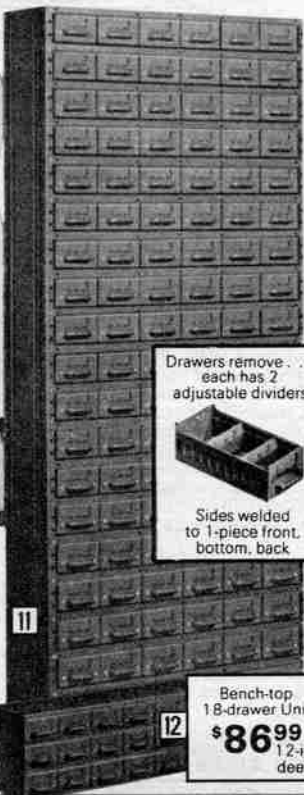

Drawers remove... each has 2 adjustable dividers

Sides welded to 1-piece front, bottom, back



(8) 66 bins (9) 84 bins (10) 108 bins

Bench-top 18-drawer Unit
\$86.99

Manual, gear-drive Hoists

With worm-gear drive to help keep maximum rated loads from slipping

- (1) Chain Hoist... choose 1,000, 2,000 or 4,000-lb. capacity

CONSTRUCTION: Worm-gear drive mechanism with bronze and ball thrust bearings for long life. Non-slip drive plus adjustable safety brake. Aluminum alloy cast housing, steel chain, forged steel swivel hooks, safety latch rotate 360° for load positioning.

CAPACITIES, ORDERING INFORMATION:

1,000-lb. capacity, 8-ft. maximum lift. 13-foot chain. Leverage ratio 50:1.

T9 GT 7870C—Shipping weight 27 pounds.....\$99.99

2,000-lb. capacity, 8-ft. maximum lift. 13-foot chain. Leverage ratio 106:1.

T9 GT 7871C—Shipping weight 35 pounds.....\$149.99

4,000-lb. capacity, 8-ft. maximum lift. 13-foot chain. Leverage ratio 213:1.

T9 GT 7872L—Shipping weight 47 pounds.....\$199.99

- (2) Steel cable Hoist with 1500-lb. capacity

CONSTRUCTION: Worm-drive gearing. Bronze and ball thrust bearings. Anti-slip automatic stop. Aluminum alloy housing. Forged steel swivel hook. 3/16-inch diameter steel cable.

CAPACITY: Lifts up to 1500 lbs. Maximum lift 12 ft. Delivers 40:1 leverage ratio.

ORDERING INFORMATION:
9 GT 7885—Shipping weight 9 lbs. 14 oz.....\$42.99

- (3) Nylon strap Hoist with 2000-lb. capacity

CONSTRUCTION: Like (2) above but with 1 1/4-inch wide nylon strap that helps prevent marring of finishes. Lifts up to 2000 pounds.

ORDERING INFORMATION:
9 GT 7889—Shipping weight 8 lbs. 14 oz.....\$42.99

- (4) CRAFTSMAN® portable Power Pulls

CONSTRUCTION: All steel. Welded frame. Laminated steel ratchet drum. Heat-treated drive and stop pawl assembly for strength. All parts zinc-plated. 3/16-in. diameter aircraft-type cable. Large ratchet cover. Drop forged steel hooks with let-down safety latch.

CAPACITIES, ORDERING INFORMATION:
1000-lb. capacity 10:1 leverage ratio. 12-ft. max. lift.
9 GT 7866C—Shipping weight 7 lbs.\$29.50
2000-lb. capacity 20:1 leverage ratio. 6-ft. max. lift.
9 GT 7867C—Shipping weight 8 lbs.\$39.50



\$99.99
1/2-ton load capacity

- (5) Motor Sling

Steel chain with 2350-pound capacity.

ORDER INFO:
Wt. 2 lbs. 13 oz.
9 GT 7830.....\$9.90

- (6) Wire Gripper. For smooth or barbed wire.

ORDER INFO:
9GT7831—Wt. 1 lb. \$6.40

Open-bin Units

Dividers are adjustable at 1-inch increments... great for odd sized objects

Low as **\$129.99** 21-bin

Drawer-type Unit

108 drawers... 2 adjustable dividers in each give you 324 compartments

\$595.00

- (7 thru 11) Self-standing, large enough to section off areas.

CONSTRUCTION: Four high-carbon steel angle uprights support heavy loads and maintain stability. Solid steel back adds support to entire unit... keeps unit square when heavy objects are stored. Gray enamel protective finish resists chipping and corrosion. Overall: 7 ft. 1 1/2 in. high, 3 ft. wide, 1 ft. deep.

- (7 thru 10) Shelf-type Units

STORAGE FACILITIES: Steel shelves fastened at 10 stress points for support. Vertical steel dividers adjust along shelves in 1-inch intervals.

CAPACITY, ORDER INFO: Sent unassembled. See Shipping Note below.

(7) 21-bin. 3—12x10 1/2 and 18—12x12 inch.

F9 GT 10206N—Wt. 109 lbs.....\$129.99

(8) 66-bin. 6—6x5 1/2, 60—6x6 in.

F9 GT 10208N—Wt. 160 lbs.....\$199.99

(9) 84-bin. 6—6x4 1/2, 78—6x6 in.

F9 GT 10205N—Wt. 182 lbs.....\$229.99

(10) 108-bin. 6—6x6, 102—6x4 1/2 in.

F9 GT 10207N—Wt. 203 lbs.....\$269.99

- (11) Drawer-type Unit

STORAGE FACILITIES: 108 steel drawers each measure 3 1/2 inches high, 5 5/8 inches wide and 11 in. deep... glide smoothly on 2 runners. Each drawer includes 2 dividers to provide 324 separate compartments (extra dividers sold separately below). Corrugated grooves in drawers lets you space dividers as close as 1-in. apart. Drawer front and dividers hold identification labels (not included).

ORDERING INFORMATION: Shipped unassembled. See Shipping Note below.

Shipping weight 428 pounds.
F9 GT 10204N.....\$595.00

- (12) Bench-top, Drawer-type Storage Units

CONSTRUCTION: All steel cabinet includes back for fully surrounded drawers. Gray enamel finish resists chipping, corrosion. Unit measures 34 1/2 inches wide and 13 5/8 inches high. Available with 12 or 18-inch deep drawers.

STORAGE FACILITIES: 18 steel drawers each 3 1/2 in. high, 5 5/8 in. wide. Two dividers included with each drawer to provide 54 separate storage compartments (extra dividers sold below). Space dividers as close as 1-in. apart. Each drawer front and all dividers hold identification labels (not included).

SIZE, ORDERING INFORMATION: See Shipping Note below.

12-inch deep Drawer Unit

F9 GT 10201N—Wt. 64 lbs.....\$86.99


18-inch deep Drawer Unit

F9 GT 10202N—Wt. 84 lbs.....\$99.99

Extra Dividers for (11 and 12). Scoop-type design. Steel.

F9 GT 10203—Shipping weight 4 ounces.....Each 22c

SHIPPING NOTE: "F" items (as F9 GT 10203) from Aurora, Ill. factory. Allow time. No C.O.D.'s. "F" items ending with "N" pay motor carrier charges from factory. For other "F" items pay shpg. handling charges from your Distribution Center.

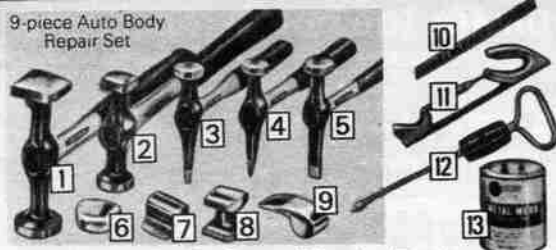

CRAFTSMAN® Body and Fender Tools

9-piece Auto Body Repair Set

INCLUDES: (1) thru (9) below.
Shipping weight 19 lbs.
9GT45883C.....\$67.88

10-piece Auto Body Repair Set

INCLUDES: (1) thru (9) below plus tool box (9 GT 6512) page 35.
Shipping weight 29 lbs.
9GT45882C.....\$82.88

(1 thru 5)

Drop-forged heads. Fiber glass handles. 12-in. long.

(1) Bumping Hammer

For panel work. With 5½-in. head; 1½-in. square face, 1½-in. round face. Shpg. wt. 1 lb. 6 oz.
9 GT 45511.....\$7.47

(2) Light Bumping Hammer

With 3½-in. head; ¾-in. square face, 1½-in. round face. Wt. 1 lb. 9 GT 45501.....\$7.47

(3) Blunt Pick Hammer

5½-in. head; 1½-in. round face, 2½-in. pick. Shpg. wt. 1 lb. 3 oz.
9 GT 45531.....\$7.47

(4) Pointed Pick Hammer

With 5½-in. head; 1½-in. round face, 2½-in. pick. Wt. 1 lb. 3 oz.
9 GT 45561.....\$7.47

(5) Cross-pein Hammer

5½-in. head; 1½-in. round face, 2½x¾-in. cross pein. Wt. 1 lb. 4 oz.
9 GT 45521.....\$7.47

(6) Heel Dolly. Drop-forged steel. Wt. 2 lbs. 11 oz.
9 GT 45621.....\$8.47

(7) Universal Dolly. Two beading surfaces. Drop-forged steel. Wt. 3 lbs. 6 oz.
9 GT 45611.....\$8.97

(8) All-purpose Dolly. 8 molding, beading surfaces. Bottom for panel, fender-skirt work. Drop-forged steel. Shpg. wt. 3 lbs. 2 oz.
9 GT 45651.....\$8.97

(9) Combination Dolly and Spoon. Drop-forged steel. Wt. 3 lbs. 9 oz.
9 GT 45631.....\$8.97

(10) Kromedge® 14-in. Auto Body file. Not Craftsman. Shpg. wt. 14 oz.
9 GT 3114.....\$8.90

(11) Adjustable File Holder with File. Holder has cast alum. frame. With 14-in. Kromedge® file (10) above. Not Craftsman. Shpg. wt. 2 lbs. 4 oz.
9 GT 31134.....\$16.90

(12) Dent Puller. Metal handle grip. 15 in. long. Not Craftsman. Imported. Wt. 2 lbs. 2 oz.
9 GT 45701.....\$5.97

18½-in. Dent Puller. Imported. Wt. 5 lbs. 1 oz. Not Craftsman.
9 GT 4571.....\$7.27

(13) Metal Mend. Plastic compound body filler. No heat required. 32 oz. in can. Not Craftsman. Shipping weight 2 lbs. 7 oz.
9 GT 45742.....Can \$4.89

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS. If any Craftsman Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the U.S. and Sears will replace it, free of charge. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Do-it-Yourself Auto Body Kit \$19.97

(14) Do-it-yourself Auto Body Repair Tool, Finishing Kit

INCLUDES: Dent puller, finishing hammer, dolly, file, file blade holder, sanding block, 10 assorted sandpaper refills and instructions. Imported.

ORDERING INFORMATION: Not Craftsman. Shpg. wt. 7 lbs. 2 oz.
9 GT 4171...Kit \$19.97



Sears Anvil... Indispensable for shaping and forging

\$14.99

CONSTRUCTION: Cast Iron. Anvil measures 10½x4½x4½ inches high. Red finish.

ORDERING INFORMATION: Shipping weight 8 lbs. 10 oz.
9 GT 5173.....\$14.99

Vises give you "hands-free" control any place a steady workpiece is needed



(15) Our strongest Machinists' Vise

CONSTRUCTION: Meets Federal Specification GGG-V 410A for strength. Imported. Body, Jaws: Ductile cast-iron, reinforced at major stress points. Self-lubricating graphite bronze bearings absorb thrust of screw head... reduces friction, wear. Jaws measure 4½ in., open to 7 in. Clamps with force to 3 tons. Machined nut, back jaw keyway. Hardened, tempered steel jaw faces. Replaceable faces pinned to jaws... no screws to mar work. Screw, Handle: Cold-rolled steel screw, covered by front jaw beam... prevents clogging. Steel handle.

ORDERING INFORMATION:
9 GT 5197L—Shipping weight 53 lbs. ...\$121.29

(16) Swivel Base Kit. (For 9 GT 5197L above.) Allows vise to swivel 360°, locks in any position. Ductile cast-iron. Imported.
9 GT 5198—Shpg. wt. 8 lbs. 13 oz. ...Kit \$19.39

Protective Jaw Face (not shown). Fits all machinists vises, 4x1½-in. clamping surface. Pair.
9 GT 51701—Shpg. wt. 1 lb. 2 oz. ...Pair \$3.99

(17) Light-duty Vise

CONSTRUCTION: Body, Jaws: Cast-iron body reinforced at major stress points. Red finish. Anvil, anvil horn. Locking swivel turns 165°. Screw-on tempered steel jaw faces. Screw, Handle: Steel handle. Screw, lock-nut nickel-plated. Imported.

CAPACITIES, ORDERING INFO: Not Craftsman.

3½-in. jaws. Open to 3 in.
9 GT 5178—Shipping wt. 11 lbs. 6 oz.\$11.59

4-in. jaws. Open to 5 inches.
9 GT 5177C—Shipping wt. 17 lbs.\$19.39

(18) Ball-Swivel Vise. Locks in virtually any angle for hobby, detail work. 5½x4½x6¾-in. high.

CONSTRUCTION: Body, Jaws: Cast-zinc body. Jaws, socket base have black enameled finish; natural-finish ball joint. 2½-in. capacity "V" groove jaws; includes removable protective pads. Screws, Handle: Zinc screw, handle.

ORDERING INFORMATION:
9 GT 25146—Shpg. wt. 4 lbs. 15 oz.\$19.99

(19) 3-position Vise

CONSTR: Fits bench from ¾ to 2½-in. thick. Body and Jaws: Natural finish cast alum. body. Steel guide rods. Jaws have 4 in. cap. 1½x4 in. wide. Replaceable jaw faces. Change vise to 45° or 90° angle for workbench or drill press use. Screw, Handle: Steel screw with quick acting release for closing jaws. Knurled handle in horizontal position lets you get firm grip for tightening.

ORDERING INFORMATION:
9 GT 5179—Shipping weight 5 pounds ..\$33.99

(20) CRAFTSMAN® Vacuum-base Portable Vise


CONSTRUCTION: Cast aluminum. Gray finish. Body, Jaws: Apply slight pressure to top of vise and push lever down... holds firmly to any surface. Lift lever to release. Cast steel jaws 2½-in. wide, V-groove. Open to 2 in. Slide-on rubber jaw protectors. Screw and Handle: Steel screw, handle.

ORDERING INFORMATION:
9 GT 5174—Shipping weight 2 lbs. 12 oz. ...\$14.19

(21) Clamp Vise. Sets up where needed.

CONSTR: Fits benches up to 2½-in. thick. Red finish. Imported. Body, Jaws: Cast steel. Permanent pipe jaws, double guide bars for smooth action. Jaws 3-in. wide with 2½ inch capacity. Screw and Handle: Steel screw. Nickel-plated "T" handle.

ORDERING INFORMATION: Not Craftsman.
9 GT 5247—Shipping wt. 4 lbs. 1 oz.\$6.79

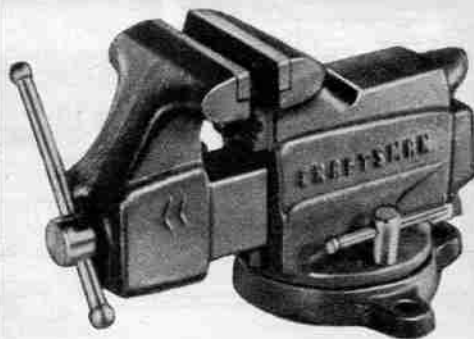

CRAFTSMAN® Heavy-duty Bench Vise

\$2729 3½-in. jaws

CONSTRUCTION: Body, Jaws: Cast gray-iron, reinforced at major stress points for durability... red finish. Large anvil and anvil horn. Base swivels 165°, locks in place with its own handle. Built-in pipe jaws. Screw on, replaceable jaw faces of hardened, tempered steel. Screw and Handle: Steel screw covered on top and sides by steel channel... prevents filings from clogging screw threads. Zinc-plated steel handle with forged ball ends. Imported.

CAPACITIES, ORDERING INFORMATION:

Catalog Number	Jaw size, in.	Opens to, in.	Holds pipe, (diam.) in.	Shpg. wt. lbs.	Price
9 GT 5180C	3½	4	1¼ to 1¼	19	\$27.29
9 GT 5188C	4	5	1¼ to 1¼	27	43.69
9 GT 5181C	5	6	1¼ to 1½	40	62.99



Light-duty Vise
\$1159

These Portable Vises lock in different positions for a handy working angle




180° range 360° axis
\$19.99

\$33.99

45° angle

Use in horizontal position


...vertically

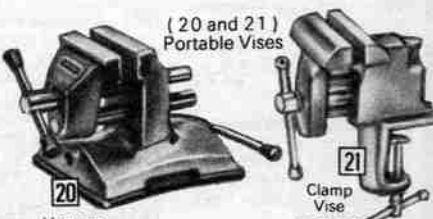

(20 and 21) Portable Vises

\$14.19

\$6.79



CRAFTSMAN Tune-up Tools

(1) **Distributor Wrenches** each with 12-pt. openings. Offset design permits simplified access to mounting bolt. Steel alloy heat-treated, chrome-plated. Imported. *Not Craftsman.*

For Buick, Pontiac, Oldsmobile. $\frac{9}{16}$ -in. opening. Shipping weight 11 ounces. 9 GT 47753\$4.27

For Chev. $\frac{9}{16}$ -in. opening. Shipping weight 11 ounces. 9 GT 47755\$4.27


For Ford, Mercury, $\frac{1}{2}$ -inch opening. Shipping weight 12 ounces. 9 GT 47756\$4.27

For Chrysler, IHC trucks with V-8's, $\frac{1}{2}$ -in. opening. 9GT47754-Wt.15oz.\$4.27

(2) **Distributor Adjuster** For Delco distributors. Flexible shaft. Shipping weight 5 ounces. 9 GT 47723\$3.57

(3) **Carburetor Adjuster** For adjusting idle. Shipping weight 5 ounces. 9 GT 47727\$2.37

(4) **Go-no-go Gauge** 15 blades: .006-.008 thru .020-.022 in. Steel. Shipping weight 5 ounces. 9 GT 40803\$2.17

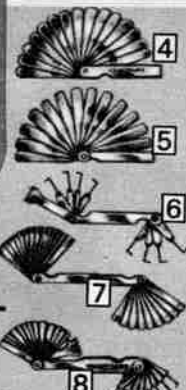


(5) **13-blade Metric Gauge** For imported cars and motorcycles. Sizes .05mm to .10mm plus 1.00mm. Steel. Shipping weight 4 ounces. 9 GT 40807\$2.19

(6) **6-wire High-energy Spark Plug Gap Gauge** For all transistorized ignition systems. Reads in standard and metric. Steel. Shipping weight 5 ounces. 9 GT 40808\$1.27

(7) **25-leaf Feeler Gauge** (not shown). Leaves $\frac{3}{16}$ in. long, sizes .0015 to .035 inches. Steel. Shipping weight 6 ounces. 9 GT 40804\$2.47

(8) **Offset Gauge** 45° 26 leaves; .005 to .30 in., each 4 in. long. 1 in. offset allows adjustment of "V" engine tappets and other hard to reach areas. Steel. Shipping weight 8 ounces. 9 GT 40802\$3.67

(9) **Ignition Gauge** 14 leaves .012-.032 in. 8 wires, .022-.040 in. Steel. Shipping weight 4 ounces. 9 GT 40801\$2.27

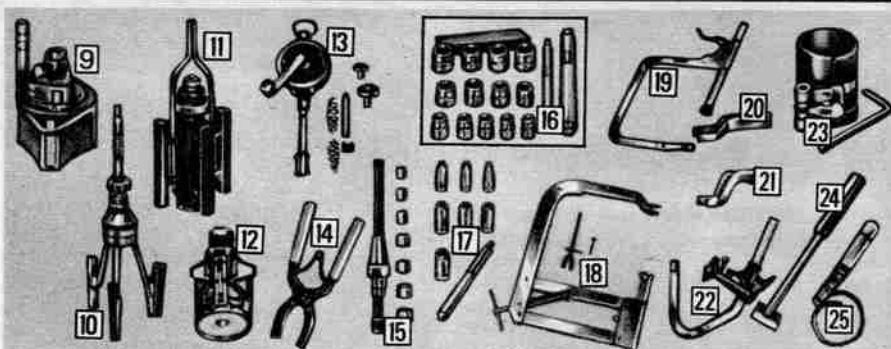

CRAFTSMAN Engine Tools

(9) **Lathe-type Ridge Reamer**. Tool steel cutter. For all 3 to $4\frac{1}{2}$ -inch diam. cylinders and short stroke motors with piston in place. 9 GT 4713—Shpg. wt. 1 lb. 14 oz.\$22.97

(10) **Glaze Breaker**. Range of 2 to 7 in. Operates with $\frac{1}{2}$ to $\frac{3}{4}$ -in. electric drill. 9 GT 4633—Shpg. wt. 1 lb. 14 oz.\$17.97

Replacement Stone Set for (10) Package of three. 9 GT 46331—Shpg. wt. 5 oz.Package \$5.97

(11) **Cylinder Hone**. Range $2\frac{3}{4}$ to $4\frac{1}{2}$ in. Two 5-in. stone sets. Universal joint action. Shank and extension fit $\frac{1}{2}$ -in. drill, drill press. 9 GT 4682—Shpg. wt. 11 lbs.Set \$82.88

Extra Replacement Stones for (11) Two stones, two pads. 9 GT 4687—Medium. Wt. 11 oz.Set \$8.97

9 GT 4686—Coarse. Wt. 11 oz.Set 8.97

(12) **Ridge Reamer**. Wide range $2\frac{3}{4}$ to $4\frac{1}{2}$ -in. scraper action with floating carbide cutter. 9 GT 4723—Shpg. wt. 2 lbs. 9 oz.\$13.97

Replacement Cutter for (12) 9 GT 4724—Shpg. wt. 3 ounces\$3.47

(13) **Valve Grinder**. Reciprocating, progressive action. Long, short stems, 2 suction cups, 2 adapters. For auto, small engine valves. 9 GT 47042—Shpg. wt. 1 lb. 12 oz.\$5.97

(14) **Piston Ring Expander**. $\frac{3}{4}$ to $1\frac{1}{4}$ -in. rings. Shipping weight 7 ounces. 9 GT 4662\$3.37

(15) **Clutch Aligning Set**. 8 diam.: .590, .612, .624, .668, .749, .786, .808, .984-in.; 9 in. long. 9 GT 4728—Shpg. wt. 1 lb. 12 oz.Set \$9.47

(16) **15-pc. Bushing Driver Set**. with 13 collars ($\frac{1}{16}$ to $1\frac{1}{2}$ -in. inside diameter, $\frac{5}{8}$ to $1\frac{1}{4}$ in. outside diameter), 2 driving handles. Case. 9 GT 4707—Shpg. wt. 4 lbs. 4 oz.Set \$31.47

(17) **8-piece Gasket Punch Set**. Not for metal. Includes sizes $\frac{1}{4}$ thru $\frac{3}{8}$ -in. 9 GT 3635—Shpg. wt. 1 lb. 6 oz.Set \$17.97

(18) **Heavy-duty Valve Spring Compressor** 16x13-in. frame, 10 $\frac{1}{2}$ -in. opening, 6 $\frac{1}{4}$ -in. spring steel jaws. 9 GT 47622—Shpg. wt. 9 lbs. 3 oz.\$19.97

(19) **Valve Spring Compressor** 9x11-in. steel frame, 10 $\frac{1}{2}$ -in. opening. No. 1 spring steel jaws. 9 GT 4695—Shpg. wt. 6 lbs. 2 oz.\$9.97

(20) **No. 2 Jaws**. For GMC, Continental engines. Fits compressor (19) above. 9 GT 4697—Shpg. wt. 6 oz.Pair \$1.47

(21) **No. 5 Jaws**. For Plymouth, Dodge, Chrysler. Fits compressor (19) above. 9 GT 4699—Shpg. wt. 6 oz.Pair \$1.97

(22) **Piston Groove Cutter and Cleaner** 5 point sizes for grooving, one for trimming, cleaning. Fits over piston up to 5 in. in diam. 9 GT 4722—Shpg. wt. 1 lb. 2 oz.\$8.77


(23) **Ratchet-type Ring Compressor** For auto or light truck piston rings. Range $2\frac{1}{2}$ to 5 in. Holds up to 4 rings. With wrench. 9 GT 4716—Shpg. wt. 14 oz.\$3.17

(24) **Gasket Scraper** 3 blades; 1, $1\frac{1}{2}$, 2-in. wide. 9 GT 47725—Shpg. wt. 9 ounces\$3.67

Replacement Blades for (24). Pkg. of 6. 9 GT 47729—Shpg. wt. 4 oz.Package \$1.17

(25) **Standard-size Oil Filter Wrench** Swivel handle. 9 GT 47608—Shpg. wt. 1 lb.\$4.37

Small-size Oil Filter Wrench (not shown). 9 GT 47609—Shpg. wt. 15 oz.\$4.37

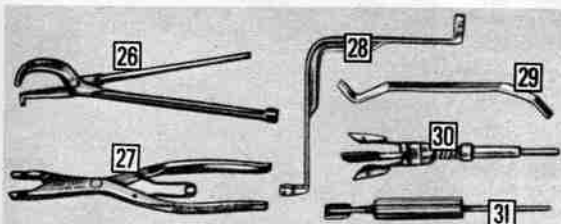

CRAFTSMAN® Brake Tools

(26) **Spring Pliers** Chrome-plated alloy steel 13 $\frac{1}{2}$ -in. long. Shpg. wt. 1 lb. 3 oz. 9 GT 47395\$6.77

(27) **Lock-ring Pliers** Opens 1 $\frac{1}{2}$ in. Chrome-plated forged steel, 8 $\frac{1}{2}$ -in. long. Shpg. wt. 10 oz. 9 GT 4735\$4.47

(28) **Bleeder Wrench** $\frac{5}{16}$, $\frac{3}{8}$ -in. hex ends. For GM since 1955; 1965 Lincoln, Thunderbird. Chrome-plated alloy steel. *Not Craftsman.* Shpg. wt. 5 oz. 9 GT 47603\$3.97

(29) **Adjusting Tool** Chrome-plated, drop-forged alloy steel, 1 $\frac{1}{2}$ -in. blade. Meas. $\frac{3}{8}$ in. wide, 9 $\frac{1}{4}$ in. long. Imported. Wt. 9 oz. 9 GT 4740\$1.97

(30) **Cylinder Hone** Three stones hone, polish brake cylinder. Range of $\frac{7}{8}$ to 2 in. Controlled pressure. For $\frac{1}{4}$ -in. drill. Wt. 6 oz. 9 GT 4656\$9.97

Replacement Stones for (30). Pkg. of 3. Wt. 3 oz. 9 GT 4657Pkg. \$2.97

(31) **Spring Tool**. Steel. Removes and replaces brake shoe return springs. Shpg. wt. 8 oz. 9 GT 47724\$3.27



CRAFTSMAN® Tools for shocks, bearings, hubs, axles

(32) **MacPherson Strut Spring Compressor** For removing shock absorbers with MacPherson struts. *Not Craftsman.* 9 GT 47601—Shpg. wt. 12 lbs. 3 oz.\$59.97

(33) **Two-jaw Puller**. Forged high-carbon steel jaws. Fine-pitch screw thread. SIZES AND ORDERING INFORMATION:

Catalog No.	Jaw Spread	Reach	Shpg. wt.	Price
9 GT 46941	0 to 3 in.	2 $\frac{1}{4}$ in.	12 oz.	\$8.97
9 GT 46901	0 to 5 $\frac{1}{2}$ in.	3 $\frac{1}{4}$ in.	1 lb. 12 oz.	11.47
9 GT 46911	0 to 8 in.	5 $\frac{1}{2}$ in.	3 lbs. 2 oz.	18.97
9 GT 46921	0 to 9 $\frac{1}{2}$ in.	8 $\frac{3}{4}$ in.	5 lbs.	36.97

(34) **Three-jaw Puller**. As above but with three jaws for more balance; 0-5 $\frac{1}{2}$ -inch spread, 3 $\frac{1}{4}$ -inch reach. 9 GT 46902—Shpg. wt. 2 lbs. 2 oz.\$17.97

(35) **Hub Puller, Striking Wrench Set**. Three adjustable arms. For 7 $\frac{1}{2}$ -inch bolt circles. Forged steel. 9 GT 46642—Shpg. wt. 9 lbs. 12 oz. Set \$33.97

(36) **Slide Hammer** Heat-treated alloy steel. 24 inches long. 9 GT 4696—Shpg. wt. 5 lbs. 6 oz.\$11.97

(37) **Two-jaw Reversible Puller**. Fits (36). Pulls bearings, retainers. Jaws pull inside or outside. Inside cap. of $\frac{1}{4}$ to $\frac{3}{8}$ in., outside cap. of 1 to $\frac{1}{2}$ in.

9 GT 46961—Shpg. wt. 1 lb. 8 oz.\$14.97

Conversion Kit (not shown). Converts two-jaw puller (37) to 3-jaw puller. Capacity outside $1\frac{1}{2}$ to 4 $\frac{1}{2}$ in., inside $\frac{1}{16}$ to $\frac{3}{4}$ in.


9 GT 46962—Shpg. wt. 10 oz.Kit \$9.47

(38) **Seal Hook**. Fits (36). Pulls seals, bearings. 9 GT 46964—Shpg. wt. 4 oz.\$5.97

(39) **Axle Puller**. Fits (36). For flange-type rear axles with up to $\frac{1}{2}$ -in. studs and 4, 5 or 6-bolt circle up to 5 $\frac{1}{16}$ in. diam. 9 GT 46963—Shpg. wt. 1 lb. 12 oz.\$11.47

(40) **Harmonic Balancer** 9 GT 47626—Shpg. wt. 2 lbs. 11 oz.\$9.97

WARRANTY NOTE: For Craftsman tools only, see warranty on page 109.

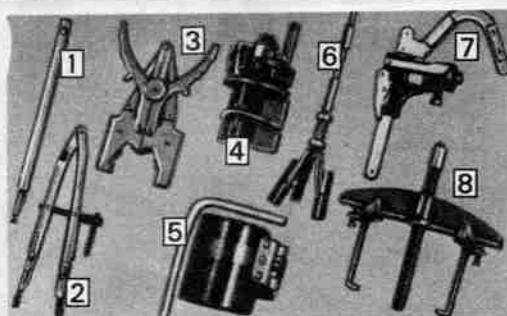

CRAFTSMAN® Small Engine Tools

Save 10% when you buy any 5 or more

(1) **Magnetic Key Insert-er.** Holds split valve locks. For use on Briggs and Stratton engines.
9 GT 47164—Wt. 3 oz. \$2.47
Price when you buy any 5 or more Ea. \$2.22

(2) **Valve Spring Compressor.** Steel.
9GT47621—Wt. 15 oz. \$5.77
Price when you buy any 5 or more Ea. \$5.19

(3) **Ring Expander.** Use for installing or removing piston rings. Capacity 1 1/4 to 2 1/4 in.
9GT47162—Wt. 11 oz. \$3.47
Price when you buy any 5 or more Ea. \$3.12

(4) **Ridge Reamer.** Range from 2 to 3 in. With carbon steel blade.
9 GT 4710—Wt. 1 lb. \$14.97
Price when you buy any 5 or more Ea. \$13.47

(5) **Ring Compressor.** Capacity 1 3/4 to 3 1/2 in. Depth 2 in. Takes all rings at once. Allen wrench incl.
9 GT 47161—Wt. 8 oz. \$2.67
Price when you buy any 5 or more Ea. \$2.40

(6) **Cylinder Hone.** Needs no adapters to change size. Adjustment knob controls pressure in cylinder up to 2 3/4 in. from 1 1/2 in. Wt. 7 oz.
9 GT 47623 \$10.97
Price when you buy any 5 or more Ea. \$9.87

Replacement Stones for (6). Incl. 3 stones.
Shpg. wt. 3 oz.
9 GT 47624 \$4.97
Price when you buy any 5 or more Ea. \$4.47

(7) **Groove Cutter.** Range from 2 to 3 in. Side flanged for slotted pistons. 5 points for grooving and one for trimming lands.
Shpg. wt. 1 lb. 3 oz.
9 GT 47221 \$7.47
Price when you buy any 5 or more Ea. \$6.72

(8) **Flywheel Puller.** Takes diameter up to 6 in. Reach 3 in.
Shpg. wt. 3 lbs. 2 oz.
9 GT 47163 \$10.97
Price when you buy any 5 or more Ea. \$9.87

(17) 12-piece Punch, Line-up and Chisel Set

SET INCL: 6 punches: 3/32, 1/8, 5/32, 3/16-in. pin; 3/8-in. center; 1/2-in. prick. 2 line-up tools: 5/32x7 and 5/16x9-in.; 4 cold chisels: 1/4, 1/2, 5/8, 3/4-in.
9 GT 43031—Wt. 2 lbs. 4 oz. .Set \$17.97

(18) 18-piece Punch, Line-up and Chisel Set

SET INCL: 8 punches: 1/16, 3/32, 1/8, 5/32, 3/16, 1/4-in. pin; 3/8, 1/2-in. center; 3 line-up tools: 5/32x7, 3/16x9, 1/4x12 1/2; 6 cold chisels: 1/4, 3/8, 1/2, 5/8, 3/4, 7/8-in.; pry bar.
9 GT 43033—Wt. 6 lbs. 5 oz. .Set \$24.97

(19) 5-piece Chisel, Punch Set

SET INCL: 2 cold chisels: 1/2, 5/8-in.; 3 punches: 3/8-in. center, 5/32, 1/4-in. pin.
Shipping weight 1 pound 9 ounces.
9 GT 4302 Set \$8.47

(24) Extra Long Cold Chisels

Cuts bolts and rivets.
5/8x12 inches.
Shpg. wt. 13 oz.
9 GT 42991 \$3.47

5/8x18 inches.
Wt. 1 lb. 4 oz.
9 GT 42992 \$4.47

3/4x12 inches.
Wt. 1 lb. 4 oz.
9 GT 42993 \$4.47

(25) Rolling Wedge Bar

With 90° polished rolling head. Measures 16 inches long with 1/16-in. diameter.
Wt. 1 lb. 7 oz.
9 GT 42892 \$7.19

(26) Pry Bar

1/2x16 inches long.
Wt. 1 lb. 1 oz.
9 GT 4283 \$3.67

(27) Line-up Tools. Hardened ends. Meet Federal Specification GGG-P-831e. Not for impact use.

Catalog No.	Size (in.)	Shpg. wt.	Each
9GT42901	5/32x3 1/2x7	4 oz.	\$2.37
9GT42902	3/16x1 1/2x9	8 oz.	2.77
9GT42903	1/4x5/8x12 1/2	1 lb. 4 oz.	3.67
9GT42904	3/8x5/8x9 1/2	1 lb.	3.17

(28) Std.-length Cold Chisels. Meet Federal Spec. GGG-313b for strength.

Catalog No.	Edge	Stock	Length	Wt.	Each
9 GT 42971	1/4 in.	3/16 in.	4 3/4 in.	4 oz.	\$1.57
9 GT 42972	3/8 in.	1/8 in.	5 1/2 in.	4 oz.	1.77
9 GT 42973	1/2 in.	1/16 in.	6 in.	6 oz.	1.97
9 GT 42974	5/8 in.	1/2 in.	6 1/2 in.	9 oz.	2.37
9 GT 42975	3/4 in.	5/8 in.	7 in.	12 oz.	2.77
9 GT 42976	7/8 in.	3/4 in.	7 3/4 in.	*	3.47

*Shipping weight 1 lb.

(29) Pin Punches. Drive out pins, bolts. Meet Fed. Spec. GGG-P-831e.

Catalog No.	Pt.	Length	Wt.	Each
9 GT 42881	1/16 in.	4 1/4 in.	4 oz.	\$1.67
9 GT 42882	3/32 in.	4 3/8 in.	4 oz.	1.67
9 GT 42883	1/8 in.	4 1/2 in.	3 oz.	1.67
9 GT 42884	5/32 in.	5 in.	4 oz.	1.77
9 GT 42885	3/16 in.	5 3/8 in.	5 oz.	1.87
9 GT 42886	1/4 in.	5 3/4 in.	6 oz.	1.97

(30) **CRAFTSMAN Universal Nut Cracker.** Splits nuts up to 7/8 inch across flats without damage to threads. 4 1/2-in. forged steel frame, hardened cutter.
9 GT 4772—Shpg. wt. 15 oz. \$9.97

Replacement Cutter.
9 GT 4773—Shpg. wt. 3 oz. \$2.67

(31) **CRAFTSMAN Hand Impact Driver.** Loosen frozen nuts, bolts.
INCL: 1 1/2-in. square drive tool, adapter, numbers 2 and 4 Phillips bits, 1/2, 3/8-in. straight-slotted bits, pouch.
9 GT 47634—Wt. 2 lbs. 1 oz. .Set \$13.97

(32) **Auto Rustproofing Kit**
KIT COMPOSITION: All materials, instructions to rustproof one car. Incl. 3 aerosol cans (14 oz. each) for interior application; 2 aerosol cans (15 oz. each) for exterior application; three 14-in. plastic spray wands; 3 aerosol spray heads; ten 1/2-in. plastic plugs.
ORDER INFO: Some drilling necessary for interior use in doors, panels.
28 GT 6814—Wt. 7 lbs. Kit \$9.99

(33) **Fiber Glass Repair Kit**
For metal, wood, plastic and fiber glass repairs on your vehicle.
KIT COMPOSITION: Incl. 8 fluid oz. of resin, 3 square ft. of fiber glass cloth, 1/4 fluid oz. of liquid hardener, mixing tray, spatula, instructions.
ORDERING INFORMATION:
28 GT 61308—Wt. 1 lb. Kit \$3.99

(20) 5-piece Punch, Line-up Set

SET INCL: 4 pin punches: 1/16, 3/32, 1/8, 5/32-in. One line-up tool; 5/32-in.
9 GT 4285—Shpg. wt. 12 oz. \$7.97

(21) 4-piece Pin Punch Set

SET INCLUDES: Sizes 1/8, 3/32, 1/16, 1/4-in.
9 GT 4311—Shpg. wt. 1 lb. \$5.97


(22) 3-piece Cold Chisel Set

SET INCL: Sizes 1/4, 3/8, and 1/2-in.
9 GT 4309—Shpg. wt. 10 oz. \$4.77

(23) Center Punches. Mark points for drill holes.

3/8x4 1/2 in. Shipping weight 3 oz.
9 GT 42861 \$1.57

1/2x6 in. Shipping weight 6 oz.
9 GT 42862 \$1.87

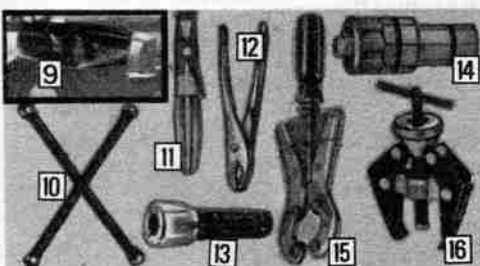

Tire, Battery, Hose, Tailpipe Tools

(9) **Fender Protector.** Wt. 2 lbs. 13 oz.
9 GT 45488 \$6.47

(10) **Cross-rim Wrench with 16 1/2-in. arms.** Chrome-plated steel. Openings of 3/4, 1 1/4, 1 1/2 in., 19 mm.
Shpg. wt. 3 lbs. 2 oz.
9 GT 44888 \$6.27

Wrench with 22 1/2-in. arms. (not shown). As above. Openings: 3/4, 1 1/4, 1 1/2, 1 3/4 in.
Wt. 4 lbs. 10 oz.
9 GT 44889 \$7.47

(11) **Swivel Jaw Hose Pliers with Ratchet.** 8 1/2 inches long.
Shpg. wt. 11 oz.
9 GT 4770 \$4.47

(12) **Hose Clamp Pliers.** Wt. 13 oz.
9 GT 45391 \$4.17

(13) **Terminal Clamp/Battery Post Cleaner.** Stainless steel spring cutters resist corrosion. Shpg. wt. 7 oz.
9 GT 47633 \$3.17

(14) **Tailpipe Expander.** 1 1/2 to 2 1/2-in. range. For use with impact wrench. Not Craftsman.
Wt. 2 lbs. 14 oz.
9 GT 47606 \$9.97

(15) **Muffler Tailpipe Cut-off Tool.** Four cutting wheels cut quick, clean. 1 3/8 to 2 1/2-in. range. Not Craftsman. Wt. 1 lb. 10 oz.
9 GT 47607 \$9.97

Set of 4 Replacement Cutter Wheels. For (15) above. Not Craftsman.
Shpg. wt. 4 oz.
9 GT 47611 Set \$3.57

(16) **Terminal Clamp Lifter.** Shpg. wt. 15 oz.
9 GT 47147 \$6.47

Replacement Bits for hand impact driver Phillips Bit:

9GT47631—No. 1 9GT47632—No. 3
9GT47635—No. 2 9GT47636—No. 4
Shipping weight 3 ounces 87c

3/8-in. Straight-slotted Bit.
9 GT 47637—Shpg. wt. 3 oz. 97c

1/2-in. Straight-slotted Bit.
9 GT 47638—Shpg. wt. 3 oz. \$2.37

3-pc. Bit Set for motorcycle (not shown). Incl. Nos. 2, 3 Phillips bits; 3/8-in. slotted blade. Bits 3-in. long.
Shipping weight 4 ounces.
9 GT 47639 Set \$3.99

(34) Auto Body Repair Kit

KIT COMPOSITION: Includes 24 oz. can of polyester body filler, 3/4-oz. tube of cream hardener, plastic spreader, 96 square inches of fiber glass screening, instructions.
ORDERING INFORMATION:
28 GT 61322C—Wt. 3 lbs. Kit \$2.29


(35) Body Shop Repair Kit

Use to repair dents, holes, scratches or rusted-out areas on your vehicle.
KIT COMP: Includes car body filler, cream hardener, spot putty, gray aerosol primer, three plastic spreaders, sand paper, sanding block, mixing tray, screening and instructions.
ORDERING INFORMATION: Auto-body repair kit manual included.
Shipping weight 4 lbs. 8 oz.
28 GT 59234 Kit \$7.99

Repair and Rustproofing Kits



FULL UNLIMITED WARRANTY ON CRAFTSMAN HAND TOOLS AND POCKET KNIVES: If any Craftsman hand tool or pocket knife ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

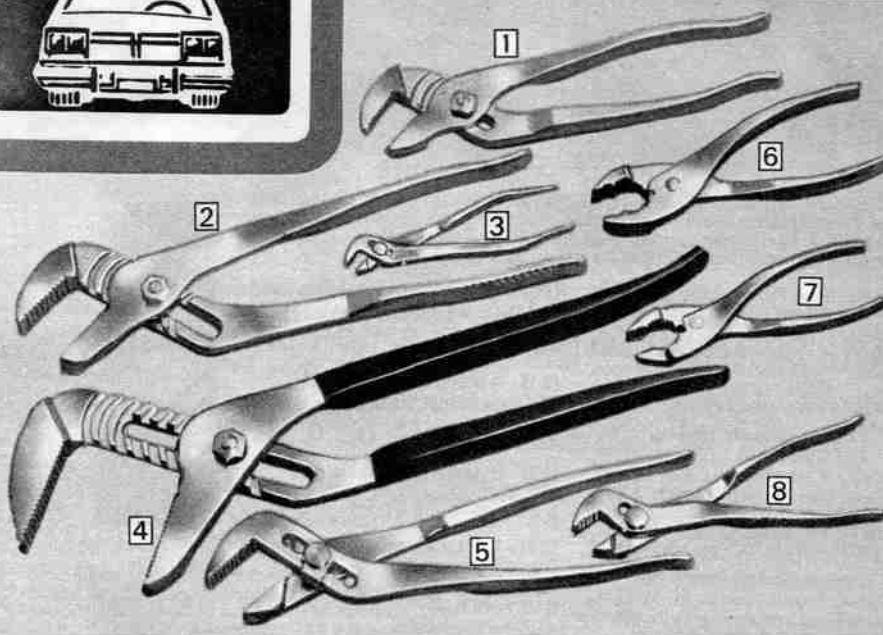

(1 thru 8) Adjustable-joint Pliers

CONSTRUCTION: Single-hand grip clamps jaws ... combines with pipe wrench-type precision-broached teeth to hold work firmly. Forged high-carbon boron steel is heat treated for maximum durability. Nickel-chrome plated.

(1 and 2) Arc Joint® Pliers

SIZES, ORDERING INFORMATION: See warranty above.

(1) *9 1/2-in. long, 5 position, 1 1/2-in. jaw cap.*
9 GT 45382—Shpg. wt. 14 oz. \$5.47

9 1/2-inches long (not shown). Same as above but with vinyl grips.
9 GT 45381—Shpg. wt. 1 lb. \$5.97

(2) *6-in. Arc Joint® Water Pump Pliers (not shown).*
9 GT 4545—Shpg. wt. 8 oz. \$4.27

(3) *12 1/2-in. long, 7 position, 2 1/2-in. jaw cap.*
9 GT 45271—Shpg. wt. 1 lb. 7 oz. \$6.97

(4) *5-inch Ignition Pliers. Thin jaws at 40° angle, 3 position, 1 1/2-inch jaw capacity.*
ORDERING INFO: See warranty above.
9 GT 4513—Shpg. wt. 4 oz. \$2.27

(5) *16-in. Arc Joint Pliers. Heavy-duty. Plastic coated handles, 11 position, 4-inch jaw capacity.*
ORDERING INFO: See warranty above.
9 GT 45384—Shpg. wt. 2 lbs. 15 oz. \$10.97

(6) *Mechanics' Pliers. 10 1/2 in. long. 7 position, 2-inch jaw capacity.*
ORDERING INFO: See warranty above.
9 GT 45375—Shpg. wt. 1 lb. 1 oz. \$4.47

(6 and 7) Slip Joint Utility Pliers

Double curved jaws grip 3/16-inch stock or 1-inch pipe with same power. Has wire-cutting slotting slot.

SIZES, ORDERING INFORMATION: See Warranty above.

(6) *6 3/4 inches long. Knurled handle.*
Shipping weight 9 ounces.
9 GT 45372 \$2.97


6 3/4 inches long (not shown). Same as above but with vinyl grips.
9 GT 45378—Shpg. wt. 10 oz. \$3.27

(7) *8 inches long. Knurled handle.*
Shipping weight 14 ounces.
9 GT 45373 \$3.37

8 inches long (not shown). Same as 9 GT 45373 above, but has vinyl-clad grips.
Shipping weight 13 ounces.
9 GT 45379 \$3.67

(7) *5 3/4-in. long with thin nose.*
Shipping weight 7 ounces.
9 GT 45374 \$3.17

(8) *7-inch Battery Pliers*
Deep cut teeth for gripping 22° angle head. Two position, 1/2-inch jaw capacity.
ORDERING INFORMATION: See warranty above.
9 GT 44763—Shpg. wt. 8 oz. \$3.77

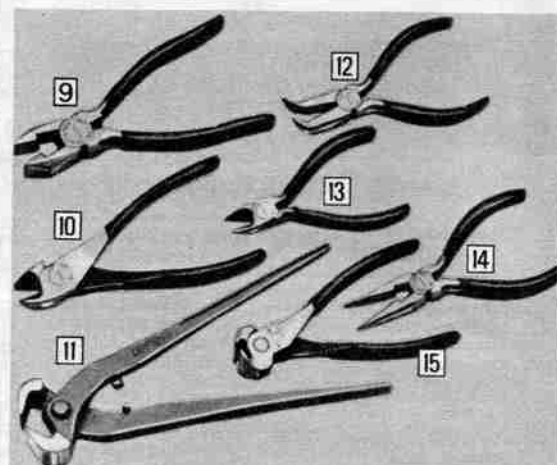

(9 thru 15) Solid-joint Pliers

CONSTRUCTION: High-carbon steel. Cutting edges induction-hardened. Plastic-coated handles, except Nippers (11).

(9) Lineman's Pliers. Beveled nose, side-cutting jaws.

SIZES, ORDERING INFO: See warranty above.

7-in. long, 1.35-in. jaw cap.
Shpg. wt. 13 oz.
9 GT 45091 \$7.27

8 1/2-in. long, 1.5-in. jaw cap.
Shpg. wt. 1 lb. 4 oz.
9 GT 45092 \$7.97

(10) *Wide-jaw Diagonal Cutting Pliers. Heavy-duty for cuts on steel wire, etc. 7 inches long. Wt. 10 oz.*

ORDER INFO: Warr. above.
9 GT 45074 \$6.67

(11) *Nail-cutting Nippers. Hand-honed cutting edges.*

SIZES, ORDERING INFO: See warranty above.

10 inches long. Wt. 15 oz.
9 GT 45241 \$6.97

14 in. long. Wt. 2 lbs. 5 oz.
9 GT 45231 \$7.97

(12) *Bent Needle-nose Pliers. Bend wire, retrieve small parts. 6 in. long. Wt. 7 oz.*

ORDER INFO: Warr., above.
9 GT 45083 \$6.47

(13) Diagonal Cutting Pliers. For switchboards, ignition systems.

SIZES, ORDERING INFO: See warranty above.

5-inch. Shpg. wt. 7 oz.
9 GT 45071 \$5.87

6-inch. Shpg. wt. 9 oz.
9 GT 45072 \$6.37

7-inch. Shpg. wt. 10 oz.
9 GT 45073 \$6.67

(14) *Long Chain-nose Pliers. Form wire loops, grip tiny pieces. Wide side cutters, long tapered jaws.*

SIZES, ORDERING INFO: See warranty above.

6-inch. Shpg. wt. 9 oz.
9 GT 45081 \$5.97


8-inch. Shpg. wt. 10 oz.
9 GT 45082 \$6.47

(15) *End-cut Nippers. Cut heavy wire, nails.*

SIZES, ORDERING INFO: See Warranty above.

6-inch. Shpg. wt. 9 oz.
9 GT 4502 \$6.97

7-inch. Shpg. wt. 12 oz.
9 GT 4504 \$7.77

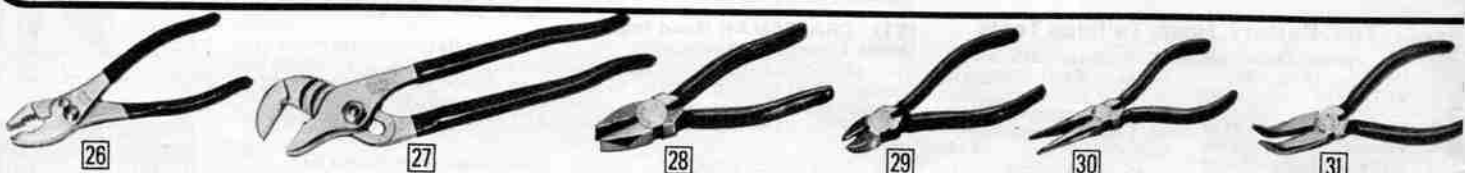

(26 and 27) Adjustable-joint Pliers

CONSTR: Drop-forged, hardened steel. Imported.

(26) Sears Slip-joint Pliers. Vinyl-covered handles. 2 position, 2.8-in. jaw capacity.

SIZES, ORDERING INFO:

6 inches long.
Shpg. wt. 8 oz.
9 GT 30701 \$1.77

8 inches long.
Shpg. wt. 8 oz.
9 GT 30702 \$2.07

(27) Sears Forged-groove Joint Pliers. Imported.

SIZES, ORDER INFO:

10-in. 5 pos. 1 1/2-in. jaw cap.
Shipping weight 1 lb. 8 oz.
9 GT 30723 \$4.37

12-in. 6 pos. 2-in. jaw cap.
Shipping weight 1 lb. 8 oz.
9 GT 30724 \$5.67

16-in. 11 pos. 4-in. jaw cap.
Shpg. wt. 2 lbs. 15 oz.
9 GT 30725 \$9.47

(28) Sears Lineman's Pliers. Bevel nose, honed side cutters. Polished head. Alloy steel; plastic-coated grips. Imported.

SIZES, ORDER INFO:

7 in. long, 1.35-in. jaw capacity. Wt. 12 oz.
9 GT 3079 \$4.47

8 in. long, 1.5-in. jaw cap. Wt. 1 lb. 1 oz.
9 GT 3080 \$4.97

(28 thru 31) Solid-Joint Pliers

(29) Sears Diagonal Cutting Pliers

Hardened edges, beveled and ground. High carbon steel with plastic-covered grips. Jaws open 1.2 inches capacity. 6 inches long. Imported.

ORDERING INFO: See warranty above.

Shpg. wt. 7 oz.
9 GT 3074 \$4.37

(30) Sears Long-nose Pliers

Polished head, side cutters. High carbon steel with plastic-covered grips. Jaws open 2.2 inches. Imported.

SIZES, ORDERING INFO:

6 in. long. Wt. 7 oz.
9 GT 3077 \$4.37

8-in. long. Wt. 9 oz.
9 GT 30771 \$4.77


(31) Sears Bent-nose Pliers

Hardened edges, beveled and ground for maximum durability. High carbon steel with plastic-covered handles. Measures 6-inches long. Imported.

ORDERING INFO: See warranty above.

Shpg. wt. 7 oz.
9 GT 3078 \$4.57

Hand Tool Warranty

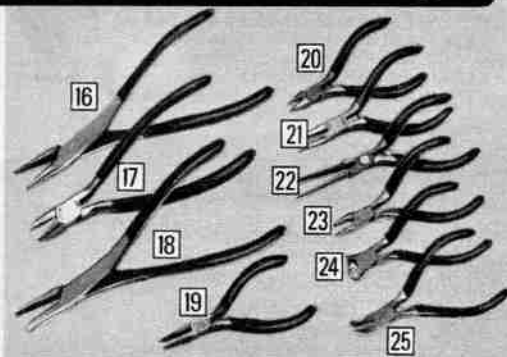

(16 thru 25) Precision Pliers

Save 10% when you buy two or more

(16 thru 18) Regular Precision Pliers. For intricate work on all electrical components. CONSTRUCTION: Long slender heads, thin tips for tight working areas. Edges hand-honed. Polished drop-forged steel . . . plastic-covered grips. TYPES, ORDER INFO: See warranty, opposite page.

(16) Round Needle-nose. 8 inches long. 9 GT 4505—Shipping weight 9 ounces. Each \$6.97 Price when you buy 2 or more . . . Each 6.27

(17) Thin-head diagonal. 7½ inches long. 9 GT 4539—Shipping weight 9 ounces. Each \$7.47 Price when you buy 2 or more . . . Each 6.72

(18) Duck-bill flat. 8 inches long. 9 GT 4509—Shipping weight 9 ounces. Each \$6.37 Price when you buy 2 or more . . . Each 5.73

(19 thru 25) "Mini" Precision Pliers. Professional type. For close delicate work. CONSTRUCTION: Cutting edge hand honed. Forged high carbon steel. Heat-treated and finely finished. Plastic covered grips. TYPES, ORDER INFO: See warranty, facing page.

(19) Long nose with cutter. 4½ inches long. 9 GT 45924—Shipping weight 7 oz. . . Each \$7.37 Price when you buy 2 or more . . . Each 6.63

(20) Flush-cut diagonal. 4½ inches long. 9 GT 45904—Shipping weight 7 oz. . . Each \$7.97 Price when you buy 2 or more . . . Each 7.17


(21) Flat nose. 4¾ inches long. 9 GT 45944—Shipping weight 7 oz. . . Each \$6.77 Price when you buy 2 or more . . . Each 6.09

(22) Extra-Long Nose. 5¾ inches long. 9 GT 45946—Shipping weight 8 oz. . . Each \$7.97 Price when you buy 2 or more . . . Each 7.17

(23) Round nose. 4½ inches long. 9 GT 45075—Shipping weight 5 oz. . . Each \$6.47 Price when you buy 2 or more . . . Each 5.82

(24) End-cutter. 4 inches long. 9 GT 4503—Shipping weight 5 oz. . . Each \$7.47 Price when you buy 2 or more . . . Each 6.72

(25) Bent-nose. 4½ inches long. 9 GT 45085—Shipping weight 5 oz. . . Each \$6.97 Price when you buy 2 or more . . . Each 6.27

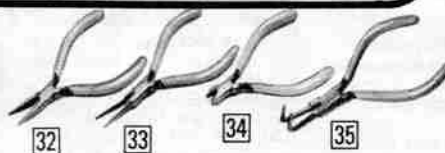

Sears Precision Pliers

(32 thru 35) Sears "Midget" Pliers. Let you work in tight places.

CONSTRUCTION: Cutter edge honed. Drop-forged high carbon steel, tempered and hardened. Vinyl-covered hand grips, 4 inches long. Imported. TYPES, ORDERING INFORMATION:


(32) Long-nose Pliers. 9 GT 30746—Shipping weight 5 ounces . . . Each \$3.97

(33) Needle-nose Pliers. 9 GT 30747—Shipping weight 6 ounces . . . Each 3.97

(34) Diagonal Cut Pliers. 9 GT 30748—Shipping weight 5 ounces . . . Each 3.97

(35) Bent-nose Pliers. 9 GT 30749—Shipping weight 6 ounces . . . Each 3.97

Heavy-duty
fence pliers




(36) Fence Pliers. Drive and pull staples, also use as a hammer. Cut, splice. Drop-forged steel 10¼-in. long. Imported. ORDER INFO: See warranty on opposite page. Shpg. wt. 1 lb. 9 oz. 9 GT 45226 . . . \$7.97

(37) Snap-Ring Pliers. Combination internal-external type. Steel. Plastic-covered grips. 4 pairs replacement tips; 2 pair straight, 1 pair 90°, 1 pair 45°. ORDERING INFORMATION: See warranty, opposite page. 9 GT 45358—Wt. 10 oz. \$7.47

Replacement tips for (37). ORDER INFO: Box of four pairs. 9 GT 4535—Wt. 3 oz. . . \$1.67

CRAFTSMAN® Specialty Pliers

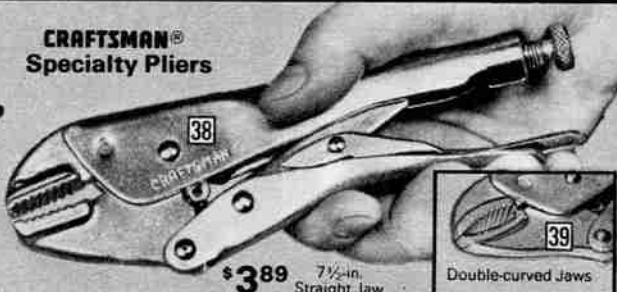

(38) Locking Plier-Wrench. Holds like pliers . . . locks like a vise. 10-in. size gives 2 tons of gripping power. **(38 and 39)** Does the work of pliers, clamps, gripping tool, pipe or locking wrench, adjustable wrench and portable vise. CONSTRUCTION: Cold-forged steel with serrated jaws, 7½-in. size gives you 1½ tons of gripping power. Lets you work in tight places. Thumb screw in handle adjusts jaw locking size. Squeeze handles to lock . . . slight upward pressure on release handle unlocks jaws. Strong spun rivet assembly. Nickel-plated to resist rust. TYPES, SIZES, ORDERING INFO: See warranty, opp. page.

Catalog Number	Maximum length	Locked Capacity	Open Capacity	Shipping weight	Price each
(38) With straight jaws.					
9 GT 45342	7½ in.	1¼ in.	1½ in.	1 lb. 1 oz.	\$3.89
9 GT 45341	10 in.	1½ in.	2 in.	1 lb. 8 oz.	4.39
(39) With double-curved jaws. Made for round stocks.					
9 GT 45964	7 in.	1¼ in.	1½ in.	1 lb. 1 oz.	3.99
9 GT 45961	10 in.	1½ in.	2 in.	1 lb. 7 oz.	4.69

Locking Plier Set, 1 ea. 7½, 10-in. straight jaw pliers (38). 9 GT 45348—Shipping weight 2 pounds 9 ounces. . . \$7.79

(40) Sears Ring Pliers. Used with 9 types of Truarc® retaining rings. Compress internal-type retaining rings or expand external. Alloy steel.

SIZES, ORDERING INFORMATION: Not Craftsman. 9 GT 45359—Small size. For 109 ring sizes. Shipping weight 5 oz. . . \$5.17 9 GT 45351—Large size. For 95 ring sizes. Shipping weight 8 oz. . . 5.47

(41 thru 46) Snips for cutting sheet metal, plastic

(41) Sears Straight-Cut Snips. For leather, rubber, too. Drop-forged steel, polished jaws. Hardened and tempered cutting edges.

SIZES, ORDER INFO: Not Craftsman. 7 in. long. Maximum cut 1¼ inches. 9 GT 45434—Wt. 10 oz. . . \$3.67 10 in. long. Maximum cut 2½ inches. 9 GT 45432—Wt. 1 lb. 3 oz. . . \$4.77 12 in. long. Maximum cut 3 inches. 9 GT 45431—Wt. 1 lb. 13 oz. . . \$6.27

(42) CRAFTSMAN Duckbill Snips. For screening and wire, too. Forged steel blades with fully hardened and tempered cutting edges. Plastic-coated handles.

SIZES, ORDER INFORMATION: See warranty, opposite page. 7 in. long. Maximum cut 1¼ in. 9 GT 45463—Shpg. wt. 10 oz. \$4.77 10 in. long. Maximum cut 2½ in. 9 GT 45461—Wt. 1 lb. 1 oz. . . \$6.27 12 in. long. Maximum cut 3 inches. 9 GT 45462—Wt. 1 lb. 13 oz. . . \$7.67

(43) CRAFTSMAN Thin-nose Snips. High carbon steel heat-treated. Polished jaws. Plastic-coated handles. 6 in. long. Maximum cut 1¼ inches.

ORDERING INFO: See warranty, opposite page. 9 GT 45441—Shpg. wt. 7 oz. . . \$5.27

(44 thru 46) CRAFTSMAN Compound-leverage Snips. Compound leverage gives 12-to-1 power ratio to cut with ½ the effort of regular snips.

CONSTRUCTION: Forged alloy-steel, heat-treated and hardened. Chrome-plated blades, serrated edges. 10 in. long with 1¾-in. maximum cut. Vinyl plastic hand guard grips. Color-coded lock arm, see below.

SIZES, ORDER INFO: Warranty, p. 112. **(44) For straight cuts.** Yellow. 9 GT 4275—Wt. 1 lb. 1 oz. . . \$7.97 **(45) For left cuts.** Red. 9 GT 4274—Wt. 1 lb. 1 oz. . . \$7.97 **(46) For right cuts.** Green. 9 GT 4273—Wt. 1 lb. 1 oz. . . \$7.97

Sears Rod and Bolt Cutters and Replacement Heads

(47) Long-handled Cutters. Chrome molybdenum alloy steel jaws with compound cutting action for cutting soft, medium hard bolts. Vinyl-covered grips. Center cut. Imported.

ORDERING INFORMATION: Not Craftsman. 24-inches long. Cuts through ¾-inch diameter soft or medium hard bolts. 9 GT 6566C—Shpg. wt. 8 lbs. . . \$23.97 18-inches long. Cuts through ½-inch diameter soft or medium hard bolts. 9 GT 6564—Shpg. wt. 4 lbs. 6 oz. . . \$19.97 14-inches long. Cuts through ¼-inch diameter soft or hard medium hard bolts. 9 GT 6565—Shpg. wt. 3 lbs. 1 oz. . . \$15.97

Replacement Heads for Rod and Bolt Cutters (not shown).

TYPES, ORDERING INFO: For 9 GT 6566C. Shpg. wt. 1 lb. 14 oz. 9 GT 6563 . . . \$9.97 For 9 GT 6564. Shpg. wt. 1 lb. 6 oz. 9 GT 6568 . . . \$7.47 For 9 GT 6565. Shipping weight 1 pound. 9 GT 6561 . . . \$6.97

Lubricants for maintaining your valuable tools

(48) Light Machine Oil. Non-corrosive, light-duty oil in 1-quart can.

ORDERING INFORMATION: 9 GT 55941—Wt. 2 lbs. 7 oz. . . \$1.97

(49) CRAFTSMAN Pump Oil. Nickel-plated steel. 1-pc. dome, seamless bottom. 8½-in. spout. 14-oz. cap.

ORDERING INFORMATION: See warranty, opposite page. 9 GT 5582—Shpg. wt. 14 oz. . . \$2.97

(50 and 51) WD-40 all-purpose Lubricant. Good for keeping tools lubricated. Helps prevent rust.

ORDERING INFORMATION: **(50) 9-ounce Spray Can.** Shipping weight 1 lb. 1 oz. 9 GT 55777 . . . \$1.66


(51) 1-gallon Can. Shipping weight 8 lbs. 2 oz. 9 GT 55782 . . . \$7.47





CRAFTSMAN® Screwdrivers

Save when you buy in sets. Choose from 4 to 30-piece sets. All backed by our Full, Unlimited Warranty... see page 116

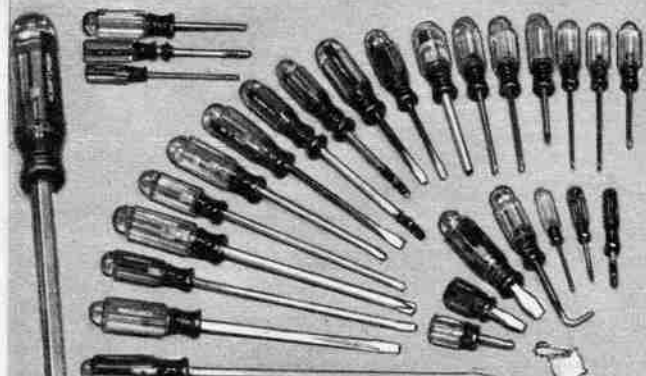

30-pc. Set \$49.97 20-pc. Set \$34.97 9-pc. Set \$17.47 6-pc. Set \$7.97 4-pc. Set \$5.97

CONSTRUCTION: Chrome-vanadium alloy steel blades. Nickel-chrome plated. Heat-treated for maximum durability. Flat blades fully ground on all sides of the head for accurate performance. Slotted blades have square shafts. Phillips blades have round shafts. Butyrate plastic, color-coded handles for easy identification. Fluted handle and grooved thumb rest for added control. Handles proportioned to blade size.

30-piece Screwdriver Set

Separate prices total \$68.35.

SIZES: 10 slotted (1/8x4, 3/16x4, 1/4x4, 1/4x6, 1/4x12, 5/16x1 1/4, 5/16x8, 3/8x12, 1/2x1 1/4). 7 Phillips: Nos. 0 (2 1/2-in.), 1 (3-in.), 2 (4-in.), 2 (8-in.), 3 (6-in.), 4 (8-in.). No. 2 stubby. 1 Reed Prince. 4 screw-holding slotted types (1/8x4, 1/8x2 1/2, 3/16x5, 3/16x7-in.). Pocket clip (1/8x2-in.). 4-way pocket screwdriver, screw-starter, scratch awl, magnetic-tip, cotter key extractor, 2 clutchheads (3/32, 3/16).

ORDER INFO: See Warranty on pg. 116. 9 GT 41081—Wt. 6 lbs. 2 oz. ...Set \$49.97

20-piece Screwdriver Set

Separate prices total \$46.02.

SIZES: 11 slotted (1/8x2, 1/8x4, 3/16x4, 3/16x6, 1/4x4, 1/4x6, 1/4x12, 5/16x1 1/4, 5/16x8, 3/8x12, 1/2x1 1/4-in.). 7 Phillips: Nos. 0 (2 1/2-in.), 1 (3-in.), 2 (4-in.), 2 (8-in.), 3 (6-in.), 4 (8-in.). 1 Reed Prince. One 1/8x4-in. screw-holding slotted type.

ORDER INFO: See Warranty on pg. 116. 9 GT 41082—Wt. 4 lbs. 15 oz. ...Set \$34.97

9-piece Screwdriver Set


Separate prices total \$20.03.

SIZES: 5 slotted (1/8x4, 3/16x4, 1/4x4, 1/4x6, and 3/8x12-in.). 4 Phillips: Nos. 0 (2 1/2-in.), 1 (3-in.), 2 (4-in.), 3 (6-in.).

ORDER INFO: See Warranty on pg. 116. 9 GT 41089—Wt. 2 lbs. 14 oz. ...Set \$17.47

Individual Screwdrivers

Standard, Phillips or Reed Prince

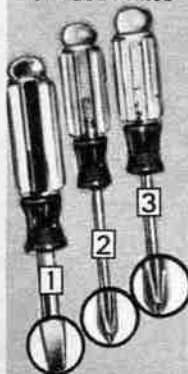

(1) Standard Screwdrivers

SIZES, ORDER INFO: Fit regular-slotted screws.

Catalog Number	Blade inches	For screws	Wt. oz.	Each
9 GT 41589	1/8x4	Ex. small	3	\$1.57
9 GT 41581	3/16x4	Small	5	1.77
9 GT 41582	1/4x4	Small	5	2.27
9 GT 4151	1/4x1 1/2	Medium	4	1.57
9 GT 41583	1/4x4	Medium	6	1.97
9 GT 41584	1/4x6	Medium	7	2.27
9 GT 41585	1/4x12	Medium	8	2.97
9 GT 41586	5/16x1 1/4	Large	6	2.77
9 GT 41587	5/16x8	Large	9	3.17
9 GT 41588	3/8x12	Ex. large	14	4.27

(2) Phillips Screwdrivers

SIZES, ORDER INFO: Fit cross-slotted screws.

Catalog No.	Size	For screws	Blade	Wt.	Each
9 GT 41293	0	Ex. small	2 1/2 in.	3 oz.	\$1.57
9 GT 41294	1	Small	3 in.	4 oz.	1.77
9 GT 4118	2	Medium	1 3/4 in.	4 oz.	1.87
9 GT 41295	2	Medium	4 in.	4 oz.	1.97
9 GT 41296	2	Medium	8 in.	6 oz.	2.37
9 GT 41297	3	Large	6 in.	7 oz.	2.57
9 GT 41298	4	Ex. large	8 in.	10 oz.	3.47

(3) Craftsman® Reed Prince Screwdriver

For cross-recessed screws. 1/4x4-inch blade.

ORDERING INFORMATION:

9 GT 4114—Shipping weight 5 ounces\$2.07

Specialty Screwdrivers

(4) CRAFTSMAN® Pocket-clip Screwdriver

SIZE, ORDER INFO: 1/8x2-in. blade. Std. bit. 4 in. long. 9 GT 41421—Wt. 3 oz. ...\$1.27

(5) CRAFTSMAN® Ratchet Offset Screwdriver

Nickel-plated steel body, alloy steel blades. Reverses. **SIZES, ORDERING INFO:**

1/4 and 3/8-inch bits. 9 GT 4117—Wt. 4 oz. ...\$2.17

Nos. 1 and 2 Phillips bits. 9 GT 4119—Wt. 4 oz. ...\$2.97

No. 2 Phillips, 1/4-inch bits. 9 GT 4116—Wt. 4 oz. ...\$2.77

(6) CRAFTSMAN® Offset Screwdriver

Use in tight places. Four 1/4-inch chrome-vanadium alloy steel blades.

ORDERING INFORMATION: Shipping weight 6 oz. 9 GT 4110\$2.77

(7) CRAFTSMAN® Screw-holding Drivers

Thumb control holds screws for one-hand use.

SIZES, ORDERING INFO:

Catalog Number	Blade Size inch	Wt. oz.	Each
9 GT 41122	1/8x2 1/2	3	\$2.27
9 GT 41123	1/8x4	4	2.49
9 GT 41124	3/16x5	5	2.67
9 GT 41125	3/16x7	6	2.97

(8) CRAFTSMAN® Wedge-type Screw-holding Drivers

Adjusts to wedge firmly in slot. Fits sunken screws. Need clearance of screw head.

SIZES, ORDERING INFO:

1/8x3-inches 9 GT 41201—Wt. 3 oz. ...\$2.47

3/16x4-inches 9 GT 41202—Wt. 4 oz. ...\$2.77

1/2x6-inches 9 GT 41204—Wt. 6 oz. ...\$2.97

(9) CRAFTSMAN® Screw-holding Starter

Starts most sizes of standard slotted screws. Alloy steel blade and bit. Aluminum handle. Magnetic pick-up tip on handle.

SIZES, ORDERING INFO:

5 5/8 inches long 9 GT 41024—Wt. 3 oz. ...\$2.27

9 5/8 inches long 9 GT 41025—Wt. 4 oz. ...\$2.47

(10) CRAFTSMAN® Screw Starter

Double lead threaded point for easy penetration of material. High-carbon steel blade.

ORDERING INFO: Wt. 5 oz. 9 GT 41026\$1.77

(11) CRAFTSMAN® 4-in-1 Screwdriver Set

Butyrate handle. 2 reversible combination blades. 6 1/2 inches long.

SIZES: Nos. 1, 2 Phillips type; 1/4, 3/16-inch standard ends.

ORDERING INFO: Wt. 7 oz. 9 GT 41504Set \$4.47

(12) CRAFTSMAN® 4-in-1 Screwdriver

4 different tips on 2 reversible combination blades.

SIZES: Robertson Nos. 0, 1, 2, 3.

ORDERING INFO: Wt. 7 oz. 9 GT 41505\$4.47

(13) CRAFTSMAN® Clutch Head Screwdrivers

Precision milled tip insures good fit.

SIZES, ORD. INFO: Wt. 4 oz. 9 GT 41135—3/32-in. ...\$2.67

9 GT 41136—1/16-in. 2.77

(14) CRAFTSMAN® Magnetic-tip Screwdriver

Permanent magnet holds tips and screws in place for starting. Chrome-vanadium alloy steel tips. Aluminum shank. Hollow butyrate handle stores bits. 8 inches long.

SIZES: 4 steel bits (3/16, 3/32-inch standard; Nos. 1, 2 Phillips).

ORDERING INFORMATION: Shipping weight 8 ounces. 9 GT 41467\$3.97

Replacement Bit Set for (14)

ORDER INFO: Shpg. wt. 4 oz. 9 GT 41468Set \$1.97

(15) CRAFTSMAN® 6-pc. Precision Screwdriver Set

Precision ground. Nickel-plated steel handle. Blades held in threaded chuck. Case included.

SIZES: 5 blades (.040, .055, .070, .100-in. and Phillips type).

ORDER INFO: Shpg. wt. 4 oz. 9 GT 4107Set \$2.67

(16) CRAFTSMAN® Auto-return Screwdriver

19 1/2 in. extended. Forward and reverse drive. Chrome-plated metal parts. Textured plastic handle.

SIZES: 3 alloy steel bits (No. 2 Phillips, 1/4, 3/32-in.).

ORDERING INFORMATION: Shipping weight 1 lb. 3 oz. 9 GT 3103\$13.97

Replacement Bit Set for (16)

ORDERING INFO: Imported. Shipping weight 5 ounces. 9 GT 4198Set \$1.97

3-pc. Phillips-type Replacement Bit Set

Fits (16), former 9-3470, 9-3101, other automatic screwdriver brands.

SIZES: Nos. 1, 2, 3 Phillips, 3/32-in. shanks.

ORDERING INFO: Imported. Shipping weight 4 ounces. 9 GT 4115Set \$2.47

(17) CRAFTSMAN® Small Auto-return Screwdriver

10 in. extended. Forward and reverse drive. Locks when closed. Nickel-plated metal parts. Plastic handle.

SIZES: 4 bits (5/64, 3/64 and 1/4-in.; No. 2 Phillips).

ORDERING INFORMATION: 9 GT 3102—Wt. 11 oz.\$7.47

3-piece Bit Set

For (17) and former 9-3180, 9-3461, 9-3100.

SIZES: 3/32, 1/32-in., No. 2 Phillips type.

ORDERING INFO: Imported. 9 GT 4153—Wt. 4 oz. ...Set \$1.97

(18) Auto-return Screwdriver

10 1/2 in. extended. Carbon-steel blades. Spring action return, blade spirals left or right. Handle compartment holds bits.

SIZES: 6 bits (5/64, 3/64, 1/4-in. drill bits, 3/16, 1/4-in., No. 2 Phillips type).

ORDERING INFORMATION: Not Craftsman. Imported. 9 GT 3105—Wt. 14 oz.\$5.97

Replacement Bit Set for (18)

ORDERING INFO: Imported. 9 GT 3106—Wt. 4 oz. ...Set \$1.27

(19) Emergency Repair Kit

Plastic handle with 1/8, 3/16, 1/4-in., Phillips Nos. 1, 2 screwdriver bits; offset; 6-in. slip-joint pliers; 6-in. adj. wrench; 5-in. nose pliers. Pouch. Imported.

ORDER INFO: Not Craftsman. Shipping weight 1 lb. 8 oz. 9 GT 41877\$8.97

(20) CRAFTSMAN® Cotter Key Puller

Chrome-plated steel hook. Heat treated for durability.

ORDERING INFORMATION: Shipping weight 8 ounces. 9 GT 4319\$1.77

\$13.97

Screw Ball® Ratcheting Screwdriver and Socket Driver Set

- 6 Screwdriver Bits... 3 Phillips and 3 slotted
- 5 Sockets... 3/16, 1/4, 5/16, 3/8 and 7/16-inch, plus adapter

Look at these extra-convenience features...

Built-in magnet holds screwdriver bit securely in shank. Magnetizes tip... screws are not dropped or lost

3-position ratchet control for forward, reverse and lock

3 extra bits are stored in the handle for use when needed

2-in. diameter, ball-shaped handle can give fast, increased turning power

Screw Ball® built-in ratchet driver works faster than regular screwdrivers because its large diameter handle allows increased turning power. It's smooth ratchet action keeps screwdriver bits firmly in place on the screw... eliminates gouges.

CONSTRUCTION: Plastic, 2-inch handle. Shank and bits of high quality, heat-treated steel. Built-in magnet... magnetizes tip. 3-position ratchet control.

SET COMPOSITION: Six screwdriver bits: 3 slotted, 3 Phillips type (Nos. 1, 2, 3); 5 sockets (3/16 thru 7/16-in.), adapter, instructions.

ORDERING INFORMATION:

Shipping weight 1 lb. 2 oz.
9 GT 3107.....Kit \$13.97

Screw Ball® Ratchet Driver alone

2 slotted, 2 Phillips-type bits, instructions.

ORDERING INFORMATION:

9 GT 3104—Shpg. wt. 10 oz.....\$8.97

Sears Screwdriver Sets



6-piece
Standard Set \$4.97

CONSTRUCTION: Chrome-vanadium steel, double nickel-plated for rust prevention. Butyrate plastic handles.

SIZES: Standard (1/4x3 1/2, 3/16x4, 1/4x6-in.); Phillips-type (Nos. 0, 1 and 2).

ORDERING INFO: Wt. 15 oz.
9 GT 41449.....Set \$4.97

8-piece
Standard Set \$3.97

CONSTRUCTION: Nickel-plated, carbon-steel blades. Hardened and tempered. Plastic handles, vinyl grips.

SIZES: Standard (1/4x2, 3/16x5, 1/4x5, 3/16x6-in.); (1/4x2 1/2-in., stubby); Phillips-type (Nos. 1, 2); offset.

ORDER INFO: Offset is imported.

Shipping weight 1 lb. 7 oz.
9 GT 41273.....Set \$3.97

Sears Nut Driver/Screwdriver Sets

10-pc. Recreational Vehicle Tool Set

CONSTRUCTION: Blades hardened and tempered. Plastic handles.

SIZES: 4 slotted screwdrivers: 1/4, 3/16, 1/8, 5/32-in. 1/4-in. nut driver, 1 and 2 square recess. Nos. 1 and 2 Phillips type. 5/32-in. clutch head. Plastic case.

ORDERING INFORMATION: Imported.
9 GT 45114—Wt. 1 lb.....Set \$5.97

10-pc. Nut Driver/Screwdriver Set

CONSTRUCTION: Blades hardened and tempered. Plastic handles.

SIZES: 5 nut drivers: 3/16, 1/4, 5/16, 11/32, 3/8-in. 3 screwdrivers: 1/8, 3/16, 1/4-in. flat-edge; Nos. 1, 2 Phillips. Plastic case.

ORDERING INFO: Imported.
9 GT 45113—Wt. 1 lb.....Set \$5.97

\$5.97

\$5.97



(1 thru 4) Sears Standard, Metric Wrench Sets

CONSTRUCTION: Nickel-chrome plated, select steel accurately broached and heat-treated for strength. Highly polished heads. 12-point box-end openings. Plastic pouch. Not Craftsman. Imported.

TYPES, SIZES, ORDER INFO: Metric set 3 not offset as shown.

Type	Size of openings (all 6-piece Sets except (4), 3-piece Set)	Catalog Number	Wt. lbs. oz.	Price Set
(1) Combination Wrench Sets				
Std.	3/8, 7/16, 1/2, 5/8, 11/16 in.	9GT4390	1 3/4	\$4.88
Met.	7, 10, 11, 12, 13, 14mm	9GT43702	1 1/4	4.88
(2) Open-end Wrench Sets				
Std.	1/4x3/16, 3/8x7/16, 1/2x1/2, 5/8x5/8, 3/4x3/4, 11/16x7/8	9GT4386	1 1/2	4.88
Met.	in. 6x8, 7x9, 10x11, 12x14, 13x15, 17x19mm	9GT4383	1 1/4	4.88
(3) Box-end Wrench Sets				
Std.	1/4x3/16, 3/8x7/16, 1/2x1/2, 5/8x5/8, 3/4x3/4, 11/16x7/8	9GT4387	2 3/4	7.88
Met.	in. 6x8, 7x9, 10x11, 12x14, 13x15, 17x19mm	9GT4384*	1 6/8	7.88
(4) Short Box-end Wrench Set				
Std.	3/8x7/16, 1/2x1/2, 5/8x5/8	9GT4351	1 11/16	2.88

CRAFTSMAN® Wrenches... see page 116

Sears Socket Wrench Sets in STANDARD or METRIC sizes... ideal for home and car repairs

CONSTR: All steel sockets, wrenches, ratchets and ratchet accessories are heat treated. They meet federal specifications for torque strength. Chrome-plated for rust, corrosion resistance. Dimensionally accurate. Not Craftsman®. Imported.

1/4 and 3/8-inch Square Drive
42-pc. Standard and Metric Set \$17.66 set

SET COMPOSITION:

1/4-in. Sq. Drive: 9 standard sockets (3/16, 7/32, 1/4, 5/32, 3/16, 11/32, 3/8, 7/16, 1/2-in.) and 9 metric sockets (4, 5, 6, 7, 8, 9, 10, 11, 12mm). 1/4-in. spinner handle.

3/8-in. Sq. Drive: 8 standard sockets (3/8, 7/16, 1/2, 5/8, 3/4, 1 1/8, 1 1/4, 1 1/2-in.) and 8 metric sockets (10, 11, 12, 13, 14, 15, 16, 17mm). 3/8-in. reversible ratchet.

Misc. Parts: Socket adapter (3/8 to 1/4-in.); 3/8-in. speeder disc; 3-in. extension bar, 5/8 and 13/16-in. spark plug sockets. Steel case.

ORDERING INFORMATION: Imported.
9 GT 4394—Shpg. wt. 5 lbs. 10 oz.....Set \$17.66

3/8-inch Square Drive Ratchet

Meets federal specifications for torque strength. Reversing lever changes direction.

ORDERING INFORMATION: Imported.
9 GT 43786—Shpg. weight 14 oz.....\$6.99

Spark Plug Sockets. 6-point opening.

SIZES. ORDERING INFORMATION: Imported.
9 GT 44212—5/8-in. Shpg. wt. 6 oz.....\$1.39

9 GT 44213—13/16-in. Shpg. wt. 8 oz.....1.39

1/4 and 3/8-inch Square Drive
23-pc. Standard or Metric Sets \$12.66 set

23-piece Standard Set

SET COMPOSITION: 1/4-inch Sq. Drive: 9 sockets (3/16 thru 1/2-inch); 6-inch spinner handle. 3/8-in. Sq. Drive: 7 sockets (3/8 thru 3/4-inch); 5/8-inch spark plug socket; reversible ratchet; speeder disc; socket adapter (3/8 to 1/4-inch); 3-inch extension bar; steel case.

ORDERING INFORMATION:
9 GT 4392—Shpg. wt. 3 lbs. 13 oz.....Set \$12.66

23-piece Metric Set

SET COMP: As above, but with nine 1/4-in. sockets (4 thru 12mm); seven 3/8-in. sockets (10 thru 16mm).

ORDERING INFORMATION:
9 GT 4393—Shpg. wt. 3 lbs. 13 oz.....Set \$12.66

3/8-inch Square Drive
12-pc. Standard or Metric Sets \$9.66 set

12-piece Standard Set

SET COMPOSITION: Seven sockets (3/8 thru 3/4-in.); reversible ratchet; 5/8-in. spark plug socket; speeder disc; 3-in. extension bar. Steel case.

ORDERING INFORMATION:
9 GT 4397—Shpg. wt. 2 lbs. 9 oz.....Set \$9.66

12-piece Metric Set

SET COMPOSITION: Seven sockets (9 thru 15mm); reversible ratchet; 5/8-in. spark plug socket; speeder disc; 3-in. extension bar. Steel case.

ORDERING INFORMATION:
9 GT 4398—Shpg. wt. 2 lbs. 9 oz.....Set \$9.66

Craftsman® Socket Wrench Sets
begin on page 120





Open-end, Box-end and Combination Wrenches
Choose **STANDARD** or **METRIC** sizes — all nickel-chrome
plated to resist rust, drop-forged to withstand
pressure at greatest stress points



STANDARD Open-end
Wrench Sets
\$64.99
12-piece

STANDARD Box-end
Wrench Sets
\$33.99
10-piece

(1) Open-end Wrenches in **STANDARD** or **METRIC** sizes

STANDARD Open-end Sets

12-piece Set
Separate prices total \$74.58.
SET INCLUDES: Sizes 1/4x3/16, 3/8x7/16,
1/2x9/16, 5/16x5/8, 3/4x1, 11/16x1 1/8, 1 1/4x1 3/8, 1 3/8x1 1/2,
1 1/2x1 5/8-in.

ORDERING INFORMATION: See con-
struction features described on oppo-
site page and warranty below.
9 GT 4403—Wt. 11 lbs. 1 oz. ...Set \$64.99

9-piece Set
Separate prices total \$33.61.

SET INCLUDES: Sizes 1/4x3/16, 3/8x7/16,
1/2x9/16, 5/16x5/8, 3/4x1, 1 1/4x1 3/8, 1 3/8x1 1/2,
1 1/2x1 5/8-in. Includes pouch.

ORDERING INFORMATION: See con-
struction features described on oppo-
site page and warranty below.
9 GT 4452—Wt. 3 lbs. 12 oz. ...Set \$27.50

6-piece Set
Separate prices total \$21.84

SET INCLUDES: Sizes 1/4x3/16, 3/8x7/16,
1/2x9/16, 5/16x5/8, 3/4x1, 1 1/4x1 3/8-in. In-
cludes plastic storage pouch.

ORDER INFO: Construction features on
opposite page, warranty below.
9 GT 4451—Wt. 2 lbs. 7 oz. ...Set \$16.50

Individual Open-end Wrenches

SIZES, ORDERING INFORMATION: See
construction features described on
opposite page and warranty below.

Catalog Number	Opening Size, in.	Length inches	Wt. lbs. oz.	Each
9 GT 44571	1/4x3/16	4 1/2	...	3 \$1.99
9 GT 44572	3/8x7/16	5 3/8	...	3 2.19
9 GT 44579	1/2x9/16	6 1/8	...	5 2.39
9 GT 44592	5/16x5/8	7	...	10 2.79
9 GT 44582	3/4x1	7 1/2	...	8 3.39
9 GT 44591	1 1/4x1 3/8	8 5/8	...	10 4.09
9 GT 44584	1 3/8x1 1/2	9 5/8	...	10 4.59
9 GT 44585	1 1/2x1 5/8	10 1/2	...	14 5.19
9 GT 44586	1 3/4x1 3/4	12	...	2 6.99
9 GT 44587	1 1/2x1 5/8	14 1/2	...	2 11.99
9 GT 44588	1 3/4x1 3/4	16 1/4	...	2 13.99
9 GT 44589	1 1/2x1 5/8	17 1/2	...	2 14.99

METRIC Open-end Sets

12-piece Set
Separate prices total \$61.68.
SET INCLUDES: Sizes 10x11, 12x14,
13x15, 16x18, 17x19, 20x22, 21x23,
22x24, 24x26, 25x27, 28x30,
30x32mm.

ORDERING INFORMATION: See con-
struction features on opposite page
and warranty below.
9 GT 4405—Wt. 8 lbs. 1 oz. ...Set \$54.99

9-piece Set
Separate prices total \$29.51.

SET INCLUDES: 6x8, 7x9, 10x11,
12x14, 13x15, 16x18, 17x19, 20x22,
22x24mm. Includes plastic pouch.

ORDER INFO: Construction features
on opposite p., warranty below.
9 GT 4293—Wt. 2 lbs. 14 oz. ...Set \$25.50

6-piece Set
Separate prices total \$17.14.

SET INCLUDES: Sizes 6x8, 7x9, 10x11,
12x14, 13x15, 17x19mm; pouch.

ORDER INFO: Construction features
on opposite p., warranty below.
9 GT 44501—Wt. 1 lb. 3 oz. ...Set \$16.50

Individual Open-end Wrenches

SIZES, ORDERING INFORMATION:
See construction features on opposite
page, warranty below.

Catalog Number	Size (mm.)	Length (in.)	Wt. lbs. oz.	Each
9 GT 44502	6x8	4 1/2	...	3 \$2.39
9 GT 44503	7x9	5	...	4 2.49
9 GT 44504	10x11	5 3/8	...	4 2.59
9 GT 44506	12x14	6 1/8	...	7 2.79
9 GT 44507	13x15	7	...	6 3.19
9 GT 44521	16x18	7 3/4	...	7 3.39
9 GT 44508	17x19	8 1/8	...	8 3.69
9 GT 44522	20x22	9 1/2	...	11 4.19
9 GT 44523	21x23	10 1/8	...	15 4.39
9 GT 44509	22x24	10 3/8	...	13 4.79
9 GT 44515	24x26	11 1/8	...	5 5.19
9 GT 44516	25x27	11 3/8	...	1 2 5.69
9 GT 44518	28x30	12 1/8	...	5 10.39
9 GT 44519	30x32	13 1/2	...	1 11 11.39

(2) Box-end Wrenches in **STANDARD** or **METRIC** sizes

STANDARD Box-end Sets

10-piece Set
Separate prices total \$38.20.
SET INCLUDES: Sizes 1/4x3/16, 3/8x7/16,
1/2x9/16, 5/16x5/8, 3/4x1, 1 1/4x1 3/8, 1 3/8x1 1/2,
1 1/2x1 5/8-in.; plastic storage pouch.

ORD INFO: Construction features on
opposite page, warranty below.
9 GT 4463—Wt. 5 lbs. 11 oz. ...Set \$33.99

6-piece Set
Separate prices total \$22.04.

SET INCLUDES: Sizes 1/4x3/16, 3/8x7/16,
1/2x9/16, 5/16x5/8, 3/4x1, 1 1/4x1 3/8-in.;
plastic storage pouch.

ORD INFO: Construction features on
opposite page, warranty below.
9 GT 4461—Wt. 3 lbs. 4 oz. ...Set \$18.50

Individual Box-end Wrenches

SIZES, ORDERING INFORMATION:
See construction features on opposite
page, warranty below.

Catalog Number	Opening Size, inches	Length inches	Wt. lbs. oz.	Each
9GT43919	1/4x3/16	7 1/8	...	3 \$2.19
9GT43922	3/8x7/16	7 3/4	...	4 2.29
9GT43921	1/2x9/16	8 1/8	...	5 2.49
9GT43923	5/16x5/8	9 1/8	...	5 2.89
9GT43924	3/4x1	9 3/4	...	6 3.19
9GT43926	1 1/4x1 3/8	10 1/2	...	7 3.59
9GT43927	1 3/8x1 1/2	11 7/8	...	8 3.89
9GT43928	1 1/2x1 5/8	12 3/8	...	10 4.39
9GT43929	1 3/4x1 3/4	15 3/8	...	13 5.39
9GT43934	1 1/2x1 5/8	17 1/8	...	1 10 7.89
9GT43935	1 3/4x1 3/4	18 1/8	...	2 10.49
9GT43936	1 1/2x1 5/8	22 1/2	...	2 8 15.99

Short Box-end Wrenches in **STANDARD** sizes

3-piece Set
SET INCLUDES: Sizes 3/8x7/16,
1/2x9/16, 5/8x1-in.; plastic pouch.

ORDERING INFORMATION: See
construction features on opposite
page and warranty below.
9 GT 4365—Wt. 8 oz. ...Set \$7.99

METRIC Box-end Sets

10-piece Set
Separate prices total \$41.50.
INCL.: Sizes 6x8, 7x9, 10x11, 12x14,
13x15, 16x18, 17x19, 20x22, 21x23,
22x24mm; plastic storage pouch.

ORD INFO: Construction features on
opposite page, warranty below.
9 GT 4465—Wt. 4 lbs. 5 oz. ...Set \$33.99

6-piece Set
Separate prices total \$22.04.

SET INCLUDES: Sizes 6x8, 7x9, 10x11,
12x14, 13x15, 17x19mm; pouch.

ORDERING INFORMATION: See con-
struction features on opposite page
and warranty below.
9 GT 42951—Wt. 1 lb. 3 oz. ...Set \$18.50

Individual Box-end Wrenches

SIZES, ORDER INFO: See construction
features on opposite page, war-
ranty below.

Catalog Number	Size (mm)	Length (in.)	Shpg. wt. lbs. oz.	Price each
9 GT 42952	6x8	7	...	3 \$2.89
9 GT 42953	7x9	7 3/4	...	4 3.19
9 GT 42954	10x11	7 1/8	...	4 3.49
9 GT 42956	12x14	9 1/8	...	5 3.79
9 GT 42957	13x15	9 3/8	...	6 4.09
9 GT 42961	16x18	10 1/2	...	8 4.29
9 GT 42958	17x19	11 3/8	...	7 4.59
9 GT 42965	20x22	11 3/8	...	13 4.89
9 GT 42966	21x23	12 1/8	...	14 4.99
9 GT 42969	22x24	13 1/8	...	10 5.29
9 GT 44963	25x28	14 3/8	...	1 4 7.19
9 GT 44965	27x30	15 3/8	...	1 4 7.99
9 GT 44966	28x32	16 3/8	...	1 7 8.29
9 GT 44967	30x32	17	...	1 12 9.39

Individual Wrenches.

ORDER INFO: See construction features
on opposite page, warranty below.

Catalog No.	Size	Length	Wt.	Each
9 GT 43863	3/8x7/16 in.	4 3/8 in.	3 oz.	\$2.49
9 GT 43861	1/2x9/16 in.	5 1/2 in.	4 oz.	2.59
9 GT 43862	3/4x1 in.	6 3/8 in.	5 oz.	2.79

Watch for our **STANDARD** and **METRIC** Logos
on the next 12 pages. They will help you identify at a glance
tools that are the proper size to meet your needs

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS
If any CRAFTSMAN® Hand Tool ever fails to give complete satisfaction, return it to the
nearest Sears store throughout the U.S. and Sears will replace it, free of charge. This war-
ranty gives you specific rights, and you may also have other rights which vary from state to state.

Here's what makes these Wrenches so outstanding. Drop-forged to provide strength at points of greatest stress. Select alloy steel construction for the toughness needed to loosen stubborn nuts and bolts. Heat-treated, then oil-quenched and tempered to uniformly "through-harden" so there are no inner soft spots.

Nickel-chrome plating adds rust and corrosion resistance. Matte finish helps provide firm grip. Sizes stamped into each wrench for easy identification. And you'll never have to pay for replacing any CRAFTSMAN® Wrench...we back them with our famous full unlimited warranty—see opposite page.



(3) Combination Wrenches in STANDARD and METRIC sizes

They do the jobs of both open-end and box-end wrenches

STANDARD Combination Wrench Sets

16-piece Set

Separate prices total \$70.54.

SET INCLUDES: Sizes $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$, $\frac{11}{16}$, $\frac{3}{4}$, $\frac{13}{16}$, $\frac{7}{8}$, $\frac{15}{16}$, 1, $1\frac{1}{16}$, $1\frac{1}{8}$, $1\frac{1}{4}$ -in.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 44968—Shpg. wt. 9 lbs. 15 oz.Set \$55.99

14-piece Set

Separate prices total \$66.66.

SET INCLUDES: Sizes $\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$, $\frac{11}{16}$, $\frac{3}{4}$, $\frac{13}{16}$, $\frac{7}{8}$, $\frac{15}{16}$, 1, $1\frac{1}{16}$, $1\frac{1}{8}$, $1\frac{1}{4}$ -in. Plastic storage pouch included.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 44964—Shpg. wt. 10 lbs. 8 oz.Set \$53.99

10-piece Set

Separate prices total \$35.90.

SET INCLUDES: Sizes $\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$, $\frac{11}{16}$, $\frac{3}{4}$, $\frac{7}{8}$, $\frac{15}{16}$, 1-inch. Plastic storage pouch included.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 4496—Shpg. wt. 4 lbs.Set \$30.99

6-piece Set

Separate prices total \$18.54.

SET INCLUDES: Sizes $\frac{7}{16}$, $\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$, $\frac{11}{16}$, $\frac{3}{4}$ -in. Plastic storage pouch included.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 4482—Shpg. wt. 1 lb. 12 oz.Set \$15.50

Individual Combination Wrenches

SIZES, ORDERING INFORMATION:

See construction features above, warranty on opposite page.

Catalog Number	Size	Length	Shpg. wt.	Each
9 GT 44699	$\frac{1}{4}$ in.	$3\frac{1}{16}$ in.	3 oz.	\$1.89
9 GT 44691	$\frac{5}{16}$ in.	$4\frac{1}{8}$ in.	3 oz.	1.99
9 GT 44692	$\frac{3}{8}$ in.	$4\frac{1}{2}$ in.	3 oz.	2.19
9 GT 44693	$\frac{7}{16}$ in.	$5\frac{1}{4}$ in.	3 oz.	2.49
9 GT 44694	$\frac{1}{2}$ in.	$5\frac{1}{2}$ in.	4 oz.	2.59
9 GT 44695	$\frac{9}{16}$ in.	$6\frac{1}{2}$ in.	5 oz.	2.79
9 GT 44696	$\frac{5}{8}$ in.	$7\frac{1}{2}$ in.	5 oz.	2.99
9 GT 44697	$\frac{11}{16}$ in.	8 in.	7 oz.	3.09
9 GT 44698	$\frac{3}{4}$ in.	$8\frac{1}{2}$ in.	7 oz.	3.39
9 GT 44701	$\frac{7}{8}$ in.	$9\frac{1}{2}$ in.	9 oz.	3.69
9 GT 44702	$1\frac{1}{16}$ in.	$10\frac{1}{2}$ in.	10 oz.	4.09
9 GT 44703	$\frac{3}{4}$ in.	$11\frac{1}{2}$ in.	11 oz.	4.59
9 GT 44704	$1\frac{1}{8}$ in.	$12\frac{1}{2}$ in.	14 oz.	4.79
9 GT 44705	1 in.	$13\frac{1}{2}$ in.	1 lb.	5.49
9 GT 44706	$1\frac{1}{16}$ in.	$14\frac{1}{2}$ in.	1 lb. 5 oz.	7.19
9 GT 44707	$1\frac{1}{8}$ in.	$15\frac{1}{2}$ in.	1 lb. 7 oz.	9.19
9 GT 44708	$1\frac{1}{4}$ in.	$16\frac{1}{2}$ in.	1 lb. 12 oz.	10.29
9 GT 44709	$1\frac{3}{8}$ in.	$18\frac{1}{2}$ in.	1 lb. 15 oz.	12.29

METRIC Combination Wrench Sets

16-piece Set. Separate prices total \$61.54.

SET INCLUDES: Sizes 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 and 27mm.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 42907—Shpg. wt. 7 lbs. 15 oz.Set \$47.99

14-piece Set

SET INCLUDES: Sizes 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24mm. Plastic pouch included.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 42908—Shpg. wt. 4 lbs. 7 oz.Set \$42.99

10-piece Set

SET INCLUDES: Sizes 6, 8, 9, 10, 12, 13, 14, 15, 17, 19mm. Plastic storage pouch included.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 4291—Shpg. wt. 2 lbs. 4 oz.Set \$28.99

6-piece Set

SET INCLUDES: Sizes 8, 9, 10, 12, 13, 14mm. Plastic storage pouch included.

ORDERING INFORMATION: See construction features above, warranty on opposite page.

9 GT 4292—Shpg. wt. 1 lb. 3 oz.Set \$15.50

Individual Combination Wrenches

SIZES, ORDER INFO: See construction features above, warranty on opposite page.

Catalog Number	Size	Length	Shpg. wt.	Each
9 GT 42909	6mm	$3\frac{1}{8}$ in.	3 oz.	\$2.39
9 GT 42911	7mm	$3\frac{3}{8}$ in.	3 oz.	2.49
9 GT 42912	8mm	$4\frac{1}{8}$ in.	3 oz.	2.49
9 GT 42913	9mm	$4\frac{3}{8}$ in.	3 oz.	2.49
9 GT 42914	10mm	$4\frac{3}{4}$ in.	3 oz.	2.59
9 GT 42915	11mm	$5\frac{1}{8}$ in.	4 oz.	2.59
9 GT 42916	12mm	$5\frac{7}{8}$ in.	4 oz.	2.79
9 GT 42917	13mm	$6\frac{1}{8}$ in.	5 oz.	2.89
9 GT 42918	14mm	$6\frac{3}{4}$ in.	5 oz.	2.89
9 GT 42919	15mm	$7\frac{1}{8}$ in.	7 oz.	3.19
9 GT 42924	16mm	8 in.	7 oz.	3.29
9 GT 42929	17mm	$8\frac{1}{2}$ in.	7 oz.	3.49
9 GT 42925	18mm	$8\frac{3}{4}$ in.	8 oz.	3.69
9 GT 42921	19mm	$9\frac{1}{2}$ in.	9 oz.	3.89
9 GT 42937	20mm	$10\frac{1}{4}$ in.	11 oz.	4.19
9 GT 42938	21mm	$10\frac{7}{8}$ in.	11 oz.	4.39
9 GT 42922	22mm	$11\frac{1}{8}$ in.	11 oz.	4.59
9 GT 42939	23mm	$12\frac{1}{8}$ in.	15 oz.	4.89
9 GT 42923	24mm	$12\frac{3}{4}$ in.	14 oz.	5.19
9 GT 42931	25mm	$13\frac{1}{2}$ in.	1 lb. 2 oz.	5.49
9 GT 42932	26mm	$14\frac{1}{8}$ in.	1 lb. 4 oz.	6.29
9 GT 42933	27mm	$14\frac{3}{8}$ in.	1 lb. 7 oz.	6.99
9 GT 42934	28mm	$15\frac{1}{8}$ in.	1 lb. 10 oz.	8.49
9 GT 42935	30mm	$16\frac{1}{4}$ in.	1 lb. 11 oz.	9.79
9 GT 42936	32mm	$16\frac{3}{4}$ in.	1 lb. 13 oz.	10.19

CRAFTSMAN® STANDARD Combination Open-end Socket-type Wrenches

6-piece Set \$31.99

(4) 6-piece STANDARD Set

Separate prices total \$33.74.

Use open end in areas where you can get plenty of swing, or 12-point swivel socket end in constricted areas.

CONSTRUCTION: Alloy steel. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome-plated to resist rust.

SET INCLUDES: 6 open-end, socket-type wrenches ($\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$ and $\frac{3}{4}$ -in.). $7\frac{1}{16}$ to $10\frac{1}{16}$ in. long. Plastic pouch.

ORDERING INFORMATION: See warranty on opposite page.

Shpg. wt. 2 lbs. 3 oz.

9 GT 4255—Set \$31.99

Individual Wrenches

SIZES, ORDERING INFORMATION:

Catalog Number	Size (in.)	Length (inches)	Shpg. wt.	Each
9 GT 42544	$\frac{3}{8}$	$7\frac{1}{16}$	5 oz.	\$3.99
9 GT 42541	$\frac{7}{16}$	$7\frac{11}{16}$	5 oz.	4.59
9 GT 42542	$\frac{1}{2}$	$8\frac{5}{16}$	7 oz.	5.39
9 GT 42543	$\frac{9}{16}$	$8\frac{13}{16}$	7 oz.	5.69
9 GT 42545	$\frac{5}{8}$	$9\frac{7}{16}$	9 oz.	6.29
9 GT 42547	$\frac{11}{16}$	$9\frac{29}{32}$	10 oz.	6.99
9 GT 42546	$\frac{3}{4}$	$10\frac{3}{16}$	11 oz.	7.79

CRAFTSMAN® Ratcheting Box-end Wrenches in STANDARD or METRIC sizes

(5) 5-piece STANDARD or METRIC Set

5-piece Set \$18.50

CONSTR: Chrome-plated steel. Lexan® polycarbonate shroud seals mechanism from dirt. 12-point openings. Turn wrench over to reverse ratcheting direction.

5-piece STANDARD Set

Separate prices total \$19.35.

SET COMP: Five ratcheting box-end wrenches ($\frac{1}{4}$ x $\frac{5}{16}$, $\frac{3}{8}$ x $\frac{7}{16}$, $\frac{1}{2}$ x $\frac{9}{16}$, $\frac{5}{8}$ x $\frac{11}{16}$, $\frac{3}{4}$ x $\frac{13}{16}$ -inch); pouch.

ORD INFO: Warranty, opposite pg.

9 GT 4368—Wt. 2 lbs. 10 oz.Set \$18.50

Individual STANDARD Wrenches

SIZES, ORDERING INFORMATION:

Catalog Number	Size (in.)	Length (in.)	Wt. oz.	Each
9 GT 43681	$\frac{1}{4}$ x $\frac{5}{16}$	$4\frac{1}{4}$	5	\$2.89
9 GT 43682	$\frac{3}{8}$ x $\frac{7}{16}$	$6\frac{1}{8}$	8	3.29
9 GT 43683	$\frac{1}{2}$ x $\frac{9}{16}$	$7\frac{1}{2}$	9	3.99
9 GT 43684	$\frac{5}{8}$ x $\frac{11}{16}$	$8\frac{1}{2}$	11	4.29
9 GT 43685	$\frac{3}{4}$ x $\frac{13}{16}$	10	15	4.89

5-piece METRIC Set

Separate prices total \$19.35.

SET COMP: Five ratcheting box-end wrenches (6x8, 10x11, 12x13, 14x16 and 17x19mm); pouch.


ORD INFO: Warranty, opposite pg.

9 GT 4369—Wt. 2 lbs. 10 oz.Set \$18.50

Individual METRIC Wrenches

SIZES, ORDERING INFORMATION:

Catalog Number	Size (mm)	Length (in.)	Wt. oz.	Each
9 GT 43691	6x8	$4\frac{1}{4}$	5	\$2.89
9 GT 43692	10x11	$6\frac{1}{8}$	7	3.29
9 GT 43693	12x13	$7\frac{1}{2}$	9	3.99
9 GT 43694	14x16	$8\frac{1}{2}$	11	4.29
9 GT 43695	17x19	10	15	4.89

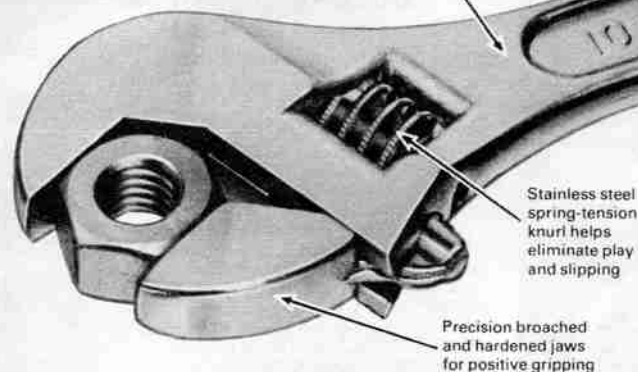

Forged, high-carbon boron steel construction for strength

Stainless steel spring-tension knurl helps eliminate play and slipping

Precision broached and hardened jaws for positive gripping

CONSTRUCTION: Body constructed of forged high-carbon boron steel, heat-treated for strength and durability. Jaws precision broached and hardened. Nickel-chrome plated to resist rust and corrosion. Stainless steel spring-tension knurl helps eliminate "play" to prevent slipping. Thin head for tight spots and close work. Jaw does not protrude at top when closed. Exceeds Fed. Specs. GGG-W-631b for torque strength.

Low as **\$5.27** 4-inch length

Nickel-chrome plating for rust and corrosion resistance


SIZES, ORDERING INFORMATION: See warranty on opposite page.

Catalog No.	Size	Capacity	Shpg. wt.	Each
9 GT 44601	4 in.	1/2 in.	4 oz.	\$5.27
9 GT 44602	6 in.	3/4 in.	7 oz.	5.67
9 GT 44603	8 in.	1 in.	11 oz.	6.67
9 GT 44604	10 in.	1 1/8 in.	1 lb. 2 oz.	7.77
9 GT 44605	12 in.	1 3/8 in.	1 lb. 13 oz.	10.97
9 GT 44606	16 in.	1 7/8 in.	4 lbs. 3 oz.	17.97

3-pc. Set, 6, 8, 10-in. sizes sold above. Pouch.
9 GT 44607—Wt. 2 lbs. 1 oz. ...Set \$17.97



CRAFTSMAN® Ignition Wrench Sets

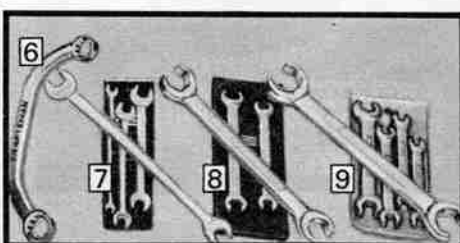

CRAFTSMAN® Manifold, Tappet and Flare-nut Wrenches

CONSTRUCTION: Balance designed and precision broached. Made from drop-forged, chrome-plated steel for durability and rust resistance.

(6) Starter and Manifold Wrench

Specially designed to allow you to work in hard-to-reach engine areas. Measures 1/8x3/8x7 1/4 inches long with 12-point openings.

ORDERING INFORMATION:
See warranty on opposite page.
9 GT 4376—Shipping weight 7 ounces\$4.59

(7) 4-piece Tappet Wrench Set

Use to adjust tappets ... help eliminate engine noise. Includes one each of sizes 3/8x7/16, 1/2x9/16, 5/8x1 1/16, 3/4x3/8-inch. Exceed Federal Specifications GGG-W-636. Plastic storage pouch included.

ORDERING INFORMATION:
See warranty on opposite page.
9 GT 44452—Shpg. wt. 1 lb. 4 oz.Set \$14.69

Individual Tappet Wrenches

Catalog Number	Size	Shpg. wt.	Price
9 GT 44475	3/8x7/16-inch	5 ounces	\$3.49
9 GT 44471	1/2x9/16-inch	5 ounces	3.79
9 GT 44472	5/8x1 1/16-inch	6 ounces	3.89
9 GT 44473	3/4x3/8-inch	7 ounces	3.99
9 GT 44474	3/8x7/16-inch	8 ounces	4.39

(8) 3-piece Flare-nut Wrench Set

6-point openings. Includes one each of sizes 3/8x7/16, 1/2x9/16, 5/8x1 1/16-in. Plastic pouch.

ORDERING INFORMATION:
See warranty on opposite page.
9 GT 4433—Shpg. wt. 14 oz.Set \$12.69

Standard Flare-nut Wrenches

Catalog Number	Size	Length	Shpg. wt.	Price
9 GT 44174	3/8x7/16-inch	6 inches	4 ounces	\$4.29
9 GT 44171	1/2x9/16-inch	6 1/2 inches	5 ounces	4.69
9 GT 44173	5/8x1 1/16-inch	8 1/2 inches	8 ounces	4.99

(9) 5-piece Metric Flare-nut Wrench Set

6-point openings. Includes one each of sizes 9x11, 10x12, 13x14, 15x17, 19x21mm. Plastic pouch.

ORDERING INFORMATION:
See warranty on opposite page.
9 GT 4434—Shpg. wt. 1 lb. 7 oz.Set \$18.50

Metric Flare-nut Wrenches

Catalog Number	Size	Length	Shpg. wt.	Price
9 GT 44175	9x11mm	6 inches	4 ounces	\$4.29
9 GT 44176	10x12mm	6 1/2 inches	5 ounces	4.39
9 GT 44177	13x14mm	7 inches	5 ounces	4.69
9 GT 44178	15x17mm	7 1/2 inches	8 ounces	4.99
9 GT 44179	19x21mm	8 inches	9 ounces	5.39

Adjustable Wrenches



10 6-inch Adjustable Wrench **\$4.17**

(10) Adjustable Wrenches

CONSTRUCTION: Drop-forged alloy steel. Chrome-plated. Polished face. Satin-finished handle. Milled jaws for firm grip. Imported.

SIZES, ORDERING INFO: Not Craftsman.

Catalog No.	Length	Opens	Shipping weight	Each
9 GT 30874	6	3/4 in.	6 ounces	\$4.17
9 GT 30871	8	7/8 in.	10 ounces	4.67
9 GT 30872	10	1 1/8 in.	15 ounces	5.67
9 GT 30873	12	1 3/8 in.	1 pound 9 ounces	7.97
9 GT 30877	15	1 7/8 in.	3 pounds 6 ounces	12.97

3-piece Set, 6, 8, 10-in. sizes sold above. Pouch.

ORDERING INFORMATION: Not Craftsman.
9 GT 30878—Shpg. wt. 1 lb. 14 oz.Set \$13.47

CRAFTSMAN® Nut Drivers



Variable size **\$5.99**

Variable-size Driver grips tighter the harder you turn

7-piece Set **\$16.50**

(11) CRAFTSMAN Variable-size Nut Driver

CONSTRUCTION: Fluted plastic handle. Rounded end for pressure turning. Positive locking device.

USES: Holds hex nuts and bolts for easy starting and removal when working in tight places.

RANGE: Fits hex nuts—1/4 thru 7/16-inch. Hex-head bolts—No. 6 thru 1/4-inch diameter.

ORDERING INFO: See warranty on opposite page.
9 GT 4199—Shipping weight 12 ounces\$5.99

(12) 7-piece CRAFTSMAN Nut Driver Set ... choose standard or metric sizes


CONSTRUCTION: Hardened sockets. Plastic handles. All nut drivers in set fit hex nuts. Set includes one each of 7 sizes listed below in either standard or metric sizes. Plastic storage pouch included.

ORDERING INFO: See warranty on opposite page.
9 GT 4196—Standard. Wt. 1 lb. 8 oz.Set \$16.50
9 GT 4197—Metric. Wt. 1 lb. 8 oz.Set 16.50

Individual Nut Drivers

SIZES, ORDERING INFORMATION:

Standard Nut Drivers					Metric Nut Drivers				
Catalog Number	Size In.	Nut size	Wt. oz.	Price Each	Catalog Number	Size Mm.	Wt. oz.	Price Each	
9GT41977	3/16	2-3	4	\$2.49	9GT41981	5	5	\$2.49	
9GT41971	1/4	4	5	2.49	9GT41982	6	5	2.49	
9GT41972	5/16	5-6	5	2.49	9GT41983	7	5	2.49	
9GT41973	3/8	8	5	2.49	9GT41984	8	5	2.49	
9GT41974	7/16	10	5	2.49	9GT41985	9	5	2.49	
9GT41975	1/2	12-1/4	6	2.49	9GT41986	10	6	2.49	
9GT41976	5/8	16	6	2.49	9GT41987	11	6	2.49	



(4) Ignition File

CONSTRUCTION: Kromedge® steel for durability. Double cut. 5 inches long.

ORDERING INFORMATION:
See warranty on opposite page.
Shipping weight 3 ounces.
9 GT 311949c

(5) 14-pc. Ignition Set ... choose standard or metric sizes

CONSTRUCTION: Nickel-plated steel. SET COMP: 8 combination midjet wrenches; pliers; screwdriver; 6-leaf thickness gauge; file; 2 punches; pouch.

ORDER INFO: Not Craftsman.


Standard.
Includes wrenches 1 3/4 to 1 1/8-in.

9 GT 44671—Wt. 10 oz.Set \$4.59

Metric: Includes wrenches 4x4.5 to 10x11mm.
9 GT 44674—Wt. 10 oz.Set \$4.59

CRAFTSMAN® Ratchet Wrenches and Accessories

All backed by our Full Unlimited Warranty below

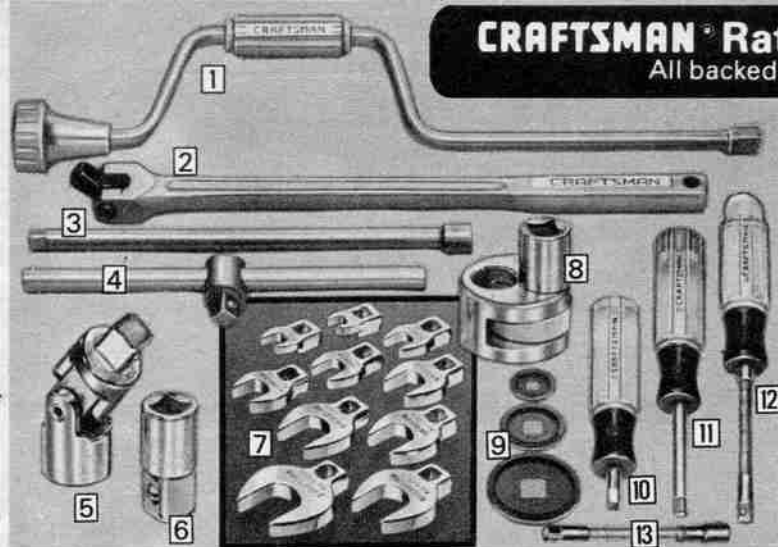

(1 thru 13) CRAFTSMAN® Ratchet Wrench Accessories

(1 thru 8) CONSTRUCTION: Alloy steel. Heat-treated, then oil-quenched and tempered. Nickel-chrome plating adds rust and corrosion resistance.

(1) Speeder Wrenches

SIZES, ORDERING INFORMATION: See warranty below.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 4281	1/4-in.	15 1/2 in.	10 oz.	\$4.99
9 GT 4427	3/8-in.	16 in.	1 lb. 4 oz.	5.99
9 GT 4416	1/2-in.	18 in.	2 lbs. 1 oz.	7.29

*No center grip

†With rotating center grip

(2) Flex Handles. Hinged-joint. Positive stops at 0° and 45°.

SIZES, ORDERING INFORMATION: See warranty below.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 43523	1/4-in.	6 in.	5 oz.	\$3.69
9 GT 44363	3/8-in.	10 in.	14 oz.	6.79
9 GT 44201	1/2-in.	15 in.	1 lb. 10 oz.	9.49
9 GT 44202	1/2-in.	18 in.	1 lb. 15 oz.	11.49
9 GT 4431	1/2-in.	18 in.	3 lbs.	17.99

(3) Extension Bars

Lock on to ratchet. Permit use of ratchet when there's only room for the socket. Added length eases work in tight places. SIZES, ORDERING INFORMATION: See warranty below. See page 122 for 1-inch square drive extension bars.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 43538	1/4-in.	1 1/2 in.	3 oz.	\$1.99
9 GT 43539	1/4-in.	3 in.	3 oz.	2.29
9 GT 43531	1/4-in.	6 in.	4 oz.	2.59
9 GT 43532	1/4-in.	14 in.	7 oz.	4.59
9 GT 43537	3/8-in.	1 1/2 in.	4 oz.	2.19
9 GT 44264	3/8-in.	3 in.	4 oz.	2.69
9 GT 44261	3/8-in.	6 in.	6 oz.	3.19
9 GT 44262	3/8-in.	10 in.	9 oz.	3.89
9 GT 44263	3/8-in.	20 in.	1 lb.	6.39
9 GT 43522	1/2-in.	2 in.	6 oz.	2.59
9 GT 44133	1/2-in.	3 in.	6 oz.	3.19
9 GT 44131	1/2-in.	6 in.	9 oz.	3.69
9 GT 44132	1/2-in.	10 in.	1 lb. 1 oz.	4.79
9 GT 44134	1/2-in.	20 in.	1 lb. 7 oz.	6.99
9 GT 4440	1/4-in.	5 in.	1 lb. 1 oz.	6.99
9 GT 4441	3/4-in.	8 in.	1 lb. 8 oz.	8.99
9 GT 4442	1/4-in.	16 in.	2 lbs. 12 oz.	11.29

(4) Slide-bar Handle. Use as "T" or "L" handle to loosen connections.

SIZES, ORDER INFO: Warranty below.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 4354	1/4-in.	4 1/2 in.	4 oz.	\$3.49
9 GT 4428	3/8-in.	7 in.	10 oz.	4.39
9 GT 44152	1/2-in.	9 in.	1 lb.	4.79
9 GT 44151	1/2-in.	15 in.	1 lb. 6 oz.	7.39
9 GT 4443	3/4-in.	18 in.	4 lbs.	10.49

(5) Universal Joints

Swing 90°. For tight places.

SIZES, ORDER INFO: Warranty below.

Catalog No.	Size	Shpg. wt.	Each
9 GT 4280	1/4-in.	3 oz.	\$4.79
9 GT 4435	3/8-in.	4 oz.	5.19
9 GT 4425	1/2-in.	7 oz.	5.19

(6) Socket Adapters

Change square drive size to another.

SIZES, ORDERING INFORMATION: See warranty below.

Catalog Number	Drive size	Con-verts to	Wt. oz.	Each
9 GT 4256	3/8-in.	1/4-in.	3	\$2.29
9 GT 4257	1/4-in.	3/8-in.	3	2.19
9 GT 4258	3/8-in.	1/2-in.	4	2.49
9 GT 4259	1/2-in.	3/4-in.	4	2.69
9 GT 4271	1/2-in.	3/4-in.	6	3.69

(7) 10-piece Crowfoot Wrench Set

Use with 3/8-inch square drive.

SIZES: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 1-inch. Plastic pouch.

ORDERING INFO: See warranty below.

Shipping weight 1 lb. 6 oz.

9 GT 4362.....Set \$24.99

Individual Crowfoot Wrenches. Use with 3/8-inch square drive.

SIZES, ORDERING INFORMATION: See warranty below, left.

9 GT 43611	3/8-in.	Wt. 3 oz.	\$2.79
9 GT 43621	7/16-in.	Wt. 3 oz.	2.89
9 GT 43622	1/2-in.	Wt. 3 oz.	3.09
9 GT 43623	9/16-in.	Wt. 3 oz.	3.19
9 GT 43624	5/8-in.	Wt. 4 oz.	3.39
9 GT 43625	11/16-in.	Wt. 4 oz.	3.49
9 GT 43626	3/4-in.	Wt. 4 oz.	3.59
9 GT 43627	13/16-in.	Wt. 4 oz.	3.89
9 GT 43628	7/8-in.	Wt. 5 oz.	4.09
9 GT 43629	1-in.	Wt. 6 oz.	4.29

(8) Stud Remover. Capacity of 5/16 to 3/4-inch. 1/2-inch square drive.

ORDERING INFO: See warranty below.

Shipping weight 14 ounces.

9 GT 4457.....\$9.69

(9) Ratchet Speeder Adapters

Steel with rust-resistant finish. Fit between ratchet and socket. Set of three for 1/4, 3/8 and 1/2-inch square drive ratchets. With plastic pouch.

ORDERING INFO: See warranty below.

9 GT 44191—Wt. 4 oz.Set \$2.99

(10) Handle Extension

1/4-inch square drive. 4 1/2 inches long. Plastic handle.

ORDERING INFO: See warranty below.

9 GT 43351—Wt. 5 oz.\$2.69

(11) Socket Extension

For 1/4-inch square drive. 1/4-inch female socket in top of plastic handle, 6 in. long.

ORDERING INFO: See warranty below.

9 GT 43371—Wt. 6 oz.\$3.19

(12) 6-inch Flex Spinner

For 1/4-in. square drive sockets and fittings. Flexible steel cable. Plastic handle.

ORDERING INFO: See warranty below.

9 GT 4355—Wt. 5 oz.\$4.49

(13) Flex Extension. Flexible cable. 1/4-inch square drive. 4 inches long.

ORDERING INFO: See warranty below.

9 GT 4336—Wt. 3 oz.\$3.19



Fine-tooth Ratchet has double-pawl design which effectively doubles ratcheting tooth action... great for fast work in tight places

Low as \$9.49

1/4-inch square drive

Here's what makes these CRAFTSMAN Ratchet Wrenches so outstanding:

- Operated over 1/2 million times in actual lab tightening tests... without serious wear.
- Made from alloy steel—specially chosen for its overall strength, resistance to brittleness.
- Drop-forged to increase strength at points of stress.
- Nickel-chrome plated to resist rust.
- Quick-release button feature for easy socket removal.
- Reversing lever for changing ratchet direction quickly.

(14 thru 16) Quick-release Reversible Ratchets

CONSTRUCTION: Drop-forged alloy steel. Nickel-chrome plating adds rust and corrosion resistance.

(14) Fine-tooth Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Quick-release button releases sockets instantly without hard pulling or prying. Double-pawl design effectively doubles ratcheting tooth action. Built-in knurled speeder simplifies rapid spin down of nuts and bolts. SIZES, ORDERING INFORMATION:

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 43178	1/4-in.	5 1/4	35	6	\$9.49
9 GT 43788	3/8-in.	6 3/4	41	11	12.99
9 GT 44978	1/2-in.	10 3/4	45	1	15.99

(15) Flex-head Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Adjusts from 0° to 90° for easier operation. Quick-release button releases sockets instantly without hard pulling or prying. Reversing lever for hard to get at work areas. (Wrenches 9-42792 and 9-44973 have fine-tooth, double-pawl design).

SIZES, ORDERING INFORMATION:

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 42791	3/8-in.	11 1/4	24	1	\$12.99
9 GT 42792	3/8-in.	11	41	1	12.99
9 GT 44974	1/2-in.	16 3/4	32	2	17.99
9 GT 44973	1/2-in.	17	45	2	19.99

(16) Regular-head Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Quick-release button releases tight or greasy sockets without hard pulling or prying. Reversing lever changes ratchet direction.

SIZES, ORDERING INFORMATION:

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 43175	1/4-in.	5 1/4	24	6	\$7.49
9 GT 43785	3/8-in.	6 3/4	24	11	9.99
9 GT 44975	1/2-in.	10 3/4	32	1	12.99
9 GT 44976	1/2-in.	15	32	1	13.99
9 GT 44801	3/4-in.	19 3/4	24	5	36.99

Flex-head Ratchet adjusts from 0° to 90° for easier operation

Low as

\$12.99

3/8-in. sq. drive. 24 teeth


Regular-head Ratchet

Low as

\$7.49

1/4-inch square drive

Full Unlimited Warranty on CRAFTSMAN® Hand Tools. If any Craftsman Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



**CRAFTSMAN
STANDARD and METRIC
Hex Key Wrench Sets**
Steel; rust-resistant finish.
Chamfered ends. Size stamped
into shank. Pouch with sets list-
ed under (1).

**(1) 20-piece
Short/Long-arm Sets**

Standard Set
SHORT-ARM SIZES: .050, 1/16,
3/64, 1/32, 1/64, 1/8, 3/32, 1/16,
1/32, 1/4-in.
LONG-ARM SIZES: 3/64, 1/32, 1/64,
1/8, 3/32, 1/16, 1/32, 1/4-in.
ORDER INFO: Warranty, above.
9 GT 46696—Wt. 12 oz. \$4.89

Metric Set
SHORT-ARM SIZES: 1.5, 2, 2.5,
3, 4, 4.5, 5, 5.5, 6, 7, 8mm.
LONG-ARM SIZES: 1.5, 2, 2.5, 3,
4, 4.5, 5, 5.5, 6mm.
ORDER INFO: Warranty, above.
9 GT 46687—Wt. 11 oz. \$4.89

**14-piece
Short/Long-arm Sets**

Standard Set
SHORT-ARM SIZES: .050, 1/16,
3/64, 1/32, 1/64, 1/8-in.
LONG-ARM SIZES: 3/64, 1/8, 1/4,
5/32, 3/16, 1/2, 3/4, 1/2-in.
ORDER INFO: Warranty, above.
9 GT 46683—Wt. 11 oz. \$2.89

Metric Set
SHORT-ARM SIZES: 1.5, 2, 2.5,
3, 4, 4.5mm.
LONG-ARM SIZES: 1.5, 2, 2.5, 3,
4, 5, 6, 7mm.
ORDER INFO: Warranty, above.
9 GT 46684—Wt. 11 oz. \$2.89

11-piece Short-arm Sets

Standard Set
SIZES: .050, 1/16, 3/64, 1/32, 1/64, 1/8,
3/32, 1/16, 1/32, 1/4-in.
ORDER INFO: Warranty, above.
9 GT 46693—Wt. 6 oz. \$1.89

Metric Set
SIZES: 1.5, 2, 2.5, 3, 4, 4.5, 5, 5.5,
6, 7, 8mm.
ORDER INFO: Warranty, above.
9 GT 46679—Wt. 6 oz. \$1.89

6-piece Short-arm Sets

Standard Set
SIZES: .050, 1/16, 3/64, 1/32, 1/8, and
1/4-in.
ORDER INFO: Warranty, above.
9 GT 46685—Wt. 4 oz. \$1.97

Metric Set
SIZES: 1.5, 2, 2.5, 3, 4, 5mm.
ORDER INFO: Warranty, above.
9 GT 46686—Wt. 4 oz. \$1.97

**(2) 9-in-1 Hex Key
Wrench Sets**

SIZES: 9 sizes (3/64 thru 1/4-in.)
ORDER INFO: Not Craftsman.
9 GT 46282—Wt. 8 oz. \$2.69
SIZES: 9 sizes (.050 thru 1/16-in.)
ORDER INFO: Not Craftsman.
9 GT 46281—Wt. 6 oz. \$2.29

**(3) METRIC Drain Plug
Wrenches**

SIZES, ORDER INFO:
17mm Drain Plug Wrench
Shpg. wt. 1 lb. 1 oz.
9 GT 46666 \$3.99
12mm Drain Plug Wrench
9 GT 46667—Wt. 7 oz. \$3.49

CRAFTSMAN® Individual Sockets

Full Unlimited Warranty on CRAFTSMAN® Hand Tools.
If any CRAFTSMAN Hand Tool ever fails to give complete
satisfaction, return it to the nearest Sears store throughout
the U.S. and Sears will replace it, free of charge. This war-
ranty gives you specific legal rights, and you may also have
other rights which vary from state to state.

Choose 6, 8 or 12-point Sockets

6-point: For use on hex nuts and bolts.
Grip rounded corners.
8-point: For square nuts only. Ideal for use on
farm machinery and refrigeration equipment.
12-point: For use on standard hex nuts and cap screws.
More turning positions than 6 or 8-point sockets.



1/4-INCH SQUARE DRIVE



REGULAR DEPTH
Excellent for radio,
refrigeration and
electronic work

DEEP
Excellent for use
on nuts with over-
protruding bolts

10-piece STANDARD Socket Sets
... choose regular-depth or deep

SET COMPOSITION: Nine 6-pt. sock-
ets (3/16, 1/32, 1/4, 5/32, 3/16, 1/2, 3/8, 7/16,
1/2-in.); metal tray included.

DEPTH, ORD. INFO: See warranty
above and construction features on
opp. pg.

Regular-depth
9 GT 44453—Wt. 8 oz. Set \$9.49

Deep
Separate prices total \$17.91.

9 GT 44454—Wt. 14 oz. Set \$14.69

Individual STANDARD Sockets

ORDERING INFORMATION:
See Warranty above and construction
features on opposite page.

STANDARD, Regular-depth

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 43481	1/4	5/32	6	2.02	\$1.07
9 GT 43491	1/4	3/16	6	2.02	1.07
9 GT 43492	1/4	1/32	6	2.02	1.07
9 GT 43493	1/4	1/4	6	2.02	1.07
9 GT 43494	1/4	5/32	6	2.02	1.07
9 GT 43495	1/4	3/16	6	2.02	1.07
9 GT 43496	1/4	11/32	6	2.02	1.07
9 GT 43497	1/4	3/8	6	3.02	1.07
9 GT 43498	1/4	1/2	6	3.02	1.07
9 GT 43499	1/4	1/2	6	3.02	1.07
9 GT 43608	1/4	3/16	12	2.02	1.07
9 GT 43609	1/4	3/32	12	2.02	1.07
9 GT 43601	1/4	1/4	12	2.02	1.07
9 GT 43602	1/4	5/32	12	2.02	1.07
9 GT 43603	1/4	3/16	12	2.02	1.07
9 GT 43604	1/4	11/32	12	2.02	1.07
9 GT 43605	1/4	3/8	12	3.02	1.07
9 GT 43606	1/4	1/2	12	3.02	1.07
9 GT 43607	1/4	1/2	12	3.02	1.07

STANDARD, Deep

Catalog No.	Drive	Inches	Pts.	Wt.	Each
9 GT 43571	1/4	3/16	6	3.02	\$1.99
9 GT 43572	1/4	1/32	6	3.02	1.99
9 GT 43573	1/4	1/4	6	3.02	1.99
9 GT 43574	1/4	5/32	6	3.02	1.99
9 GT 43575	1/4	3/16	6	3.02	1.99
9 GT 43576	1/4	11/32	6	3.02	1.99
9 GT 43577	1/4	3/8	6	3.02	1.99
9 GT 43578	1/4	1/2	6	3.02	1.99
9 GT 43589	1/4	1/2	6	4.02	1.99

10-piece METRIC Socket Sets
... choose regular-depth or deep

SET COMPOSITION: Nine 6-point
sockets (4, 5, 6, 7, 8, 9, 10, 11 and
12mm); metal tray included.

DEPTH, ORD. INFO: See warranty
above and construction features on
opp. pg.

Regular-depth
9 GT 44455—Wt. 8 oz. Set \$9.49

Deep
Separate prices total \$17.91.

9 GT 44437—Wt. 14 oz. Set \$14.69

Individual METRIC Sockets

United States manufacturers are be-
ginning to use more metric fasteners
in their products. You'll be prepared
to service and repair those products
with these metric sockets.

ORDERING INFORMATION:
See warranty above and construction
features on opposite page.

METRIC, Regular-depth

Catalog Number	Drive	Size	Points	Wt. oz.	Each
9 GT 43505	1/4	4mm	6	2	\$1.07
9 GT 43501	1/4	5mm	6	2	1.07
9 GT 43502	1/4	6mm	6	2	1.07
9 GT 43503	1/4	7mm	6	2	1.07
9 GT 43504	1/4	8mm	6	2	1.07
9 GT 43507	1/4	9mm	6	2	1.07
9 GT 43508	1/4	10mm	6	3	1.07
9 GT 43509	1/4	11mm	6	3	1.07
9 GT 43513	1/4	12mm	6	3	1.07
9 GT 43514	1/4	13mm	6	3	1.07

METRIC, Deep

Catalog Number	Drive	Size	Points	Wt. oz.	Each
9 GT 44401	1/4	4mm	6	3	\$1.99
9 GT 44402	1/4	5mm	6	3	1.99
9 GT 44403	1/4	6mm	6	3	1.99
9 GT 44404	1/4	7mm	6	3	1.99
9 GT 44405	1/4	8mm	6	3	1.99
9 GT 44408	1/4	9mm	6	3	1.99
9 GT 44407	1/4	10mm	6	3	1.99
9 GT 44408	1/4	11mm	6	3	1.99
9 GT 44409	1/4	12mm	6	4	1.99
9 GT 44411	1/4	13mm	6	5	1.99
9 GT 44412	1/4	14mm	6	4	1.99

(4) Phillips-type Bits

SIZES, ORDER INFO: 1/4-in. sq.
drive, 1 1/2-in. long. Wt. 3 oz.
9 GT 42681—No. 1 \$2.89
9 GT 42682—No. 2 2.89

**(5) Slotted Screw-
driver Bits**

SIZES, ORDER INFO: 1/4-in. sq.
drive, 1 1/2-in. long. Wt. 3 oz.
9 GT 42691—.030x1/4-in. \$2.89
9 GT 42692—.039x1/4-in. 2.89

**(6) Hex Setscrew Bits
for socket wrenches**

SIZES, ORDER INFO: 1/4-in. sq.
drive, 1 1/2-in. long. Wt. 3 oz.
9 GT 42701—3/16-in. \$2.49
9 GT 42702—7/32-in. 2.49
9 GT 42703—1/4-in. 2.49
3/16-inch. Shpg. wt. 4 oz.
9 GT 42704 \$2.49
3/8-inch. Shpg. wt. 4 oz.
9 GT 42705 \$2.49



and Sets in **STANDARD** or **METRIC** Sizes

See 1/2, 3/4 and 1-inch square drive on next page

CRAFTSMAN® Sockets are not only tough... they help make your job easier, too.

- A** All metric-size sockets (except flexible) have this knurled band... so you can easily distinguish them from standard-size sockets
- B** Chamfered ends allow sockets to slide over nuts easily
- Alloy steel for strength... heat-treated, then oil quenched and tempered for uniform hardness
- Nickel-chrome plating adds rust and corrosion resistance



CRAFTSMAN® Sockets Full Unlimited Warranty. If any CRAFTSMAN Socket ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



3/8-inch Square Drive Flexible Sockets

3/8-INCH SQUARE DRIVE



REGULAR DEPTH
Ideal for work on cars and lawn mowers... excellent for home use



DEEP
Ideal for spark plugs, spring "U"-bolts... reach nuts with over-protruding bolts

STANDARD, METRIC Sets

9-pc. STANDARD Regular-depth Sets with 6 or 12-pt. openings

SET COMPOSITION: Eight sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16-in.); metal tray included.

ORDERING INFO: See warranty and construction features above.

9-piece Set with 6-point openings. 9 GT 44456—Wt. 1 lb. Set \$13.69

9-piece Set, 12-point openings. 9 GT 4389—Wt. 1 lb. Set \$13.69

10-piece STANDARD Deep Set

SET COMPOSITION: Nine 6-pt. deep sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8-in.); metal tray included.

ORDERING INFO: See warranty and construction features above. Separate prices total \$23.21.

9 GT 43156—Wt. 2 lbs. 4 oz. Set \$18.49

9-piece METRIC Regular-depth Sets with 6 or 12-point openings

SET COMPOSITION: Eight sockets (sizes 9, 10, 12, 13, 14, 15, 17 and 19mm); metal tray included.

ORDERING INFO: See warranty and construction features above. Separate prices total \$14.52.

9-piece Set with 6-point openings. 9 GT 4342—Wt. 13 oz. Set \$13.69

9-piece Set, 12-point openings. 9 GT 4347—Wt. 13 oz. Set \$13.69

10-piece METRIC Deep Set

SET COMPOSITION: Nine 6-pt. deep sockets (sizes 9, 10, 11, 12, 13, 14, 15, 17 and 19mm); metal tray.

ORDERING INFO: See warranty and construction features above. Separate prices total \$23.21.

9 GT 44438—Wt. 1 lb. 13 oz. Set \$18.49

Individual STANDARD Sockets

ORDERING INFORMATION: See Craftsman Full Unlimited Warranty and construction features described above.

STANDARD, Regular-depth

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 43001	3/8	3/8	6	3 oz.	\$1.69
9 GT 43002	3/8	7/16	6	3 oz.	1.69
9 GT 43003	3/8	1/2	6	3 oz.	1.69
9 GT 43004	3/8	9/16	6	3 oz.	1.79
9 GT 43005	3/8	5/8	6	3 oz.	1.79
9 GT 43006	3/8	11/16	6	4 oz.	1.79
9 GT 43007	3/8	3/4	6	4 oz.	1.89
9 GT 43008	3/8	13/16	6	4 oz.	1.89
9 GT 44341	3/8	3/4	8	3 oz.	1.69
9 GT 44342	3/8	7/8	8	3 oz.	1.69
9 GT 44343	3/8	1	8	3 oz.	1.69
9 GT 44344	3/8	1 1/8	8	3 oz.	1.69
9 GT 44345	3/8	1 1/4	8	3 oz.	1.69
9 GT 44331	3/8	3/8	12	3 oz.	1.69
9 GT 44332	3/8	7/16	12	3 oz.	1.69
9 GT 44333	3/8	1/2	12	3 oz.	1.69
9 GT 44334	3/8	9/16	12	3 oz.	1.79
9 GT 44335	3/8	5/8	12	3 oz.	1.79
9 GT 44336	3/8	11/16	12	4 oz.	1.79
9 GT 44337	3/8	3/4	12	4 oz.	1.89
9 GT 44338	3/8	13/16	12	4 oz.	1.89

STANDARD, Deep

Catalog No.	Drive	Inches	Points	Wt.	Each
9 GT 43301	3/8	3/8	12	4 oz.	\$2.09
9 GT 43311	3/8	7/16	12	4 oz.	2.19
9 GT 43312	3/8	1/2	12	4 oz.	2.29
9 GT 43313	3/8	9/16	12	4 oz.	2.49
9 GT 43314	3/8	5/8	12	5 oz.	2.59
9 GT 43316	3/8	11/16	12	5 oz.	2.69
9 GT 43317	3/8	3/4	12	5 oz.	2.79
9 GT 43318	3/8	13/16	12	7 oz.	2.99
9 GT 43319	3/8	7/8	12	7 oz.	3.09
9 GT 43333	3/8	3/8	6	4 oz.	2.09
9 GT 43331	3/8	7/16	6	4 oz.	2.19
9 GT 43332	3/8	1/2	6	4 oz.	2.29
9 GT 43334	3/8	9/16	6	4 oz.	2.49
9 GT 43335	3/8	5/8	6	5 oz.	2.59
9 GT 43336	3/8	11/16	6	5 oz.	2.69
9 GT 43337	3/8	3/4	6	5 oz.	2.79
9 GT 43338	3/8	13/16	6	7 oz.	2.99
9 GT 43339	3/8	7/8	6	8 oz.	3.09

Individual METRIC Sockets

ORDERING INFO: See warranty and construction features above.

METRIC, Regular-depth

Catalog No.	Drive	Size	Pts.	Wt.	Each
9 GT 43541	3/8	9mm	6	3 oz.	\$1.69
9 GT 43542	3/8	10mm	6	3 oz.	1.69
9 GT 43543	3/8	11mm	6	3 oz.	1.79
9 GT 43544	3/8	12mm	6	3 oz.	1.79
9 GT 43545	3/8	13mm	6	3 oz.	1.79
9 GT 43546	3/8	14mm	6	3 oz.	1.89
9 GT 43547	3/8	15mm	6	3 oz.	1.89
9 GT 43548	3/8	17mm	6	4 oz.	1.89
9 GT 43549	3/8	19mm	6	4 oz.	1.89
9 GT 44301	3/8	9mm	12	3 oz.	1.69
9 GT 44302	3/8	10mm	12	3 oz.	1.69
9 GT 44303	3/8	11mm	12	3 oz.	1.79
9 GT 44304	3/8	12mm	12	3 oz.	1.79
9 GT 44305	3/8	13mm	12	3 oz.	1.79
9 GT 44306	3/8	14mm	12	3 oz.	1.89
9 GT 44307	3/8	15mm	12	3 oz.	1.89
9 GT 44308	3/8	16mm	12	3 oz.	1.89
9 GT 44309	3/8	17mm	12	4 oz.	1.89
9 GT 44310	3/8	18mm	12	4 oz.	1.89
9 GT 44311	3/8	19mm	12	4 oz.	1.89

METRIC, Deep

Catalog No.	Drive	Size	Pts.	Wt.	Each
9 GT 44425	3/8	9mm	6	4 oz.	\$2.09
9 GT 44426	3/8	10mm	6	4 oz.	2.19
9 GT 44427	3/8	11mm	6	4 oz.	2.29
9 GT 44428	3/8	12mm	6	4 oz.	2.49
9 GT 44429	3/8	13mm	6	5 oz.	2.59
9 GT 44430	3/8	14mm	6	5 oz.	2.59
9 GT 44431	3/8	15mm	6	5 oz.	2.79
9 GT 44432	3/8	16mm	6	5 oz.	2.89
9 GT 44433	3/8	17mm	6	5 oz.	3.09
9 GT 44434	3/8	18mm	6	5 oz.	3.09
9 GT 44435	3/8	19mm	6	6 oz.	3.09
9 GT 44413	3/8	9mm	12	4 oz.	2.09
9 GT 44414	3/8	10mm	12	4 oz.	2.19
9 GT 44415	3/8	11mm	12	4 oz.	2.39
9 GT 44416	3/8	12mm	12	4 oz.	2.49
9 GT 44417	3/8	13mm	12	6 oz.	2.59
9 GT 44418	3/8	14mm	12	6 oz.	2.59
9 GT 44419	3/8	15mm	12	5 oz.	2.79
9 GT 44420	3/8	16mm	12	5 oz.	2.79
9 GT 44421	3/8	17mm	12	5 oz.	2.99
9 GT 44422	3/8	18mm	12	5 oz.	3.09
9 GT 44423	3/8	19mm	12	6 oz.	3.09

(1) Phillips-type Bits

SIZES, ORDERING INFO:
2 3/4 in. long, 3/8-inch drive, Wt. 4 oz.
9 GT 44371—No. 2..... \$2.99
9 GT 44372—No. 3..... 2.99
9 GT 44373—No. 4..... 2.99

(2) Slotted Screwdriver bits

SIZES, ORDERING INFO:
1 1/8 in. long, 3/8-in. drive, Wt. 4 oz.
9 GT 42651—.030x1/4-in. \$2.99
9 GT 42652—.030x3/16-in. 2.99
9 GT 42653—.055x3/8-in. 2.99

(3) Hex Setscrew Bits

SIZES, ORDERING INFO:
1 1/8 inches long, 3/8-inch square drive, 3/32, 1/16, 3/32-in. (Shipping weight 3 ounces); 1/4, 5/16, 3/8-in. (Shipping weight 4 ounces).
9 GT 46669—.52-in. \$2.49
9 GT 46661—.56-in. 2.49
9 GT 46662—.58-in. 2.49
9 GT 46663—.64-in. 2.49
9 GT 46664—.68-in. 2.49
9 GT 46665—.72-in. 2.49



(4) 3/8-in. drive Spark Plug Sockets

SIZES, ORDERING INFO:
1 1/8-inch
Shipping weight 6 oz.
9 GT 43321..... \$2.99
3/8-inch
Shipping weight 5 oz.
9 GT 43322..... \$2.99
Extra Rubber Insert
For 1 1/8-inch sockets.
9 GT 44246—Wt. 3 oz. 19c

(5) 3/8-inch drive Flexible Spark Plug Sockets

SIZES, ORDERING INFO:
1 1/8-inch flexible, Wt. 7 oz.
9 GT 43323..... \$6.19
3/8-inch flexible, Wt. 6 oz.
9 GT 43322..... \$6.19
Extra Rubber Insert
For 3/8-inch sockets.
9 GT 44247—Wt. 3 oz. 19c





CRAFTSMAN® 1/2, 3/4-in. Drive Sockets in STANDARD or METRIC sizes

CONSTRUCTION: Alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plating adds rust and corrosion resistance. Chamfered ends allow socket to slide over nuts easily.

FULL UNLIMITED WARRANTY ON CRAFTSMAN SOCKETS, RATCHETS AND RATCHET ACCESSORIES: If any CRAFTSMAN Socket, Ratchet or Ratchet Accessory fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

1/2-inch square drive



Regular Depth



Deep...

Ideal for use on Spring "U" bolts, etc. Reach nuts with over-protruding bolts

14-piece STANDARD Sets

Regular depth with 6 or 12-pt. openings **\$28.99** Set

SET COMP: Thirteen 1/2-inch drive sockets (7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8 and 1 1/4 inches); metal tray.

ORDERING INFORMATION: See construction features and warranty above. *Separate prices total \$32.87 each set.*

6-point openings.
9 GT 44457—Wt. 3 lbs. 13 oz.Set \$28.99

12-pt. openings.
9 GT 43482—Wt. 3 lbs. 14 oz.Set 28.99

12-piece Deep STANDARD Set

12-pt. openings **\$31.99** set

SET COMP: Eleven 1/2-in. drive deep sockets with 12-pt. openings (1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8-in.); metal tray.

ORDERING INFORMATION: See construction features and warranty above.

Separate prices total \$36.89.
Shipping weight 5 pounds 2 ounces.

9 GT 44458Set \$31.99

9-piece METRIC Sets

Regular-depth with 6 or 12-pt. openings **\$15.59** set

SET COMP: Eight 1/2-in. drive sockets (9, 10, 12, 13, 14, 15, 17, 19-mm.); metal tray.

ORDERING INFORMATION: See construction features, warranty above.

6-point openings.
Separate prices total \$17.12.

9 GT 4343—Wt. 1 lb. 5 oz.Set \$15.59

12-point openings.
Separate prices total \$17.02.

9 GT 43484—Wt. 1 lb. 5 oz.Set \$15.59

METRIC, Regular-depth Sockets

ORDERING INFORMATION: See construction features and warranty above.

Catalog Number	Drive	mm	Pts.	Wt. oz.	Each
9 GT 44251	1/2	9	6	4	\$1.99
9 GT 44252	1/2	10	6	4	1.99
9 GT 44253	1/2	11	6	4	1.99
9 GT 44254	1/2	12	6	4	1.99
9 GT 44255	1/2	13	6	4	2.19
9 GT 44256	1/2	14	6	4	2.19
9 GT 44257	1/2	15	6	4	2.19
9 GT 44258	1/2	17	6	4	2.29
9 GT 44259	1/2	19	6	5	2.29
9 GT 44260	1/2	22	6	6	2.49
9 GT 44231	1/2	9	12	4	1.99
9 GT 44232	1/2	10	12	4	1.99
9 GT 44233	1/2	11	12	4	1.99
9 GT 44234	1/2	12	12	4	1.99
9 GT 44235	1/2	13	12	4	2.09
9 GT 44236	1/2	14	12	4	2.09
9 GT 44237	1/2	15	12	4	2.29
9 GT 44238	1/2	16	12	4	2.29
9 GT 44239	1/2	17	12	4	2.29
9 GT 44240	1/2	18	12	5	2.29
9 GT 44241	1/2	19	12	5	2.29
9 GT 44242	1/2	21	12	6	2.39
9 GT 44239	1/2	22	12	6	2.49
9 GT 44242	1/2	24	12	6	2.89
9 GT 44243	1/2	27	12	7	2.89
9 GT 44244	1/2	30	12	9	3.29
9 GT 44245	1/2	32	12	10	3.29
9 GT 44246	1/2	36	12	14	3.89

METRIC Deep Sockets

ORDERING INFO: See construction features and warranty above.

Catalog Number	Drive	mm	Pts.	Wt. oz.	Each
9 GT 44444	1/2	14	12	6	\$3.29
9 GT 44445	1/2	17	12	7	3.39
9 GT 44446	1/2	19	12	7	3.49
9 GT 44447	1/2	21	12	9	3.59
9 GT 44448	1/2	22	12	8	3.69
9 GT 44449	1/2	27	12	11	3.89

9-piece STANDARD Set

Regular depth with 12-point openings **\$38.99** set

SET COMP: Nine 3/4-in. sq. drive sockets with 12-point openings. (1 1/16, 1 1/8, 1 1/4, 1 1/2, 1 3/8, 1 7/8, 1 1/2, 1 5/8 in.).

ORDERING INFORMATION: See construction features and warranty above.

Shipping weight 5 pounds 6 ounces.
9 GT 4349Set \$38.99

STANDARD Sizes Regular-depth Sockets

Choose 6-point, 8-point or 12-point openings. 6-point sockets constructed for best strength; 8-point sockets are used for square nuts, refrigeration and farm equipment; 12-point sockets allow more turning positions than 6-point sockets.

ORDERING INFORMATION: See construction features and warranty described above.

Catalog Number	Drive	In.	Pts.	Wt. oz.	Each
9 GT 44054	1/2	7/16	6	4	\$1.89
9 GT 44055	1/2	1/2	6	4	1.89
9 GT 44056	1/2	9/16	6	4	1.89
9 GT 44057	1/2	5/8	6	4	2.09
9 GT 44058	1/2	11/16	6	4	2.09
9 GT 44059	1/2	3/4	6	5	2.39
9 GT 44063	1/2	13/16	6	5	2.49
9 GT 44064	1/2	7/8	6	6	2.59
9 GT 44065	1/2	15/16	6	6	2.79
9 GT 44066	1/2	1	6	7	2.89
9 GT 44067	1/2	1 1/16	6	8	3.19
9 GT 44068	1/2	1 1/8	6	8	3.29
9 GT 44069	1/2	1 1/4	6	10	3.39
9 GT 44221	1/2	7/16	8	4	2.19
9 GT 44222	1/2	1/2	8	4	2.19
9 GT 44223	1/2	9/16	8	4	2.39
9 GT 44224	1/2	5/8	8	5	2.39
9 GT 44225	1/2	11/16	8	5	2.49
9 GT 44226	1/2	3/4	8	6	2.59
9 GT 47501	1/2	7/16	12	4	1.89
9 GT 47502	1/2	1/2	12	4	1.89
9 GT 47503	1/2	9/16	12	4	1.89
9 GT 47504	1/2	5/8	12	4	1.99
9 GT 47505	1/2	11/16	12	4	2.09
9 GT 47506	1/2	3/4	12	4	2.09
9 GT 47507	1/2	13/16	12	4	2.09
9 GT 47508	1/2	7/8	12	5	2.39
9 GT 47509	1/2	15/16	12	5	2.39
9 GT 47510	1/2	1	12	5	2.49
9 GT 47511	1/2	1 1/16	12	6	2.59
9 GT 47512	1/2	1 1/8	12	6	2.79
9 GT 47513	1/2	1 1/4	12	7	2.89
9 GT 47514	1/2	1 1/2	12	8	3.19
9 GT 47515	1/2	1 3/8	12	8	3.29
9 GT 47516	1/2	1 7/8	12	10	3.39
9 GT 47517	1/2	1 1/2	12	10	3.39

STANDARD Sizes Deep Sockets

ORDER INFO: See construction features and warranty above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 47521	1/2	1/2	12	6 oz.	\$2.99
9 GT 47522	1/2	9/16	12	7 oz.	2.99
9 GT 47523	1/2	5/8	12	6 oz.	3.09
9 GT 47524	1/2	11/16	12	7 oz.	3.09
9 GT 47525	1/2	3/4	12	8 oz.	3.09
9 GT 47526	1/2	25/32	12	7 oz.	3.09
9 GT 47527	1/2	13/16	12	8 oz.	3.19
9 GT 47528	1/2	7/8	12	9 oz.	3.29
9 GT 47529	1/2	15/16	12	10 oz.	3.59
9 GT 47531	1/2	1	12	10 oz.	3.79
9 GT 47532	1/2	1 1/16	12	11 oz.	3.79
9 GT 47533	1/2	1 1/8	12	12 oz.	3.99

1/2-in. Square Drive Spark Plug Socket

Neoprene insert protects plugs. 13/16-in. with 6-pt. opening. Hex end for use with wrench.

ORDERING INFORMATION: See construction features and warranty above.

Shipping weight 6 oz.

9 GT 44241\$2.99

1/2-in. Square Drive Drag-link Sockets

Screwdriver-type bit for slotted nuts on steering gear, shocks.

ORDERING INFORMATION: See construction features and warranty above.

Catalog No.	Size	Shpg. wt.	Each
9 GT 44511	9/16-in.	4 oz.	\$2.59
9 GT 44512	3/4-in.	4 oz.	2.79
9 GT 44513	15/16-in.	5 oz.	2.99
9 GT 44514	1 1/16-in.	8 oz.	3.29

3/4-inch Square Drive



1-inch Square Drive



(1 thru 4) 1-in. Dr. Accessories. Postpaid from Barborton, Ohio. Allow time. No C.O.D. *Not Craftsman.*

- (1) 30-inch Ratchet. 9 GT 47947—Wt. 6 lbs.\$59.99
- (2) Slide Bar Handle. 9 GT 47989—Wt. 5 lbs.\$24.99
- (3) 17-inch Extension Bar. 9 GT 47987—Wt. 5 lbs.\$22.99
- (4) 8-inch Extension Bar. 9 GT 47986—Wt. 3 lbs.\$17.99
- (5) 5-pc. Magnetic Insert Set. 1/4, 3/8, 1/2, 5/8, 3/4-in. inserts; pouch. 9 GT 4404—Wt. 1 lb.Set \$2.49

(6) 1-inch Square Drive STANDARD Sockets

Nickel-chrome plated alloy steel. 12-point openings. *Not Craftsman.* Postpaid from Barborton, Ohio. Allow time for delivery. No C.O.D.'s.

Catalog No.	Size	Shpg. wt.	Each	Catalog No.	Size	Wt.	Each
9 GT 47901	1 1/16	9 oz.	\$10.99	9 GT 47973	2 1/4	3 lbs.	\$26.99
9 GT 47902	1 1/8	1 lb.	10.99	9 GT 47974	2 1/2	3 lbs.	28.99
9 GT 47903	1 1/4	2 lbs.	11.99	9 GT 47975	2 3/8	3 lbs.	31.99
9 GT 47904	1 1/2	2 lbs.	14.99	9 GT 47976	2 1/2	3 lbs.	34.99
9 GT 47905	1 3/4	2 lbs.	14.99	9 GT 47977	2 3/4	3 lbs.	35.99
9 GT 47906	1 7/8	2 lbs.	14.99	9 GT 47978	2 7/8	3 lbs.	39.99
9 GT 47907	2	2 lbs.	17.99	9 GT 47979	2 3/4	3 lbs.	42.99
9 GT 47908	2 1/16	3 lbs.	18.99	9 GT 47980	2 3/4	5 lbs.	46.99
9 GT 47909	2 1/8	3 lbs.	18.99	9 GT 47981	2 3/4	5 lbs.	52.99
9 GT 47910	2 1/4	3 lbs.	23.99	9 GT 47982	2 3/4	5 lbs.	52.99
9 GT 47911	2 1/2	3 lbs.	24.99	9 GT 47983	2 3/4	6 lbs.	58.99
				9 GT 47984	2 3/4	6 lbs.	58.99
				9 GT 47985	2 3/4	6 lbs.	62.99

CRAFTSMAN® Socket Wrench Sets in 1/4, 3/8 and 1/2-inch Square Drive

(1) 15-piece Set STANDARD Size

Separate prices \$16.99
total \$27.52

SET COMP: Nine 6-pt. sockets (3/16 thru 1/2-in.); quick-release, reversible ratchet; 6-in. socket extension; 3 extension bars (1 1/2, 3, 6-in.); Permanex plastic case.

ORD. INFO: See warranty on opposite page. Wt. 1 lb. 7 oz.
9 GT 44141 Set \$16.99

15-piece METRIC Set

Separate prices \$16.99
total \$26.68

SET COMP: Nine 6-pt. sockets (4, 5, 6, 7, 8, 9, 10, 11, 12mm); quick-release, reversible ratchet; 6-in. socket extension; 3 extension bars (1 1/2, 3, 6-in.); Permanex plastic case.

ORDER INFO: See warranty, opposite page. Wt. 1 lb. 6 oz.
9 GT 44143 Set \$16.99

(2) 25-piece Set STANDARD Size

Separate prices \$33.99
total \$49.38

SET COMP: Nine 6-point sockets and nine 6-point deep sockets (3/16 thru 1/2-in.); quick-release reversible ratchet; 6-in. socket ext.; 3 extension bars (1 1/2, 3, 6-in.); universal joint; Permanex plastic case.

ORDER INFO: See warranty, opp. page. Wt. 2 lbs. 10 oz.
9 GT 44142 Set \$33.99

(3) 48-piece Set STANDARD Size

Sep. prices \$58.99
total \$86.44

SET COMPOSITION: Ten 6-pt. sockets (5/32 thru 1/2-in.); nine 6-pt. deep sockets (3/16 thru 1/2-in.); fine-tooth, quick-release reversible ratchet; flex T-handle; slide bar; crossbar; 6-in. socket ext.; 4-in. flex ext.; handle; 3 ext. bars (3, 6, 14-in.); 3/64-in. hex key wrench; 5 hex wrench sockets (3/16 thru 3/4-in.); 2 Phillips screwdriver-bit sockets (Nos. 1, 2); 3 clutch-head bit sockets (3/32 thru 3/16-in.); 2 screwdriver-bit sockets (.030, .039); universal joint; 5-pc. magnetic insert set; metal case.

ORDER INFO: See warranty, opposite page. Wt. 5 lbs. 2 oz.
9 GT 44392 Set \$58.99

1/4-inch Square Drive Sets Ideal for precision ignition, refrigeration, electronic and airplane work



(4) 13-piece Set STANDARD Size

Separate prices \$22.99
total \$35.98

SET COMPOSITION: Seven 12-point sockets (3/8 thru 3/4-inch); 13/16-inch, 6-point spark plug socket; quick-release, reversible ratchet; universal joint; two extension bars (3, 6-in.); Permanex plastic case.

ORDERING INFO: See warranty on opposite page.

Shpg. wt. 2 lbs. 9 oz.
9 GT 33225 Set \$22.99

13-piece METRIC Set

Separate prices \$22.99
total \$36.18

SET COMPOSITION: Same as item (4) except seven 12-point sockets are 9 thru 15mm.

ORDERING INFO: See warranty on opposite page.

Shpg. wt. 2 lbs. 8 oz.
9 GT 44147 Set \$22.99

(5) 21-piece Set STANDARD Size

Separate prices \$34.99
total \$55.20

SET COMPOSITION: Seven 6-point deep sockets (3/8 thru 3/4-inch); seven 12-point sockets (3/8 thru 3/4-inch); 13/16-inch spark plug socket; quick-release, reversible ratchet; universal joint; 3 extension bars (1 1/2, 3, 6-in.); Permanex plastic case.

ORDERING INFO: See warranty on opposite page.

Shpg. wt. 4 lbs. 2 oz.
9 GT 33227 Set \$34.99

21-piece METRIC Set

Separate prices \$34.99
total \$55.30

SET COMPOSITION: Same as (5), but seven 6-point deep sockets and seven 12-point sockets are 9 thru 15mm.

ORDERING INFO: See warranty on opposite page.

Shpg. wt. 3 lbs. 13 oz.
9 GT 44149 Set \$34.99

3/8-inch Square Drive Sets Ideal for work on cars, outboard motors, lawn mowers. Excellent for home use



1/4 and 3/8-inch Square Drive



22-piece STANDARD or METRIC Set

Separate prices total \$45.85 Standard, \$46.35 Metric **\$28.99**

STANDARD Set

SET COMP: Permanex plastic case. 1/4-inch Sq. Dr.: Seven 6-point sockets (1/4 thru 1/2-in.); 6-in. extension. 3/8-inch Sq. Dr.: Seven 12-point sockets (3/8 thru 3/4-in.); 13/16-inch, 6-point spark plug socket; quick-release, reversible ratchet; socket adapter (3/8 to 1/4-in.); 3 ext. bars (1 1/2, 3, 6-in.).

ORDERING INFO: See warranty on opposite page. Wt. 3 lbs. 3 oz.
9 GT 33236 Set \$28.99

METRIC Set

SET COMP: Permanex plastic case. 1/4-in. Sq. Dr.: Seven 6-pt. sockets (6 thru 12mm); 6-in. socket extension. 3/8-in. Sq. Dr.: Seven 12-pt. sockets (10, 12, 13, 14, 15, 17, 19mm); 13/16-in., 6-pt. spark plug socket; quick-release, reversible ratchet; socket adapter (3/8 to 1/4-in.); 3 ext. bars (1 1/2, 3, 6-in.).

ORDERING INFO: See warranty on opposite page.
9 GT 33246—Wt. 3 lbs. 3 oz. Set \$28.99

1/2-inch Square Drive Excellent for use in repairing cars and power equipment



16-piece STANDARD or METRIC Set **\$34.99**

STANDARD Set

SET COMP: Ten 12-pt. sockets (7/16 thru 1-in.); 13/16-in., 6-pt. spark plug socket; quick-release, reversible ratchet; universal joint; 2 ext. bars (3, 6-in.); Permanex plastic case.

ORDER INFO: See warranty on opposite page. Wt. 6 lbs. 3 oz.
9 GT 44094 Set \$34.99

METRIC Set

SET COMPOSITION: Same as Standard Set but with ten 12-pt. sockets (9 thru 15, 17, 19, 22mm).

ORDER INFO: See warranty on opposite page. Wt. 5 lbs. 15 oz.
9 GT 44098 Set \$34.99



CRAFTSMAN® Heavy-duty Industrial Tools can handle tough jobs... large drive sizes give added strength for heavier load requirements

FULL UNLIMITED WARRANTY ON CRAFTSMAN HAND TOOLS. If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store in the U.S. and Sears will replace it, free of charge. This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



74 OTHER
PIECES

17
COMBINATION
WRENCHES

11 OPEN-END
WRENCHES

3/8-IN. DRIVE:
16 Sockets,
6 Accessories

1/2-IN. DRIVE:
19 Sockets,
7 Accessories

3/4-IN. DRIVE:
15 Sockets,
6 Accessories

171-piece STANDARD Industrial Tool Set with 3/8, 1/2, 3/4-in. Drives

Separate prices
total \$669.07 **\$479⁰⁰**

SET COMPOSITION:

3/8-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; eight 6-point deep sockets (3/8 thru 1 1/16-in.); eight 12-point sockets (3/8 thru 1 1/16-in.); 10-inch flex T-handle; universal joint; 3 extension bars (3, 6, 10-in.).

1/2-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; ten 12-pt. sockets (1/2 thru 1 1/4-in.); nine 12-pt. deep sockets (1/2 thru 1 1/4-in.); 15-in. flex T-handle; universal joint; slide bar handle; 3 extension bars (3, 6, 10-in.).

3/4-inch Square Drive Parts: Quick-release, reversible ratchet; fifteen 12-point sockets (1 thru 2-in.); flex handle; slide bar handle; 3 extension bars (5, 8, 16-in.).

Wrenches: 17 combination (1/4 thru 1 5/16-in.); 11 open-end (1/4x5/16 thru 1 1/2x1 5/8-in.); 12-inch adjustable wrench.

Miscellaneous Parts: 14-piece hex key set; rolling wedge bar; 2 ball pein hammers (12, 32-ounce); 12-ounce plastic tip hammer; 10 screwdrivers (1/8x4 thru 3/8x12); 7 Phillips screwdrivers (Nos. 0 thru 4, stubby); 12-piece punch and chisel set; cotter key extractor; 3 cold chisels (5/8x12, 3/4x18, 3/4x12-in.); pry bar; 2 Arc Joint® pliers (9 1/2, 16-in.); 8-inch slip-joint pliers; 7-inch diagonal cutting pliers; 8-inch long chain nose pliers; hacksaw with 15 additional blades.

ORDERING INFORMATION: See warranty above and construction on page 125.

Shipping weight 95 pounds.
9 GT 3311NSet \$479.00

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details



27-PIECE
SET



16-PIECE
SET

3/4-in. Square Drive STANDARD Sets

Socket Wrench Sets... excellent for repair work on heavy equipment, such as trucks and tractors

27-piece Set **\$199⁰⁰** | 16-piece Set **\$99⁰⁰**

Our most complete heavy-duty 3/4-inch square drive Socket Wrench Set handles the toughest jobs. Excellent for repairing heavy industrial and farm equipment.

SET COMPOSITION: Twenty-one 12-point sockets (3/8 thru 2 3/8-in.); quick-release reversible ratchet; 18-inch slide bar handle; three extension bars (5, 8, 16-in.); 18-inch flex T-handle.

ORDERING INFO: See warranty above and construction on page 125.

Shipping weight 38 pounds.
9 GT 46305CSet \$199.00

Use our 3/4-inch square drive Socket Wrench Set for heavy-duty repairs. It has the strength that is needed for big jobs.

SET COMPOSITION: Thirteen 12-point sockets (3/8 thru 1 3/4-in.); quick-release, reversible ratchet; 5-inch extension bar; steel tool box.

ORDERING INFO: See Warranty above and construction on page 125. Shpg. wt. 19 lbs. 10 oz.

9 GT 46306CSet \$99.00



124 Sears COMPBK SLAEGUD

22-PC.
SET

Sears 22-piece 1-inch Square Drive STANDARD Set

For exceptionally heavy-duty farm and industrial repair work on trucks, tractors, buses

\$499⁰⁰

CONSTRUCTION: Alloy steel. Heat-treated and tempered. Nickel-chrome plated to resist rust.

SET COMP: Seventeen 12-point sockets (1 1/16, 1 1/2, 1 5/8, 1 11/16, 1 3/4, 1 13/16, 1 7/8, 2, 2 1/8, 2 1/16, 2 1/4, 2 3/8, 2 1/2, 2 5/8, 2 3/4, 2 11/16, 3 1/8-in.); 2 extension bars (8, 17-in.); reversible ratchet; slide bar handle; metal case.

ORDER INFO: Not Craftsman. See Shipping Note on pg. 14.
T9 GT 47969N—Shipping weight 88 pounds...Set \$499.00

CONSTRUCTION: CRAFTSMAN flat wrenches, sockets, ratchets and ratchet accessories are of alloy steel, heat treated for extra strength, "oil-quenched" and tempered to uniformly harden these tools, so there are no inner soft spots, then finished with a heavy nickel-chrome plating for rust and corrosion resistance.

CRAFTSMAN sockets have thin sidewalls to allow work where there is limited clearance. Modern methods of production make possible the thin-wall construction on CRAFTSMAN sockets without loss of strength, which is needed for heavy work without breaking or failing.

CRAFTSMAN® METRIC or STANDARD

Socket and Wrench Sets

Increase the versatility of your tool set ...
all in 1/4, 3/8 and 1/2-inch Drive Sizes



4 WRENCHES AND
42 OTHER PIECES

3/8-IN. DRIVE:
8 Sockets

1/4-IN. DRIVE:
7 Sockets



16 WRENCHES

41 OTHER PIECES

1/2-IN. DRIVE:
9 Sockets

3/8-IN. DRIVE:
8 Sockets

1/4-IN. DRIVE:
9 Sockets

61-piece STANDARD or METRIC Tool Set

Standard Set

Sep. prices
total \$76.62 **\$39.99**

Metric Set

Sep. prices
total \$78.32 **\$39.99**

STANDARD SET COMPOSITION:

1/4-inch Square Drive: Seven 6-point sockets (sizes 3/32, 1/16, 1/8, 5/32, 3/16, 1/4, 1/2-inch).

3/8-inch Square Drive: Seven 12-point sockets (sizes 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-inch); quick-release, reversible ratchet; 5/8-inch spark plug socket; socket adapter (sizes 3/8 to 1/4-inch); plus 3-inch extension bar.

Wrenches: Four open-end wrenches (1 1/4x3/16, 3/8x3/16, 1/2x9/16, 5/8x3/4-inch).

Miscellaneous Tools: 20-piece hex key set; No. 2 Phillips screwdriver; 3/16x4-inch standard screwdriver; 5-piece magnetic insert set; hacksaw with 10 extra blades.

Steel Tool Box: Gray baked-enamel finish. Tote tray.

ORDERING INFORMATION: See Warranty on opposite page. Construction features are above.

Shipping wt. 11 lbs. 13 oz.
9 GT 33175Set \$39.99

METRIC SET COMPOSITION:

1/4-inch Square Drive: Seven 6-point sockets (sizes 4, 5, 6, 7, 8, 9, 10mm).

3/8-inch Square Drive: Seven 12-point sockets (sizes 11, 12, 13, 14, 15, 17, 19mm); quick-release, reversible ratchet; 5/8-inch spark plug socket; socket adapter (3/8 to 1/4-inch); 3-inch extension bar.

Wrenches: Four open-end wrenches (sizes 7x9, 10x11, 12x14, 13x15mm).

Miscellaneous Tools: 20-piece metric hex key set; No. 2 Phillips type screwdriver; 3/16x4-inch standard screwdriver; 5-piece magnetic insert set; also includes hacksaw with 10 extra blades.

Steel Tool Box: Gray baked-enamel finish. Tote tray.

ORDERING INFORMATION: See Warranty on the opposite page. Construction features are above.

Shipping wt. 11 lbs. 14 oz.
9 GT 33176Set \$39.99

83-piece STANDARD or METRIC Mechanics' Tool Set

Standard Set

Sep. prices total \$129.75 **\$79.99**

Metric Set

Sep. prices total \$130.75 **\$79.99**

CONSTR: Every CRAFTSMAN® flat wrench, socket, ratchet and ratchet accessory is made of alloy steel, heat treated, then "oil-quenched" and tempered. Nickel-chrome plated.

STANDARD SET COMPOSITION:

1/4-inch Square Drive Parts: Nine 6-point sockets (sizes 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2-inch); 6-inch socket extension.

3/8-inch Square Drive Parts: Seven 12-point sockets (sizes 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-inch); quick-release, reversible ratchet; 13/16-inch spark plug socket and 6-inch extension bar.

1/2-inch Square Drive Parts: Nine 12-point sockets (sizes 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1-inch); quick-release, reversible ratchet; 3-inch extension bar.

Wrenches: Six open-end wrenches (sizes 1 1/4x5/16, 3/8x7/16, 1/2x9/16, 9/16x11/16, 5/8x3/4, 13/16x29/32-inch) plus 10-piece combination ignition wrench set.

Miscellaneous Tools: 14-piece hex key set; 2 standard screwdrivers (3/16x4, stubby); No. 2 Phillips screwdriver; pin punch; center punch; 5-piece magnetic insert set; hacksaw with 10 additional blades.

Steel Tool Box: Gray baked-enamel finish. Removable tote tray.

ORDERING INFORMATION: See warranty on opposite page.

Shipping weight 9 pounds.
9 GT 33087CSet \$79.99

METRIC SET COMPOSITION:

1/4-inch Square Drive Parts: Nine 6-point sockets (4, 5, 6, 7, 8, 9, 10, 11, 12mm) plus 6-inch socket extension.

3/8-inch Square Drive Parts: Seven 12-point sockets (9, 10, 12, 13, 14, 15, 17mm); quick-release, reversible ratchet; 13/16-inch spark plug socket plus 6-inch extension bar.

1/2-inch Square Drive Parts: Nine 12-point sockets (10, 11, 12, 13, 14, 15, 17, 19, 22mm); quick-release, reversible ratchet plus 3-inch extension bar.

Wrenches: Six open-end wrenches (6x8mm, 7x9mm, 10x11mm, 12x14mm, 13x15mm, 17x19mm); 10-pc. combination wrench set.

Miscellaneous Tools: 14-pc. metric hex key set; 3/16x4-in., stubby and No. 2 Phillips screwdrivers; pin punch; center punch; 5-pc. magnetic insert set; hacksaw, 10 extra blades.

Steel Tool Box: Gray, baked-enamel finish. Removable tote tray.

ORDER INFO: Warranty on opposite page.
9 GT 33022C—Wt. 16 lbs.Set \$79.99

More Mechanics' Tool Sets
on the next 9 pages

77-piece METRIC Add-on Set Save \$80.96 Separate prices total \$180.95 **\$99.99**

SET COMPOSITION:

1/4-inch Square Drive: Nine 6-point sockets (sizes 4, 5, 6, 7, 8, 9, 10, 11, 12mm); eleven 6-point deep sockets (sizes 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm).

3/8-inch Square Drive: Eleven 12-point sockets (sizes 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm); eleven 6-point deep sockets (sizes 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm).

1/2-inch Square Drive: Sixteen 12-point sockets (sizes 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30, 32mm); five 12-point deep sockets (sizes 14, 17, 19, 22, 27mm).

Wrenches: 14 combination wrenches (6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24mm).

ORDERING INFO: See warranty, opposite page. Construction features are above.
9 GT 33102—Shipping weight 12 pounds 14 ouncesSet \$99.99

40-piece Set (not shown). Save \$42.85. Separate prices total \$85.84.

SET COMPOSITION:


1/4-inch Square Drive: Eight 6-point sockets (sizes 4, 5, 6, 7, 8, 9, 10, 11mm).

3/8-inch Square Drive: Nine 12-point sockets (sizes 9, 10, 11, 12, 13, 14, 15, 17, 19mm).

1/2-inch Square Drive: Six 12-point sockets (sizes 13, 14, 15, 17, 19, 22mm).

Wrenches: Six open-end (sizes 6x8, 7x9, 10x11, 12x14, 13x15, 17x19mm); eleven combination (sizes 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17mm).

ORDERING INFO: Warranty on opposite page. Construction features above.
9 GT 33101—Shipping weight 4 pounds 7 ouncesSet \$42.99

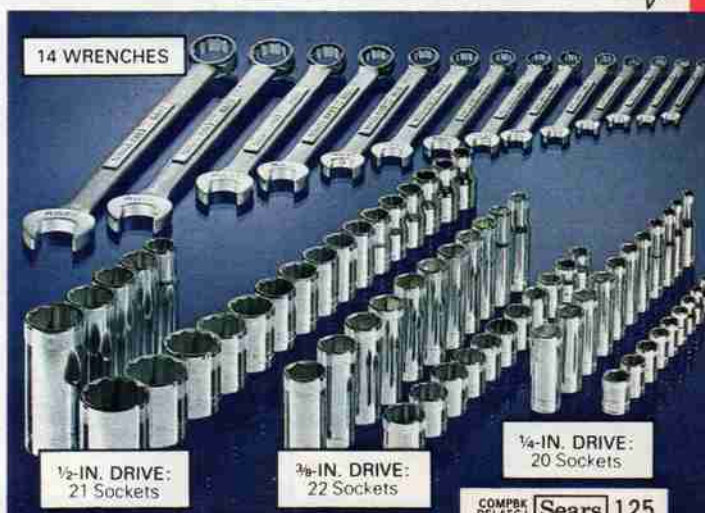

14 WRENCHES

1/2-IN. DRIVE:
21 Sockets

3/8-IN. DRIVE:
22 Sockets

1/4-IN. DRIVE:
20 Sockets



CRAFTSMAN® STANDARD or METRIC -Size Mechanics'

CONSTR: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select alloy steel—specially chosen because of its strength and resistance to brittleness. Each piece is heat-treated, then oil-quenched and tempered to uniformly "through-harden" it so there are no inner soft spots. Nickel-chrome plating adds rust resistance.

FULL UNLIMITED WARRANTY ON CRAFTSMAN HAND TOOLS: If any CRAFTSMAN hand tool ever fails to give complete satisfaction, return it to nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

97-piece STANDARD Set

Separate prices
total \$182.26 **\$99.99**

SET COMPOSITION:

1/4-inch Square Drive Parts: Quick-release, reversible ratchet; nine 6-point sockets (3/16, 7/32, 1/4, 5/32, 5/16, 11/32, 3/8, 7/16, 1/2-inch); 3-inch extension bar. Includes Permanex plastic case.

3/8-inch Square Drive Parts: Quick-release, reversible ratchet; seven 12-point sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-inch); 3-inch and 6-inch extension bars; 5/8-inch spark plug socket; universal joint.

1/2-inch Square Drive Parts: Quick-release, reversible ratchet; eleven 12-point sockets (7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16-inch); 6-inch extension bar; 1 1/16-inch spark plug socket.

Wrenches: 8 combination wrenches (5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-inch); 10-piece combination ignition wrench set; 3 short, box-end wrenches (3/8x7/16, 1/2x9/16, 5/8x3/4-inch).

Miscellaneous Tools: 14-piece hex key set; 5-piece magnetic insert set; two standard screwdrivers (sizes 3/16x4-inch and 1/4x6-inch); No. 2 Phillips screwdriver; center punch (3/8x4 1/2-inch); pin punch (5/8x2-inch); chisel (1 1/2x6-inch); ignition gauge; hacksaw with 10 additional blades.

Steel Tool Box: Full length piano-type hinge; heavy-duty handle, partitioned tray. Gray baked-enamel finish.

ORDERING INFORMATION: See warranty and construction features above.
9 GT 33099C—Shipping weight 24 pounds.....Set \$99.99

97-piece METRIC Set

Separate prices
total \$181.36 **\$99.99**

SET COMPOSITION:

1/4-inch Square Drive Parts: Quick-release, reversible ratchet; nine 6-point sockets (4 thru 12mm); 3-inch extension bar. Includes Permanex plastic case.

3/8-inch Square Drive Parts: Quick-release, reversible ratchet; seven 12-point sockets (9, 10, 12, 13, 14, 15, 17mm); 3-inch and 6-inch extension bars; 5/8-inch spark plug socket; universal joint.

1/2-inch Square Drive Parts: Quick-release, reversible ratchet; eleven 12-point sockets (10, 11, 12, 13, 14, 15, 17, 19, 22, 24, 27mm); 6-inch extension bar; 1 1/16-inch spark plug socket.

Wrenches: 8 combination wrenches (6, 7, 8, 9, 10, 12, 13, 14mm); 10-piece combination ignition wrench set; 3 box-end wrenches (6x8 thru 10x11mm).

Miscellaneous Tools: 14-piece hex key set; two standard screwdrivers (3/16x4-inch, 1/4x6-inch); No. 2 Phillips screwdriver; center punch (3/8x4 1/2-inch); pin punch (5/8x2-inch); chisel (1 1/2x6-inch); 5-piece magnetic insert set; ignition gauge; hacksaw with 10 additional blades.

Steel Tool Box: Full length piano-type hinge, heavy-duty handle, partitioned tray. Gray baked-enamel finish.

ORDERING INFORMATION: See warranty and construction features above.
9 GT 33031C—Shipping weight 22 pounds.....Set \$99.99



Tool Sets in 1/4, 3/8 and 1/2-inch Square Drive Sizes



133-Piece **STANDARD** Mechanics' Tool Set

Separate prices
total \$345.41 **\$219⁰⁰**

133-pc. Tool Set, plus Chest and Cabinet

Separate prices
total \$490.39 **\$339⁰⁰**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” these tools, so there are no inner soft spots. Nickel-chrome plated to resist rust and corrosion.

OUTFIT COMPOSITION:

1/4-inch Square Drive Parts: Includes fine-tooth, quick-release, reversible ratchet; nine 6-point sockets (sizes 3/16, 7/32, 1/4, 5/32, 3/8, 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12-in.); crossbar; 6-inch flex-T-handle and 2 extension bars (sizes 3, 6-in.). Permanex plastic case.

3/8-inch Square Drive Parts: Includes fine-tooth, quick-release, reversible ratchet; seven 12-point sockets (sizes 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12-in.); seven 12-point deep sockets (sizes 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12-in.); two 12-point flex sockets (sizes 1/2, 3/4-in.); 13 1/2-inch, 6-point spark plug socket; crossbar; universal joint; three extension bars (sizes 3, 6 and 10-in.); speeder; slide bar; flex-T-handle.

1/2-inch Square Drive Parts: Includes fine-tooth, quick-release, reversible ratchet; thirteen 12-point sockets (sizes 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12-in.); five 8-point sockets (sizes 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12-in.); eleven 12-point deep sockets (sizes 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12-in.); slide bar; speeder; flex-T-handle and universal joint.

Wrenches: 6 open-end wrenches (3/8x7/16, 1/2x9/16, 19/32x11/16, 5/8x3/4, 3/4x7/8, 15/16x1-in.); 3 short box-end wrenches (1/2x9/16, 5/8x3/4, 3/4x7/8-in.); 6 long box-end wrenches (3/8x7/16, 1/2x9/16, 5/8x3/4, 3/4x7/8, 15/16x1-in.); 3 tapet wrenches (1/2x9/16, 5/8x11/16, 3/4x7/8-in.).

Miscellaneous Tools: 3 standard screwdrivers (sizes 3/16x4, 1/4x6, 5/16x8-in.); 14-pc. hex key set; 2 ball pein hammers (sizes 8, 12-oz.); hacksaw with 10 extra blades.

2-Drawer Chest: See item (3) on page 13.

1-Drawer Cabinet: Same construction as cabinets on pages 138 and 139. Drawer 22 1/4x16 1/2x3 1/8 in. deep. 1 adjustable shelf. Four 3-in. casters. Unit 26 1/2x18x29 1/4 in. high overall.

ORDERING INFORMATION: See warranty on opposite page.

133-piece Tool Set alone

9 GT 43396C—Shpg. wt. 37 lbs. Set \$219.00

Tool Set with Chest and Cabinet

9 GT 46365N3—Shpg. wt. 121 lbs. 339.00

Chest alone

9 GT 65251C—Shpg. wt. 32 pounds 69.99

Cabinet alone

9 GT 65331N—Shpg. wt. 65 pounds 74.99

2-Drawer
Chest
\$69⁹⁹



1-Drawer
Cabinet
\$74⁹⁹

COMPBK DAGEJL **Sears** 127



All CRAFTSMAN® Mechanics' Tool Sets are backed by our Full Unlimited Warranty

FULL UNLIMITED WARRANTY ON CRAFTSMAN® HAND TOOLS: If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction return it to the nearest Sears store throughout the U.S. and Sears will replace it, free of charge. This warranty gives you specific rights, and you may also have other rights which vary from state to state.



192-piece Mechanics' Tool Set (1/4, 3/8 and 1/2-inch square drive)

Separate prices
total \$464.06 **\$319⁰⁰**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select alloy steel which is specially chosen because of its strength and its resistance to brittleness. Heat-treated then oil-quenched and tempered to uniformly "through-harden" tools so there are no inner soft spots. Nickel-chrome plated to resist rust, corrosion.

OUTFIT COMPOSITION:

1/4-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 12-pt. sockets (3/16, 7/32, 1/4, 5/32, 3/16, 11/32, 5/8, 7/16, 1/2-inch); nine deep 6-pt. sockets (3/16, 7/32, 1/4, 5/32, 3/16, 11/32, 5/8, 7/16, 1/2-inch); 6-in. flex T-handle; 2 extension bars (3.6-in.); universal joint; Permatex plastic case.

3/8-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; seven 12-pt. sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-in.); seven deep 12-pt. sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-in.); seven 6-pt. flex sockets (3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4-in.); 3/8-inch spark plug socket; flex T-handle; 3 extension bars (3, 6, 10-in.); universal joint.

1/2-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; thirteen 12-pt. sockets (7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8-in.); eleven deep 12-pt. sockets (1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8-in.); 1 1/8-in. 6-pt. spark plug socket; flex T-handle; 3 extension bars (3, 6, 10-in.); universal joint.

Tool Set, Chest and Cabinet

Separate prices
total \$672.04 **\$499⁹⁹**

Wrenches: 14 combination wrenches (1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1-in.); 3 short box-end wrenches (1/2x3/16, 5/8x3/4, 3/4x7/16); 8-pc. open-end ignition wrench set; 10-pc. combination ignition wrench set; 3 flare nut wrenches (1/2x9/16, 5/8x11/16, 3/4x7/16-in.); 8-inch adjustable.

Miscellaneous Parts: 13-pc. tap and die set; Arc Joint® pliers; diagonal cutting pliers; ignition pliers; slip joint pliers; locking pliers; 7 nut drivers (7/16, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2-in.); four standard screwdrivers (3/16x4, 1/4x6, 5/16x8, stubby); 4 Phillips screwdrivers (Nos. 1, 2, 3, stubby); 5-pc. magnetic insert kit; 14-pc. hex key set; 5-pc. punch, chisel set; ignition gauge; 12-oz. ball peen hammer; hacksaw, 10 extra blades.

3-drawer Chest: Same construction as chests on p. 138. Drawers measure 10 3/4 inches from front to back, 22 1/2 inches wide. One drawer 17 1/8 inches deep, one 21 1/8 inches deep, one 31 1/8 inches deep. Removable tote tray 18 1/2x7 1/2x1 1/2 inches deep.

3-drawer Cabinet: See item (4) on page 138.

ORDERING INFORMATION: See warranty above.

192-piece Tool Set alone.

9 GT 43397C—Shipping weight 40 pounds \$319.00

Tool Set with Chest.

9 GT 46366L2—Shipping weight 86 pounds 396.99

Tool Set with Chest and Cabinet.

9 GT 46367N3—Shipping weight 175 pounds 499.99



**Sears Has a Credit Plan
to Suit Most Every Need**
See Big Book or ask for details

59-PC. TAP
AND DIE SET

48 WRENCHES

61 OTHER
PIECES

1/2-IN. DRIVE:
25 Sockets
11 Accessories

3/8-IN. DRIVE:
27 Sockets
9 Accessories

1/4-IN. DRIVE
15 Sockets
7 Accessories

262-piece Mechanics' Tool Set (1/4, 3/8 and 1/2-inch square drive)

Separate prices
total \$596.74 **\$419⁰⁰**

Tool Set, Chest and Cabinet

Separate prices
total \$836.72 **\$619⁰⁰**

CONSTRUCTION: Every CRAFTSMAN® flat wrench, socket, ratchet and ratchet accessory is made from alloy steel. Heat-treated, then oil-quenched and tempered. Nickel-chrome plated to resist rust, corrosion.

OUTFIT COMPOSITION: 1/4-in. Square Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 6-pt. sockets (3/16 thru 1/2-in.); six 12-pt. sockets (9/32 thru 1/2-in.); 2 extension bars (3, 6-in.); 6-in. flex T-handle; cross bar; 4 1/2-inch slide bar; Permanex plastic case.

3/8-in. Square Drive Parts: Fine-tooth, quick-release reversible ratchet; eight 12-pt. sockets (3/8 thru 13/16-inch); five 8-pt. sockets (1/4 thru 1/2-inch); eight 12-pt. deep sockets (3/8 thru 13/16-inch); five 12-pt. flex sockets (3/8 thru 5/8-inch); No. 2 Phillips bit socket; universal joint; 3 extension bars (3, 6, 10-inch); 16-in. speeder; 7-in. slide bar; cross bar; 10-in. flex T-handle.

1/2-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; fourteen 12-pt. sockets (7/16 thru 1 1/4-in.); eleven 12-pt. deep sockets (1/2 thru 1 1/8-in.); univ. joint; 4 extension bars (3, 6, 10, 20-in.); 18-in. speeder; 9-in. slide bar; cross bar; stud extractor; 15-in. flex T-handle.

Wrenches: 8 open-end wrenches (1/4x5/16, 3/8x7/16, 1/2x9/16, 19/32x11/16, 5/8x3/4, 13/16x25/32, 3/4x7/8 and 15/16x1-in.); 6 combination wrenches (7/16, 1/2, 3/8, 11/16 and 3/4-in.); 7 long box-end wrenches (3/8x7/16, 1/2x9/16, 3/4x1 1/8, 19/32x25/32, 11/16x13/16, 3/4x7/8 and 15/16x1-in.); 3 short box-end wrenches (1/2x9/16, 3/4x1 1/8 and 15/16x1-in.); 2 ratcheting box-end wrenches (3/8x7/16, 1/2x9/16); 3 tappet wrenches (1/2x9/16, 5/8x1 1/8 and 3/4x7/16-in.); 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 8-in. adjustable wrench.

Miscellaneous Parts: 59-pc. tap and die set; 14-pc. hex key set; variable-size nut driver; 5-pc. magnetic insert set; 2 ball pein hammers (8 and 12-oz.); ignition gauge; 3 Phillips screwdrivers (Nos. 1, 2 and 3); offset screwdriver; 4 standard screwdrivers (3/16x4, 1/4x6, 5/16x8 and stubby); 12-in. pick-up tool; 12-in. line-up punch; 12-pc. punch and chisel set; cotter key extractor; long-nose pliers; 10-in. locking pliers; Arc Joint® pliers; brake adjusting tool; hacksaw, 10 extra blades.

Chest and Cabinet: See items (6) and (7) on page 138.

ORDERING INFORMATION: See warranty on opposite page.

9 GT 46372N3—Tool Set, Chest, Cabinet. Wt. 224 lbs. \$619.00

9 GT 46371L2—Tool Set plus Chest. Wt. 117 lbs. 508.00

9 GT 33035L—262-piece Tool Set alone. Wt. 63 lbs. 419.00





59-PC. TAP AND
DIE SET

1/4-INCH DRIVE:
28 Standard, 20
Metric Sockets,
13 Accessories

3/8-INCH DRIVE:
52 Standard, 22
Metric Sockets,
23 Accessories

with Sockets in **STANDARD** and **METRIC** Sizes



Full Unlimited Warranty on CRAFTSMAN Hand Tools. If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

483-piece Mechanics' Tool Set

Separate prices
total \$1221.38 **\$799⁰⁰**

483-piece Tool Set plus Chest and Cabinet

Separate prices
total \$1533.36 **\$1050⁰⁰**



10-Drawer
Chest

9-Drawer
Cabinet

CONSTRUCTION: Every Craftsman flat wrench, socket, ratchet, ratchet accessory is made from a select alloy steel—specially chosen because of its strength and resistance to brittleness. Heat-treated, oil quenched, tempered for uniform hardness. Nickel-chrome plated to resist rust and corrosion.

OUTFIT COMPOSITION:

1/4-inch Standard Square Drive Parts:

Fine tooth, quick release ratchet; ten 6-pt. sockets ($\frac{5}{32}$ thru $\frac{1}{2}$ -in.); nine 12-pt. sockets ($\frac{3}{16}$ thru $\frac{1}{2}$ -in.); 5 hex bit sockets ($\frac{3}{16}$ thru $\frac{3}{8}$ -in.); 2 screwdriver bit sockets (.030, .039); 2 Phillips bit sockets (Nos. 1, 2); universal joint; socket drive adapter ($\frac{1}{4}$ to $\frac{3}{8}$ -in.); 2 socket extensions ($\frac{1}{2}$, 6-in.); $\frac{1}{4}$ -in. flex extension; speeder; 3 extension bars (3, 6, 14-in.); 6-in. flex T-handle; $\frac{1}{4}$ -in. slide bar; flex spinner.

1/4-inch Metric Square Drive Parts:

Nine 6-pt. sockets (4 thru 12mm); eleven 6-pt. deep sockets 4 thru 14mm).

3/8-inch Standard Square Drive Parts:

Fine-tooth, quick-release, reversible ratchet; eight 6-point sockets ($\frac{3}{8}$ thru $\frac{3}{16}$ -in.); eight 12-point sockets ($\frac{3}{8}$ thru $\frac{13}{16}$ -in.); five 8-point sockets ($\frac{1}{4}$ thru $\frac{1}{2}$ -in.); nine 12-point deep sockets ($\frac{3}{8}$ thru $\frac{7}{8}$ -in.); seven 6-point flex sockets ($\frac{3}{8}$ thru $\frac{3}{4}$ -in.); two 6-point spark plug sockets ($\frac{5}{8}$, $\frac{13}{16}$ -in.); $\frac{13}{16}$ -in. flex spark plug socket; universal joint; 2 socket adapters ($\frac{1}{4}$, $\frac{1}{2}$ -in.); 3 screwdriver bit sockets (.030, .039, .055); 4 extension bars (3, 6, 10, 20-in.); 10-in. flex T-handle; speeder; ell handle; slide bar; cross bar; 3 Phillips screwdriver bit sockets (Nos. 2, 3, 4); 6 hex bit sockets ($\frac{3}{16}$ thru $\frac{3}{8}$ -in.); 10 crowfoot wrenches ($\frac{3}{8}$ thru 1-in.).

3/8-inch Metric Square Drive Parts:

Eleven 12-pt. sockets (9–19mm); eleven 12-pt. deep sockets (9–19mm).

1/2-inch Standard Square Drive Parts:

Fine-tooth, quick-release reversible ratchet; thirteen 6-pt. sockets ($\frac{7}{16}$ thru $1\frac{1}{4}$ -in.); sixteen 12-pt. sockets ($\frac{7}{16}$ thru $1\frac{1}{4}$ -in.); twelve 12-pt. deep sockets ($\frac{1}{2}$ thru $1\frac{1}{4}$ -in.); universal joint; socket drive adapter ($\frac{1}{2}$ to $\frac{3}{8}$ -in.); 4 extension bars (3, 6, 10, 20-in.); 2 slide bars (9, 15-in.); ell handle; 18-inch speeder; 2 flex T-handles (15, 18-in.); crossbar.

1/2-inch Metric Square Drive Parts:

Sixteen 12-pt. sockets (9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30 and 32mm); five 12-pt. deep sockets (14, 17, 19, 22 and 27mm).

Standard Wrenches:

16 combination wrenches ($\frac{1}{4}$ thru $1\frac{1}{4}$ -in.); 9 open-end wrenches ($\frac{1}{4}$ x $\frac{3}{16}$ thru $1\frac{1}{2}$ x $1\frac{1}{4}$ -in.); 11 box-end wrenches ($\frac{1}{4}$ x $\frac{3}{16}$ thru $1\frac{1}{2}$ x $1\frac{1}{4}$ -in.); 3 short box-end wrenches ($\frac{3}{8}$ x $\frac{7}{16}$ thru $\frac{5}{8}$ x $\frac{3}{4}$ -in.); 5 tappet wrenches ($\frac{3}{8}$ thru $\frac{7}{8}$ -in.); 3 flare nut wrenches ($\frac{3}{8}$ x $\frac{7}{16}$ thru $\frac{5}{8}$ x $1\frac{1}{2}$ -in.); 8-pc. open-end ignition wrench set; 2 adjustable wrenches (8, 10-in.); 5-pc. ratcheting box-end wrench set; 10-pc. combination ignition wrench set.

Metric Wrenches:

14 comb. wrenches (6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 and 24mm).

Miscellaneous Parts:

7 nut drivers ($\frac{3}{16}$ thru $\frac{1}{2}$ -in.); variable-size nut driver; 11 standard-size screwdrivers ($\frac{1}{4}$ x2 thru $\frac{5}{16}$ x8 in.); Reed Prince screwdriver; 7 Phillips screwdrivers (Nos. 0, 1, 4 and 8-in. No. 2 stubby, No. 2, No. 3); offset screwdriver; 4 screw-holding drivers ($\frac{1}{4}$ x2 $\frac{1}{2}$, 4-in., $\frac{3}{16}$ x5, 7-in.); 12-inch pickup tool; bent needle nose pliers; battery pliers; chain-nose pliers; ignition pliers; diagonal cutting pliers; Arc-joint® pliers; 2 locking pliers (7 $\frac{1}{2}$, 10-inch); 3 slip-joint pliers (6 $\frac{3}{4}$, 8-inch, thin nose) 3 ball-pein hammers (4, 8, 12-oz.); 8-oz. plastic-tip hammer; 14-piece combination hex-key set; 11-pc. short-arm hex-key set; ignition gauge; brake adjusting tool; hacksaw; 10 extra blades; rolling wedge bar; stainless steel rule; cotter key extractor; compound leverage snips; 12-inch line-up punch; 12-piece punch chisel set; torque wrench; 59-piece tap and die set.

10-drawer Chest:

Same construction as chests on pages 138 and 139. Drawers 10 $\frac{3}{4}$ in. front to back. Top center drawer 4 $\frac{1}{2}$ in. wide, 6 $\frac{1}{4}$ in. deep. 6 top drawers 7 $\frac{3}{4}$ in. wide, 1 $\frac{3}{4}$ in. deep. 3 drawers 22 $\frac{1}{2}$ in. wide; two 1 $\frac{3}{4}$ in. deep, one 2 $\frac{3}{4}$ in. deep. Tote tray 18 $\frac{1}{2}$ x7 $\frac{1}{2}$ x1 $\frac{1}{2}$ in. deep. 26x12x19 inches high.

9-drawer Cabinet:

Same construction as cabinets on pages 138 and 139. Drawers 16 $\frac{3}{4}$ in. front to back. 4 drawers 10 $\frac{1}{2}$ in. wide, 3 $\frac{1}{4}$ in. deep. 5 drawers 22 $\frac{1}{4}$ in. wide; two 3 $\frac{1}{4}$ in. deep, two 4 $\frac{3}{4}$ in. deep, one 6 $\frac{1}{16}$ in. deep. 26 $\frac{1}{2}$ x18x38 $\frac{3}{4}$ in. high.

ORDERING INFORMATION: See warranty above.

9 GT 46401N2—Tool Set alone. Shipping weight 118 pounds \$799.00

9 GT 43403N4—Complete Outfit. Shipping weight 337 pounds 1050.00

1/2-INCH DRIVE:
41 Standard, 21
Metric Sockets,
14 Accessories



1/4-INCH DRIVE:
Parts include 28
standard and 20
metric sockets,
plus 20 accessories

3/8-INCH DRIVE:
Parts include 50
standard and 52
metric sockets,
plus 36 accessories

1/2-INCH DRIVE:
Parts include 58
standard and 37
metric sockets,
plus 14 accessories

and **METRIC** Mechanics' Tool Set... the largest we offer

805-Piece Set

Separate prices
total \$2655.97

\$1899⁰⁰

With this wide selection of standard and metric tools, it's possible to perform more automotive and industrial repairs than with any other set we sell. And you'll never have to pay for replacing any of these tools because they're all backed by our famous Full Unlimited Warranty.

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from alloy steel—specially chosen for its overall toughness and strength. Heat-treated, then oil-quenched and tempered to uniformly "through-hardened" tools so there are no inner soft spots. Nickel chrome-plating adds rust and corrosion resistance.

SET COMPOSITION:

1/4-inch Square Drive Parts: Ten 6-point sockets ($\frac{5}{32}$ thru $\frac{1}{2}$ -in.); nine 6-point deep sockets ($\frac{3}{16}$ thru $\frac{1}{2}$ -in.); nine 12-point sockets ($\frac{3}{16}$ thru $\frac{1}{2}$ -in.); nine 6-point metric sockets (4 thru 12mm); eleven 6-point metric deep sockets (4 thru 14mm); fine tooth, quick-release reversible ratchet; universal joint; socket adapter ($\frac{1}{4}$ to $\frac{3}{8}$ -in.); 4 screwdriver bit sockets (Phillips Nos. 1, 2; .030, .039); 5 hex bit sockets ($\frac{3}{16}$ thru $\frac{3}{8}$ -in.); flex extension; 6-in. socket extension; 4 extension bars ($\frac{1}{2}$, 3, 6, 14-in.); 6 in. flex T-handle; speeder.

3/8-inch Square Drive Parts: Eight 6-point sockets ($\frac{3}{8}$ thru $\frac{1}{2}$ -in.); eight 12-point sockets ($\frac{3}{8}$ thru $\frac{1}{2}$ -in.); five 8-point sockets ($\frac{1}{4}$ thru $\frac{1}{2}$ -in.); nine 6-point deep sockets ($\frac{3}{8}$ thru $\frac{1}{2}$ -in.); nine 12-point deep sockets ($\frac{3}{8}$ thru $\frac{1}{2}$ -in.); seven 6-point flex sockets ($\frac{3}{8}$ thru $\frac{1}{2}$ -in.), plus case; four 6-point spark plug sockets ($\frac{5}{8}$, $\frac{13}{16}$, $\frac{5}{8}$, $\frac{13}{16}$ -in. flex); nine 6-point metric sockets (9 thru 15, 17, 19mm); eleven 12-point metric sockets (9 thru 19mm); eleven 6-point metric deep sockets (9 thru 19mm); ten 6-point metric flex sockets (10 thru 19mm) plus metal tray; fine-tooth quick release, reversible ratchet; quick-release flex ratchet; universal joint; 2 socket adapters ($\frac{1}{4}$, $\frac{1}{2}$ -in.); 3 screwdriver bit sockets (.030, .039, .055); 5 extension bars ($\frac{1}{2}$, 3, 6, 10, 20-in.); 10-in. flex T-handle; 3 Phillips screwdriver bit sockets (Nos. 2, 3, 4); Six hex bit sockets ($\frac{3}{16}$ thru $\frac{3}{8}$ -in.); 10 crowfoot wrenches ($\frac{3}{8}$ thru 1-in.); 16-in. speeder.

1/2-inch Square Drive Parts: Thirteen 6-point sockets ($\frac{7}{16}$ thru $1\frac{1}{4}$ -inches); six 8-point sockets ($\frac{7}{16}$ thru $\frac{3}{4}$ -in.); thirteen 12-point sockets ($\frac{7}{16}$ thru $1\frac{1}{4}$ -in.); eleven 12-point deep sockets ($\frac{1}{2}$ thru $1\frac{1}{4}$ -in.); $\frac{13}{16}$ -inch, 6-point spark plug socket; ten 6-point impact sockets ($\frac{7}{16}$ thru 1-in.), plus metal tray; ten 6-point metric sockets (9 thru 15, 17, 19, 22mm); eighteen 12-point metric sockets (9 thru 19, 21, 22, 24, 27, 30, 32, 36mm); six 12-point metric deep sockets (14, 17, 19, 21, 22, 27mm); three 6-point metric impact sockets (19-21mm); four drag link sockets ($\frac{3}{16}$, $\frac{3}{4}$, $\frac{15}{16}$, $\frac{13}{16}$ -in.); fine-tooth, quick-release, reversible ratchet; quick-release, flex ratchet; universal joint; socket adapter ($\frac{1}{2}$ to $\frac{3}{8}$ -in.); 5 extension bars (2, 3, 6, 10, 20-in.); 2 flex T-handles (15, 18-in.); stud extractor; 18-in. speeder.

3/4-inch Square Drive Parts: Twenty-one 12-point sockets ($\frac{7}{8}$ thru $2\frac{3}{4}$ -inches); quick-release ratchet; 3 extension bars (5, 8, 16-inches); 18-inch flex T-handle; 18-inch slide bar.

Standard Wrenches: 6-piece combination socket and open-end wrench set; 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 3-piece flare nut wrench set; 3 short box end wrenches ($\frac{1}{2}$ x $\frac{3}{16}$, $\frac{3}{8}$ x $\frac{3}{4}$, $\frac{3}{8}$ x $\frac{7}{16}$ -in.); 12 long box-end wrenches ($\frac{1}{4}$ x $\frac{5}{16}$ thru $1\frac{1}{16}$ x $1\frac{1}{2}$ -in.); 5 tappet wrenches ($\frac{3}{8}$ x $\frac{7}{16}$ thru $\frac{3}{4}$ x $\frac{7}{8}$ -in.); 12 open-end wrenches ($\frac{1}{4}$ x $\frac{5}{16}$ thru $1\frac{1}{2}$ x $1\frac{1}{2}$ -in.); 18 combination wrenches ($\frac{1}{4}$ thru $1\frac{1}{2}$ -in.); 5-piece ratcheting box-end wrench set; 4 adjustable wrenches (6, 8, 10, 12-inch); starter and manifold wrench.

Metric Wrenches: 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 5-piece ratcheting box-end wrench set; 5-piece flare nut wrench set; 25 combination wrenches (6 thru 32mm); 13 box-end wrenches (6x8 thru 28x32mm); 14 open-end wrenches (6x8 thru 30x32mm).

Miscellaneous Parts: 59-piece standard tap and die set; 59-piece metric tap and die set; 7-piece standard nut driver set; 7-piece metric nut driver set; 14-piece standard hex key set; 20-piece metric hex key set; 11-piece standard hex key set; 2 standard long hex keys ($\frac{3}{8}$, $\frac{1}{2}$ -in.); 2 metric long hex keys (9, 10mm); 2 metric hex keys with pouches (12, 17mm); 5-piece magnetic insert set; 16-inch rolling wedge bar; ignition file; 2 half round files (8, 10-inch); 6-inch round file; 10-inch mill file; scratch awl; 8-ounce plastic tip hammer; 4 ball pein hammers (4, 8, 12, 32-ounce); 6-inch rule; ignition gauge; metric feeler gauge; non-magnetic feeler gauge; gap gauge; screwholding starter; offset screwdriver; 7 Phillips screwdrivers (Nos. 0, 1, 2, 2x8, 3, 4, No. 2 stubby); 11 standard screwdrivers ($\frac{1}{4}$ x2, $\frac{3}{16}$ x4, $\frac{3}{16}$ x9, $\frac{1}{4}$ x4, $\frac{1}{4}$ /6, $\frac{1}{4}$ x12, $\frac{3}{16}$ x13, $\frac{3}{16}$ x8, $\frac{3}{8}$ x12, $\frac{1}{2}$ x4, stubby); 12-inch pickup tool; compound leverage snips; 12-inch line-up punch; 12-piece punch and chisel set; 2 cold chisels ($\frac{3}{4}$ x12-inch); cotter key extractor; universal nut cracker; adjustable torque wrench; bent needle-nose pliers; battery pliers; diagonal cutting pliers; 6-inch diagonal cutting pliers; long chain nose pliers; ignition pliers 2 locking pliers ($\frac{7}{16}$, 10-inch); snap ring pliers; thin nose pliers; slip joint pliers; 8-inch slip joint pliers; 2 Arc Joint® pliers (12 $\frac{1}{2}$, 16-inch); Arc Joint® pliers; brake spring pliers; hose clamp pliers; brake adjusting tool; gasket scraper; pry bar; hacksaw; 30 extra blades.

805-piece Mechanics' Tool Set alone.

ORDERING INFORMATION: See CRAFTSMAN Hand Tool Full Unlimited Warranty above.
9 GT 46402N—Shipping weight 263 poundsSet \$1899.00

CRAFTSMAN HAND TOOL FULL UNLIMITED WARRANTY: If any CRAFTSMAN Hand Tool ever fails to give complete satisfaction, return it to the nearest Sears store throughout the United States, and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



805-Pc. Set at left plus 12-Drawer Chest (1) and 12-Drawer Cabinet (2)

Sep. prices \$2168.98
tot. \$3025.95

For full description, see chest (11) and cabinet (12) on page 139.

ORDERING INFORMATION: See warranty above.

Shipping weight 487 pounds.
9 GT 43401N3.....\$2168.98



805-Pc. Set at left plus 12-Drawer Chest (1), 12-Drawer Cabinet (2), Mobile Tool Cart (3)

Sep. prices \$2358.97
tot. \$3215.94

For full description, see chest (11), cabinet (12), page 139. See mobile tool cart on page 137.

ORDER INFO: See warranty above.

Shipping weight 606 lbs.
9 GT 43402N5.....\$2358.97



DIGITORK™ Torque Wrench

\$49.97
3/4-inch

With today's modern machinery, which uses many new and different kinds of light alloys, torquing of nuts, bolts and screws becomes a critical operation. You'll find that you need a wrench that is not only accurate, but simplified in use, too. Our DIGITORK™ torque wrench offers both of these features. Digital calibrations in a highly visible standard and metric scale eliminate the need for complicated computations. Accuracy to 3% in both directions greatly reduces the chances of torquing errors that could result in leaks or damage to expensive parts. The DIGITORK™ wrench is still the finest we sell.

More accurate, easier to read, stays calibrated longer than our other torque wrenches.

CONST: Chrome-plated steel. Ball bearings reduce friction among internal components. . . . increase accuracy. Quick release, reversible ratchet head. Digital readouts recessed in contoured plastic handle. Clicks when pre-set torque is reached. Case included.

TORQUE RANGE: ±3% accuracy in both directions. Calibrated in English (foot-pounds) and Metric (Newton-meters, Nm) scales. 1/2-inch square drive measures from 10 to 150 ft.-lbs. (1-ft. lb. increments) and 10 to 200 Nm (2-Nm increments). 3/4-inch square drive measures from 5 to 75 ft.-lbs. (5-ft.-lb. increments) and from 5 to 100 Nm (1-Nm increments).

ORDERING INFORMATION: All torque wrenches require recalibration periodically. See warranty information below.

1/2-inch Square Drive. Shpg. wt. 3 lbs. 7 oz. 9 GT 44465 \$54.97
3/4-inch Square Drive. Shpg. wt. 2 lbs. 7 oz. 9 GT 44466 \$49.97

FULL 90 DAY WARRANTY ON CRAFTSMAN DIGITORK™ WRENCH. If within 90 days from the date of purchase, this CRAFTSMAN DIGITORK™ Wrench fails due to a defect in material or workmanship, Sears will repair and/or recalibrate it free of charge.

LIMITED WARRANTY: After 90 days and until one year from the date of purchase, Sears will repair any defect in the material or workmanship in the torque wrench, free of charge. This warranty coverage does not include recalibration. Warranty service is available by simply returning the wrench to the nearest Sears store throughout the U.S. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CRAFTSMAN® Torque Wrenches

(1) Micro-adjusting Wrench lets you pre-set torque

Measures 10 to 150 ft.-lbs. or 20.3 to 210.1 Newton-meters

FULL 90 DAY WARRANTY ON CRAFTSMAN MICRO-ADJUSTING TORQUE WRENCH: If, within 90 days from the date of purchase, this Craftsman Micro-adjusting Torque Wrench fails due to a defect in material or workmanship, Sears will repair and/or recalibrate it, free of charge.

LIMITED WARRANTY: After 90 days and until one year from date of purchase, Sears will repair any defect in the material or workmanship in the torque wrench, free of charge. This warranty coverage does not include recalibration. Warranty service is available by simply returning the wrench to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTRUCTION: Chrome-plated steel, texture grip handle. Reversible ratchet. Push-button release. Patented snap-lock holds setting. Sealed mechanism. No gauges. Clicks when pre-set torque is reached. **TORQUE RANGE, ORDERING INFORMATION:** All torque wrenches require recalibration periodically. See warranty above.

1/2-inch Sq. Dr. 10 to 150 ft.-lbs. or 20.3 to 210.1 Newton-meters. 9 GT 44443—Shipping weight 3 lbs. 11 oz. \$49.97

3/8-inch Sq. Drive: 5 to 75 ft.-lbs. or 10.2 to 105.1 Newton-meters. 9 GT 44439—Shipping weight 2 lbs. 11 oz. \$44.97

Polyethylene case for 1/2-inch Square Drive wrench (not shown). 9 GT 44467—Shipping weight 1 lb. 1 oz. \$4.97

Polyethylene case for 3/8-inch Square Drive wrench (not shown). 9 GT 44468—Shipping weight 1 lb. \$4.67

(2) Heavy-duty Wrench with direct-reading dial

Measures 0 to 250 ft.-lbs. or 0 to 350 Newton-meters

FULL ONE YEAR WARRANTY ON CRAFTSMAN DIAL INDICATING TORQUE WRENCH. If, within one year from the date of purchase, this CRAFTSMAN Dial Indicating Torque Wrench fails due to a defect in material or workmanship, Sears will repair and/or recalibrate it, free of charge. Warranty service is available by simply returning the torque wrench to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTR: Nickel chrome plated steel. 1/2-in. square drive for industrial applications. Direct-reading dial shows measurement in either direction. 2 1/2-in. dial has plastic lens. Precision-gear meter movement. **TORQUE RANGE:** Measures from 0 to 250 ft.-lbs. or 0 to 350 Newton-meters in both directions. Memory pointer shows highest torque reached until reset to zero.

ORDER INFO: All torque wrenches require recalibration periodically. 9 GT 44645—Shipping weight 3 lbs. 12 oz. \$54.97

(3) Wrench with direct-reading dial

Measures 0 to 600 in.-lbs. or 0 to 700 Deci-Newton-meters

FULL ONE YEAR WARRANTY ON CRAFTSMAN DIAL INDICATING TORQUE WRENCH. If, within one year from the date of purchase, this CRAFTSMAN Dial Indicating Torque Wrench fails due to a defect in material or workmanship, Sears will repair and/or recalibrate it, free of charge. Warranty service is available by simply returning the torque wrench to the nearest Sears store throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTR: Chrome-plated steel. 3/8-inch square drive. Direct-reading dial shows measurement in either direction. 2 1/2-inch dial has plastic lens. Precision-gear meter movement. Memory pointer shows highest torque reached until reset to zero.

TORQUE RANGES, ORDERING INFORMATION: All torque wrenches require recalibration periodically.

0 to 600 in.-lbs. or 0 to 700 Deci-Newton-meters. 9 GT 44646—Shipping weight 2 lbs. \$49.97

0 to 250 in.-lbs. or 0 to 280 Deci-Newton-meters. 9 GT 44647—Shipping weight 1 lb. 12 oz. \$44.97

(4) Beam-type Wrenches in three torque ranges

Measures 0 to 600 in.-lbs. or 0 to 70 Newton-meters

FULL ONE YEAR WARRANTY ON CRAFTSMAN BEAM STYLE TORQUE WRENCH. If this Craftsman Beam Style Torque Wrench fails to give complete satisfaction within one year from the date of purchase, return it to the nearest Sears store throughout the U.S. and Sears will replace it, free of charge. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CONSTR: Chrome-plated steel with nylon handle that pivots for best work angle. Square drive. Measures in both directions.

TORQUE RANGES, ORDER INFO: All torque wrenches require recalibration periodically. See warranty above.

3/8-inch Sq. Drive: 0 to 50 ft. lbs. or 0 to 70 Newton-meters. 9 GT 44644—Shipping weight 1 lb. 9 oz. \$13.97

1/2-inch Sq. Drive: 0 to 100 ft. lbs. or 0 to 140 Newton-meters. 9 GT 44483—Shipping weight 2 lbs. 2 oz. \$15.97

1/2-inch Sq. Drive: 0 to 150 ft. lbs. or 0 to 200 Newton-meters. 9 GT 44642—Shipping weight 2 lbs. 2 oz. \$17.97

No gauges, easy to use in blind spots or on vibrating machinery

\$49.97
1

2

\$54.97

\$49.97

3

4

Beam-type dial reads with a quick glance
\$13.97
3/8-in. drive

Sears * Best

These CRAFTSMAN® Tool Boxes have full-length hinges with staked pins for strength and security... heavy-gauge steel construction for supporting heavy tool loads



(1) Carpenter's Box
For tools up to 29 inches; partitioned tray.
SIZE: 30x8 1/2 x 9 1/2 in. high. Tray 29 1/4 x 7 1/4 x 1 1/2 in. deep.
CONSTRUCTION: Heavy-gauge steel. Gray baked enamel box, red tray. Reinforced corners. Plastisol-coated steel top handle, steel side handles. Knock-out plug for square, clip for 2 hand saws. Full-length hinge. Three drawbolt latches... center one locks; 2 keys.
ORDER INFO: Shpg. wt. 19 lbs. 9 GT 6517C.....\$27.75

(2) Box for 1/4-in. drive tools
For tools up to 20 in. long.
SIZE: 20 1/2 x 6 x 3 1/4 in. high.
CONSTRUCTION: Heavy-gauge steel. Gray baked enamel finish. Nickel-plated steel front handle. Two drawbolt latches.
ORDER INFO: Shpg. wt. 7 lbs. 9 GT 6506.....\$10.99



Brass Padlock
\$2.59
1-inch
CONSTR: Solid brass case. Chrome-plated steel. Case hardened, double-locking shackle. 4-pin tumbler. 2 keys. Imported.
CASE WIDTH. ORDER INFO:
1-inch. 3/4-in. clearance. Fit padlock eye latches. Shipping weight 5 oz. 9 GT 58421.....\$2.59
1 1/4-inch. 1 1/8-inch clearance. Fit combination drawbolts. Shipping weight 6 oz. 9 GT 58422.....\$2.99



(3) Hip-roof Tool Box
For tools up to 19 inches long; partitioned tray.
SIZE: Overall, box measures 19 3/4 x 7 x 8 inches high. Tray measures 19 x 6 1/2 x 2 1/4 inches deep.
CONSTRUCTION: Heavy-gauge steel. Gray baked enamel finish box, red tray. Polyethylene handle. Full-length hinge. Two drawbolt latches, padlock eye.
ORDERING INFO: Shpg. wt. 9 lbs. 8 oz. 9 GT 6520.....\$13.99

Compact Box. As (3), but box measures 19 3/4 x 6 x 6 in. Tray 19 x 5 3/4 x 1 1/4 in. deep. Combination drawbolt latch.
ORDERING INFO: Shpg. wt. 7 lbs. 8 oz. 9 GT 65161.....\$9.99



(4) Single-cover Cantilever Tool Box
For tools up to 16 in. long; 4 trays.
SIZE: 16 1/2 x 8 7/8 x 10 1/4 in. high. 4 trays each 15 1/2 x 3 3/4 x 1 1/4 in. deep.
CONSTR: Hip-roof design. Heavy-gauge steel. Gray enameled box, red trays. 2 trays partitioned. Polyethylene handle. Full-length hinge. Combination drawbolt with padlock eye.
ORDERING INFORMATION: 9 GT 65351—Wt. 12 lbs.\$22.99

(5) Double-cover Cantilever Tool Box
For tools up to 17 in. long; 4 trays.
SIZE: 18 x 10 x 13 1/4 in. high. 4 trays each 15 1/2 x 3 3/4 x 1 1/4 in. deep.
CONSTRUCTION: Hip-roof design. Heavy-gauge steel. Gray baked enamel finish box, red trays. 2 trays partitioned, 2 with covers. Plastisol-coated steel handle. Full-length hinges. 2 drawbolt latches, padlock eye.
ORDERING INFO: Shpg. wt. 24 lbs. 9 GT 6536C.....\$34.75



Locking Styrene Tool Box with lift-out tray. 2 cantilevered drawers
\$13.99
SIZE: 14 x 11 x 9 1/2 inches deep. Tote tray measures 13 1/4 x 5 3/4 x 1 1/4 inches deep.
CONSTRUCTION: Molded high-impact styrene body won't rust. 3 cantilevered trays with various compartment sizes. Lift-out tray. Split-cover, twin-grip handles. 2 snap locks, 1 metal key lock, 2 keys.
ORDERING INFORMATION: Not Craftsman. Shipping weight 6 pounds 8 ounces. 9 GT 6508.....\$13.99



Our best Flat-top Mechanics' Tool Box (7) above holds tools 23 in. long
\$32.75

(6) Mechanics' Flat-top Tool Box
For tools up to 19 in. long; partitioned tote tray.
SIZE: 20 x 8 1/2 x 9 1/2 in. high. Tray 19 1/4 x 7 1/4 x 2 in. deep.
CONSTRUCTION: Heavy-gauge steel. Gray enamel finish box and tray. Polyethylene handle. Full-length hinge. 2 drawbolt latches, welded center hasp, padlock eye.
ORDERING INFORMATION: 9 GT 6512—Shipping weight 12 lbs. 8 oz.\$16.75
As (6), except takes tools up to 17 inches long. 18 x 8 x 9 in. high. Tray measures 17 1/4 x 6 3/4 x 1 3/4 in. deep. 9 GT 6500—Shpg. wt. 10 lbs. 8 oz.\$14.99

As (6) except takes tools up to 16 inches long. 17 x 7 x 7 1/2 inches high. Non-partitioned tray measures 16 1/4 x 6 x 1 3/4 inches deep. Combination drawbolt with padlock eye.
9 GT 65013—Shpg. wt. 7 lbs.\$10.99
(7) Our best Flat-top Mechanics' Tool Box
For tools up to 23 inches long; partitioned tray.
SIZE: 24 1/4 x 9 1/2 x 9 1/2 in. high. Tray 23 1/4 x 8 3/4 x 2 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel. Red baked enamel finish. Plastisol-coated steel top handle, steel side handles. Full-length hinge. 3 drawbolt latches... center one with lock and 2 keys.
ORDERING INFORMATION: 9 GT 65141C—Shipping weight 21 pounds....\$32.75

(8) Attache Tool Case
Perfect for travelers, technicians, tradesmen. Durable, compact case is capable of carrying a full complement of common tools (not incl.) yet fits neatly into areas where space is limited. Slim design, comfortable padded handle for easy carrying.
SIZE: 18 1/4 x 13 x 5 3/4 inches deep.
CONSTRUCTION: Black, pebble-grain, thermo-plastic shell with fiber glass reinforced corners for strength. Two removable tool pallets hold assortment of common tools such as pliers, screwdrivers, wrenches and nut drivers. Dividers for separating larger tools in bottom. Full-length pocket in lid holds miscellaneous items. Heavy-duty, extruded aluminum valance. Rugged, surface-type steel locks with 2 keys. Padded, steel-core handle.
ORDERING INFORMATION: Shipping weight 10 pounds 13 ounces. C9 GT 65091.....\$69.99



New at Sears... Compact, easy to carry Attache Tool Case
\$69.99

CRAFTSMAN® Tool Chests with reinforced bottom and sides



(9) Competition Chest
SIZE: 20 1/4 x 8 1/2 x 10 5/8 in. high. 2 drawers, each: 18 1/4 x 7 1/2 x 2 3/4 in. deep. Top compartment 3 1/4 in. deep. Cantilever tray 19 1/4 x 3 1/2 x 1 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel. Baked black wrinkle finish, red tray. Wood-grained vinyl on drawers, top. Polyethylene handle. Full-length hinge. Drawers lock. 2 drawbolt latches, tumbler lock, 2 keys.
ORDERING INFO: Shpg. wt. 19 lbs. 9 GT 6530C.....\$29.99



(10) With two drawers
SIZE: 20 x 8 1/2 x 9 1/2 in. deep. 2 drawers, 17 3/4 x 7 1/4 x 2 3/4 in. deep. Top compartment 2 3/4 in. deep.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. 2 drawbolt latches and padlock hasp.
ORDERING INFO: Wt. 17 lbs. 9 GT 65334C.....\$26.99



(11) With two drawers, tray
SIZE: 20 x 8 1/2 x 9 1/2 in. deep. 2 drawers, each: 17 3/4 x 7 1/4 x 2 in. deep. Tote tray 18 1/2 x 6 3/4 x 1 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel. Gray, red baked enamel finish. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. 2 drawbolt latches, tumbler lock, 2 keys.
ORDERING INFO: Wt. 20 lbs. 9 GT 65336C.....\$34.75



(12) Our largest CRAFTSMAN® Tool Box
Heavy-duty maintenance equipment box... over 4-cu. ft. of space
Box takes tools and equipment up to 39 in. long.
SIZE: 40 1/4 x 16 1/2 x 12 1/8 inches high. Tray measures 20 x 8 1/2 x 9 1/2 inches deep.
CONSTR: Heavy-gauge steel, gray baked enamel finish. Heavy-duty bolted steel side handles; 3 butt hinges. Steel chain stops. Padlock hasp and eye.
ORDER INFO: See "N" suffix on page 69. 9 GT 65242N—Shpg. wt. 64 lbs.\$89.99



CRAFTSMAN® Machinists' Chests and Cabinets

- Cabinets have extra-thick corner posts
- Felt inserts in most chest drawers

CONSTRUCTION: Heavy-gauge steel with brown wrinkle finish. Side handles. Tumbler lock and 2 keys. Full-length drawer slides keep drawers in alignment even when full of tools. Cabinets have wide, full-length flanges on front corners, welded to give 20% more strength than mechanics' cabinets. Full-length drawer pulls on cabinets allow for easier grasping. Four 5-inch casters enable cabinets to roll smoothly... set toe brake to keep stationary. Chests have cap-end construction for added strength. Front panel covers chest drawers... top has full-length hinge staked for added security.



8-drawer Chest
\$74.99

2-drawer Chest
\$47.99

7-drawer Cabinet
\$189.99



Cabinets have wide, full-length flanges welded to give them 20% more strength than mechanics' cabinets



6-drawer Chest
\$114.99

4-drawer Cabinet
\$159.99



11-drawer Chest
\$89.99



2-drawer Chest
\$44.99



5-drawer Porta-Box
\$39.99

(1) **8-drawer Chest.** All drawers except top-center lined with nylon-felt protective inserts. See other construction features above. DIMENSIONS: 27 1/8 x 8 1/2 x 13 1/2 in. high. Drawers 7 1/4 in. front to back; top, center 5 1/4 x 3 1/4 in. deep; 4 side 8 1/2 x 1 in. deep; 1 side 8 1/2 x 2 in. deep; 2 bottom 2 1/2 in. wide; one 1 3/8 in. deep, other 2 1/4 in. deep. ORDERING INFORMATION: Shipping weight 40 pounds. 9 GT 65228L.....\$74.99

(2) **2-drawer Chest.** No drawer-covering panel. See other construction features at top of page. DIMENSIONS: 28 x 9 3/4 x 7 3/4 in. high. Drawers 9 3/8 in. front to back, 2 1/2 in. wide; one 1 3/4 in. deep, one 3 7/8 in. deep. ORDERING INFORMATION: Shipping weight 24 pounds. 9 GT 65322C.....\$47.99

(3) **7-drawer Cabinet.** See construction information above. DIMENSIONS: 29 x 18 x 35 3/8 in. high. Drawers 16 3/4 in. front to back, 22 1/4 in. wide; two 1 7/16 in. deep, three 3 1/8 in. deep, one 4 1/4 in. deep, one 6 3/8 in. deep. ORDERING INFORMATION: Shipping weight 132 pounds. 9 GT 65324N.....\$189.99

2-Chest and Cabinet Set. Includes (1), (2), (3) above. 9 GT 65301N3—Sep. prices tot. \$310.97. Wt. 196 lbs. .Set \$279.97

(4) **6-drawer Chest.** Combination lid/cover panel. Full-length drawer pulls. See additional construction features above. DIMENSIONS: 26 x 12 x 14 7/8 in. high. Drawers 10 3/4 in. front to back. Five 1 7/8 in. deep; one 4 1/2 in. wide, two 7 7/8 in. wide, two 22 1/2 in. wide. One drawer is 2 7/8 in. deep, 22 1/2 in. wide. Removable tote tray 18 1/2 x 7 1/2 x 1 1/2 in. deep. ORDERING INFO: Shpg. wt. 56 lbs. 9 GT 65325L.....\$114.99

(5) **4-drawer Cabinet.** See construction information, top of page. DIMENSIONS: 29 x 18 x 35 3/8 in. high. 4 drawers 16 3/4 in. front to back, 22 1/4 in. wide; one 3 1/8 in. deep, one 6 7/16 in. deep, two 1 1/2 in. deep. Lower compartment measures 28 1/2 x 17 1/8 x 12 1/2 in. deep. Cover panel slides into cabinet. ORDER INFO: Wt. 111 lbs. 9 GT 65323N.....\$159.99

Chest and Cabinet Set Includes 6-drawer Chest (4) and 4-drawer Cabinet (5) above. ORDERING INFORMATION: Separate prices total \$274.98. Shipping weight 167 pounds. 9 GT 65302N2.....Set \$249.98

(6) **11-drawer Chest.** Top handle. Spring, drawer retainer. 9 dividers. Drawers rayon/wool felt lined. Other construction information above. DIMENSIONS: 26 5/8 x 8 1/2 x 17 1/2 in. high. Drawers 7 1/2 in. front to back; six 8 5/8 x 1 in. deep, one 5 1/2 x 4 1/8 in. deep, one 8 5/8 x 2 in. deep, one 24 5/8 x 1 1/2 in. deep, one 24 5/8 x 2 3/8 in. deep, one 24 5/8 x 3 in. deep. ORDERING INFORMATION: Shipping weight 53 lbs. 9 GT 65074L.....\$89.99

(7) **7-drawer Chest.** Top handle. Nylon felt drawer inserts. See additional constr. features above. DIMENSIONS: 20 5/8 x 8 1/2 x 13 1/2 in. high. Drawers 7 1/4 in. front to back; four 8 1/2 in. wide, 1 in. deep, one 8 1/2 in. wide, 2 in. deep, one 18 1/8 in. wide, 1 3/8 in. deep, one 18 1/8 in. wide, 2 1/4 in. deep. ORDERING INFORMATION: Shipping weight 32 lbs. 9 GT 65227C.....\$59.99

(8) **2-drawer Chest.** See construction info above. DIMENSIONS: 21 5/8 x 9 3/4 x 7 3/4 in. high. Drawers 9 3/8 in. front to back, 17 5/8 in. wide; one 1 3/4 in. deep and one 3 7/8 in. deep. ORDERING INFORMATION: Shipping weight 20 lbs. 9 GT 65321C.....\$44.99

(9) **5-drawer Porta-Box.** Top handle. Spring, drawer retainers. Rayon/wool felt-lined drawers. See additional construction information above. DIMENSIONS: 13 1/4 x 8 1/2 x 10 1/4 in. high. Drawers 7 1/4 in. front to back, 9 in. wide; three 1 in. deep, one 2 3/8 in. deep, one 1 3/4 in. deep. 9 GT 65073C—Shpg. wt. 15 lbs.\$39.99



20-inch Chest
\$139.99



26-inch Chest
\$189.99

(10 and 11) CRAFTSMAN® hardwood Machinists' Chests

Handcrafted of solid oak and poplar for the master journeyman

CONST: Chest, drawer fronts handcrafted from cabinet-quality, kiln-dried oak 1/2 in. thick, hand-rubbed with 2 coats of varnish to high-luster protective finish. Drawers tongue, groove constructed, hand-fitted to slide smoothly. Drawers have sides of poplar, bottoms of steel and lined with wool/cotton felt. Removable front cover can be used as tray or slid under bottom drawer. Hardware on (10) of lacquered, black-plated steel. Hardware on (11) of nickel-plated steel. Lock, 2 keys.

(10) **8-drawer, 20-in. Chest.** Black, leather-look, vinyl side, top, front panels. DIMENSIONS: 20 x 9 1/2 x 15 1/4 in. high. Drawers 7 1/4 in. front to back. Center drawer 5 1/2 x 3 1/8 in. deep. 4 drawers 5 1/8 in. wide, 1 3/8 in. deep. 3 drawers 18 1/8 in. wide; one 1 1/8 in. deep, one 1 3/8 in. deep, one 2 1/8 in. deep. Top compartment 18 7/8 x 8 1/4 x 3 1/4 in. deep. ORDER INFO: Shpg. wt. 28 lbs. C9 GT 6510C.....\$139.99

(11) **8-drawer, 26-in. Chest.** DIMENSIONS: 26 x 9 1/2 x 15 1/4 in. high. Drawers 7 1/4 inches front to back. Center 5 1/2 x 3 1/8 inches deep. Four 8 1/2 inches wide, 1 3/8 inches deep. Three 24 1/8 inches wide; one 1 1/8 inches deep, one 1 3/8 inches deep, one 2 1/8 inches deep. Top compartment 24 7/8 x 8 1/4 x 3 1/4 in. deep. ORDERING INFORMATION: Shpg. wt. 38 lbs. C9 GT 6511C.....\$189.99



Even our lowest priced Mechanics' Chests and Cabinets have a combined total of 14.2 square feet for tool storage

6-drawer Chest 6.5 sq. ft. for storage
3-drawer Cabinet 7.7 sq. ft. for storage
\$72.99 **\$87.99**

(1) 6-drawer Chest

CONSTR.: Heavy-gauge steel with blue-gray hammerloid finish. Nickel-plated side handles, drawer pulls. Tumbler lock. 2 keys help deter unauthorized use. Full-length hinge. Removable, partitioned tote tray.

OVERALL SIZE: 26 $\frac{1}{2}$ x12 $\frac{1}{2}$ x15 in. high. DRAWERS: 10 $\frac{3}{4}$ inches front to back. 1 drawer 4 $\frac{1}{2}$ inches wide, 1 $\frac{1}{8}$ inches deep; 2 drawers 7 $\frac{3}{8}$ inches wide, 1 $\frac{1}{8}$ inches deep; 2 drawers 22 $\frac{1}{2}$ inches wide, 1 $\frac{1}{8}$ in. deep; 1 drawer 22 $\frac{1}{2}$ in. wide, 2 $\frac{3}{8}$ in. deep. Tote tray 18 $\frac{1}{2}$ x7 $\frac{1}{4}$ x1 $\frac{1}{2}$ in. deep.

ORDERING INFO: Not Craftsman. See "N" suffix, pg. 69. Shpg. wt. 58 lbs. 9 GT 65195N.....\$72.99

(2) 3-drawer Cabinet

CONSTRUCTION: Heavy-gauge steel with blue-gray hammerloid finish. Nickel-plated side handle and drawer pulls. Tumbler lock with two keys helps deter unauthorized use. Closing front panel slides into cabinet. 3-inch diameter casters for mobility.

OVERALL SIZE: 26 $\frac{1}{2}$ x18x32 $\frac{1}{4}$ in. high. DRAWERS: All drawers are 16 $\frac{3}{4}$ inches front to back. Two drawers measure 22 $\frac{1}{4}$ inches wide and 3 $\frac{1}{8}$ inches deep, one drawer measures 22 $\frac{1}{4}$ in. wide and 6 $\frac{1}{8}$ in. deep. Lower storage compartment 23 $\frac{1}{2}$ x17 $\frac{1}{2}$ x12 $\frac{1}{2}$ in. deep.

ORDERING INFO: Not Craftsman. 9 GT 65194N—Wt. 94 lbs.\$87.99

New at Sears . . . Home Hardware Shop

You get a 25-drawer organizer, over 1800 assorted fasteners

End "one-piece-at-a-time" trips to the hardware store. Shop includes over 1800 fasteners so you'll be ready for those household repairs. Keep them organized in 25-drawer, 51-bin cabinet for quick access.

CABINET: Blue steel cabinet measures 11 $\frac{7}{8}$ x6 $\frac{3}{8}$ x9 $\frac{3}{8}$ inches high. 25 clear plastic drawers each measure 2 $\frac{1}{8}$ x5 $\frac{3}{8}$ x1 $\frac{1}{4}$ in. deep. 26 drawer dividers. Self-adhesive identification labels are color coded.

FASTENERS: All fasteners zinc-plated steel. Includes 168 assorted No. 4, 6, 8 and 10 wood screws with lengths from $\frac{3}{8}$ to 1 $\frac{1}{2}$ inches; 168 assorted No. 6, 8 and 10 sheet metal screws with lengths from $\frac{3}{8}$ to 1 $\frac{1}{2}$ inches; 68 assorted $\frac{5}{16}$ x18 and $\frac{1}{4}$ x20 machine bolts with lengths from $\frac{3}{4}$ to 1 $\frac{1}{2}$ inches; 312 assorted No. 10x24, 8x32 and 6x32 machine screws with lengths from $\frac{3}{8}$ to 1 inch; 274 assorted nuts in 5 sizes from $\frac{5}{32}$ to $\frac{5}{16}$ x18; 92 assorted cotter pins in 4 sizes from $\frac{1}{16}$ x $\frac{3}{4}$ to $\frac{1}{8}$ x2; assorted washers in sizes 6, 8, 10, $\frac{1}{16}$; 260 flat, 260 split and 260 tooth.

ORDERING INFORMATION: Shipping weight 13 pounds 2 ounces. 9 GT 7126.....\$22.99

Organizer alone. As described above but fasteners not included.

9 GT 71262—Shipping weight 6 pounds\$9.99

Fasteners alone. As described above but cabinet not included.

9 GT 71263—Shipping weight 7 pounds 5 ounces\$17.99

Organize tools with CRAFTSMAN® Chest and Cabinet Accessories



See the next 2 pages for selection of Craftsman Mechanics' Chests and Cabinets

(3) Mat for Cabinet Top

Black, embossed vinyl. 17 $\frac{3}{4}$ x26 $\frac{1}{4}$ in. ORDERING INFO: Wt. 1 lb. 7 oz. 9 GT 65221.....\$5.19

(4) Drawer Liner

Cork rubber $\frac{1}{32}$ inches thick. Cutting instructions included.

ORDERING INFORMATION: For chests. 22 $\frac{1}{4}$ x21 $\frac{1}{2}$ in. long. 9 GT 65217—Wt. 9 oz.\$5.19 For cabinets. 16 $\frac{1}{2}$ x69 in. long. 9 GT 65218—Wt. 1 lb. 3 oz.\$5.39

(5) Socket Organizer

CONSTRUCTION: Steel organizer fits in cabinet drawers. Provides space for U-joints, adaptors, extensions, ratchet and flex handles. Holds 96 sockets. Cut-outs for $\frac{1}{4}$ -in. sq. dr. (12-pt.), $\frac{3}{8}$ -in. sq. dr. (6, 8, 12-pt.), $\frac{1}{2}$ -in. sq. dr. (6, 12-pt.) in standard and metric sizes.

DIMEN: 22 $\frac{1}{4}$ x16 $\frac{1}{8}$ x1 in. overall. ORDERING INFO: Wt. 5 lbs. 9 GT 65204C.....\$10.79

(6) Parts Tray. Polystyrene. Measures 7 $\frac{1}{4}$ x13 $\frac{1}{4}$ x12 $\frac{3}{4}$ inches long.

ORDERING INFO: Wt. 12 oz. 9 GT 65211.....\$2.15

(7) Drawer Dividers. Extruded aluminum. Spring-load for installation ease.

ORDERING INFO: Package of 4. For chests. 1 $\frac{1}{8}$ x10 $\frac{1}{2}$ x $\frac{1}{2}$ in. long. 9 GT 74223—Wt. 1 lb.Pkg. \$3.25 For cabinets. 16 $\frac{1}{2}$ in. long. 2 ea. 1 $\frac{1}{8}$ and 2 $\frac{3}{8}$ in. high. Wt. 2 lbs. 2 oz. 9 GT 74291.....Pkg. \$3.75

(8) Security Lock and Chain. Secures cabinet to wall or other permanent fixture.

CONSTRUCTION: 9-in. long steel chain. Steel anchor box, wood screws, lag bolts. Lock and 2 keys.

ORDERING INFO: Shpg. wt. 2 lbs. 9 GT 65116.....\$19.99

(9) Tool Rack. Steel, red enamel. 17 $\frac{3}{16}$ in. long. Hangs on cabinet for easy tool access.

ORDERING INFO: Wt. 1 lb. 7 oz. 9 GT 65216.....\$3.29

(10) CRAFTSMAN Hang-on Cabinet

Mounts on any Craftsman mechanics' cabinet or bolts to any flat surface (bolts not included). CONSTR: Heavy-gauge steel with red enamel finish. Full-length piano-type hinge. Tumbler lock with 2 keys for security. SIZE: 17 $\frac{3}{8}$ x10 $\frac{3}{8}$ x29 $\frac{1}{4}$ in. SHELVES: Two steel shelves adjustable at 2-inch increments. Mount flat surface up or turned over with $\frac{1}{2}$ -in. lip on top.

ORDER INFO: "N" suffix, p. 69. Shipping weight 32 lbs. 9 GT 65245N.....\$59.99

(11) 6-drawer Tool Caddy

Provides extra storage space for tools. Fits on either side of Craftsman mechanics' cabinets.

CONSTR: Steel with red and gray enamel finish. Full-length drawer pulls. 1-piece, compound action drawer slides stay in alignment. Lock, 2 keys.

OVERALL SIZE: 12x9 $\frac{1}{2}$ x14 $\frac{1}{2}$ in. DRAWERS: Six drawers each measure 10 $\frac{3}{8}$ x7 $\frac{1}{8}$ x1 $\frac{1}{8}$ in. deep. ORDERING INFO: Wt. 28 lbs. 9 GT 65205C.....\$49.99

(12) Folding Side Shelf. Attaches to side or back of Craftsman mechanics' cabinets.

CONSTR: Steel with red enamel finish. Holds up to 70 lbs. Collapsible. Includes braces. 17 $\frac{3}{8}$ x15 $\frac{1}{8}$ x14 in. high, $\frac{3}{8}$ -in. edge. ORDERING INFORMATION: Shipping weight 10 lbs. 9 GT 65213.....\$17.79

(13) 4-drawer Add-on Chest. Fits between all Craftsman mechanics' chests and cabinets except under 9-65259.

CONSTRUCTION: Steel with red and gray enamel finish. Full-length drawer pulls. One-piece, compound-action drawer slides help drawers operate smoothly and stay in alignment even when full of tools. Tumbler lock with 2 keys for added security.

OVERALL SIZE: 26 $\frac{1}{2}$ x12 $\frac{1}{2}$ x10 $\frac{1}{2}$ in. high. DRAWERS: Four drawers each measure 11x2 $\frac{1}{4}$ x22 $\frac{3}{8}$ inches wide.

ORDERING INFORMATION: Shipping weight 34 pounds. 9 GT 65225C.....\$63.99

(14) 6-drawer CRAFTSMAN Tool Cart. Carries heavy loads up to 1000 pounds. Holds any Craftsman mechanics' cabinet except 10-drawer model 9-65041N.

CONSTRUCTION: Heavy-gauge steel with red enamel finish. Chrome-plated crossbar handle. Drawer slides for smooth operation. Two 10-inch, steel-rimmed ball-bearing wheels with rubber tires. Two 5-inch swivel casters with toe brakes. Wheels can be mounted as shown or at each corner. Tumbler lock and 2 keys for drawers.

OVERALL SIZE: 43 $\frac{1}{8}$ x20 $\frac{3}{8}$ x35 in. high. Platform for cabinet measures 20x29 in.

DRAWERS: 12 $\frac{1}{8}$ x16 in. front to back, 16 $\frac{3}{8}$ in. wide; one 1 $\frac{1}{8}$ in. deep, four 3 $\frac{1}{8}$ in. deep and one 5 $\frac{1}{8}$ in. deep.

ORDERING INFORMATION: Shipping weight 144 pounds. 9 GT 65206N2.....\$199.99

2-drawer Tool Cart (not shown). Carries heavy loads up to 1000 pounds. Holds any Craftsman mechanics' cabinet except 10-drawer model 9-65041N.

CONSTRUCTION: Same as cart (14) above. OVERALL SIZE: 43 $\frac{1}{8}$ x20 $\frac{3}{8}$ x35 in. high. Platform measures 20x29 inches.

DRAWERS: Two drawers each 12 $\frac{1}{8}$ x16 $\frac{3}{8}$ x3 $\frac{3}{4}$ inches deep. Lower compartment measures 12 $\frac{1}{8}$ x20 $\frac{3}{8}$ x16 in. high. Front panel slides into cabinet.


ORDERING INFO: Shpg. wt. 119 lbs. 9 GT 65214N2.....\$189.99





The closer you look the more reasons you'll find for

All CRAFTSMAN® Mechanics' Chests and Cabinets are constructed for STRENGTH you can depend on



Cabinets are equipped with two fixed, rear casters and two front, swivel casters. To keep stationary just set toe brakes on front casters.

Both chests and cabinets have recessed side handles (except 9GT65259N) to facilitate lifting and carrying. Tops and drawers lock with sturdy tumblers lock and two keys.

All drawers have attractive aluminum drawer pulls. Full-length design allows for easier grasping than with shorter styles . . . you can open, close drawers from sides as well as center.

One-piece, full-length drawer slides are compound-action so drawers stay aligned, open and close smoothly even when full of heavy tools.



Chest tops have flexible rods for hanging manuals, blueprints, instructions to keep them close at hand when you need them. Removable tote tray (except 9 GT 65251C) lets you take tools right to the job site. Chests also have rolled edges and embossed, cap-end construction for added strength and durability. Full-length, water-shed hinges are staked for security.



Sears Chests and Cabinets give you a choice of drawer combinations . . . pick the ones right for your needs

3-drawer Chest
5.0 square feet
for storage
\$89.99

2-drawer Cabinet
5.1 square feet
for storage
\$99.99

2-drawer Chest
2.7 square feet
for storage
\$69.99

3-drawer Cabinet
7.7 square feet
for storage
\$119.99

4-drawer Chest
6.5 square feet
for storage
\$94.99

5-drawer Cabinet
12.9 square feet
for storage
\$139.99

5-drawer Chest
6.5 square feet
for storage
\$99.99

8-drawer Cabinet
20.7 square feet
for storage
\$189.99

8-drawer Chest
8.8 square feet
for storage
\$119.99

6-drawer Cabinet
12.7 square feet
for storage
\$169.99

(1) 3-drawer Chest
CONSTR: Red and gray enamel finish. Other features, top of this and facing page.
OVERALL SIZE: Measures 26x12x14 $\frac{1}{4}$ in. high.
DRAWERS: Three drawers each 22 $\frac{1}{2}$ in. wide, 10 $\frac{3}{4}$ in. front to back; one 1 $\frac{7}{8}$ in. deep, one 2 $\frac{1}{16}$ in. deep and one 4 in. deep.
ORDERING INFO:
Shipping weight 46 lbs.
9 GT 65253L . . . \$89.99

(2) 2-drawer Cabinet
CONSTR: Red and gray enamel finish. Other features, top of this and facing page.
OVERALL SIZE: Measures 26 $\frac{1}{2}$ x18x29 inches high.
DRAWERS: Two drawers each 22 $\frac{1}{2}$ inches wide, 16 $\frac{3}{4}$ inches front to back; one 3 $\frac{1}{8}$ inches deep, one 6 $\frac{7}{16}$ inches deep. Storage compartment with retractable cover is 23 $\frac{7}{16}$ x17 $\frac{1}{2}$ x12 $\frac{1}{2}$ in. deep.
ORDERING INFO:
Shipping weight 81 lbs.
9 GT 65032N . . . \$99.99

(3) 2-drawer Chest
CONSTR: Red and gray enamel finish. Other features top of this and facing page.
OVERALL SIZE: Measures 26x10 $\frac{3}{4}$ x11 $\frac{1}{4}$ in. high.
DRAWER SIZES: 2 drawers each 22 $\frac{1}{2}$ inches wide, 8 $\frac{3}{4}$ inches front to back; one 2 $\frac{1}{16}$ inches deep and one 3 $\frac{1}{16}$ inches deep.
ORDERING INFO:
Shipping weight 32 lbs.
9 GT 65251C . . . \$69.99

(4) 3-drawer Cabinet
CONSTR: Red and gray enamel finish. Other features top of this and facing page.
OVERALL SIZE: Measures 26 $\frac{1}{2}$ x18x32 $\frac{1}{4}$ in. high.
DRAWERS: 3 drawers 22 $\frac{1}{4}$ in. wide, 16 $\frac{3}{4}$ in. front to back; two 3 $\frac{1}{8}$ in. deep, one 6 $\frac{7}{16}$ in. deep. Lower storage compartment with retractable cover measures 23 $\frac{1}{2}$ x17 $\frac{1}{2}$ x12 $\frac{1}{2}$ in. deep.
ORDERING INFO:
Shipping weight 89 lbs.
9 GT 65053N . . . \$119.99

(5) 4-drawer Chest
CONSTRUCTION: Red enamel chest and gray enamel drawers. See other features top of this and facing page.
OVERALL SIZE: Chest measures 26x12x14 $\frac{1}{8}$ in. high.
DRAWERS: 4 drawers each 22 $\frac{1}{2}$ in. wide, 10 $\frac{3}{4}$ in. front to back; three 1 $\frac{7}{8}$ in. deep, one 2 $\frac{7}{8}$ in. deep.
ORDERING INFO:
Shipping weight 49 lbs.
9 GT 65371L . . . \$94.99

(6) 5-drawer Cabinet
CONSTRUCTION: Red enamel cabinet and gray enamel drawers. See other features top of this and facing page.
OVERALL SIZE: Measures 26 $\frac{1}{2}$ x18x32 $\frac{1}{4}$ in. high.
DRAWERS: 5 drawers each 22 $\frac{1}{4}$ inches wide, 16 $\frac{3}{4}$ inches front to back; two 3 $\frac{1}{8}$ in. deep, one 4 $\frac{1}{4}$ in. deep and two 6 $\frac{7}{16}$ in. deep.
ORDERING INFO:
Shipping weight 104 lbs.
9 GT 65054N . . . \$139.99

(7) 5-drawer Chest
CONSTRUCTION: Red enamel chest, gray enamel drawers. See additional features at top of this and opposite page.
OVERALL SIZE: Chest measures 26x12x14 $\frac{1}{8}$ inches high.
DRAWERS: All drawers 10 $\frac{3}{4}$ inches front to back. Top, center 4 $\frac{3}{8}$ in. wide, 1 $\frac{7}{8}$ in. deep. 2 top, side 7 $\frac{7}{8}$ in. wide, 1 $\frac{7}{8}$ in. deep. Two bottom 22 $\frac{1}{2}$ in. wide; one 2 $\frac{1}{16}$ in. deep, one 3 $\frac{1}{16}$ in. deep.
ORDERING INFORMATION:
Shipping weight 54 pounds.
9 GT 65254L . . . \$99.99

(8) 8-drawer Cabinet
CONSTRUCTION: Red and gray enamel finish. See other features at top of this and facing page.
OVERALL SIZE: Cabinet measures 26 $\frac{1}{2}$ x18x40 $\frac{1}{16}$ inches high.
DRAWERS: 8 drawers 16 $\frac{3}{4}$ inches front to back, 22 $\frac{1}{4}$ inches wide; seven 3 $\frac{1}{8}$ inches deep, one 6 $\frac{7}{16}$ inches deep.
ORDERING INFORMATION:
Shipping weight 129 pounds.
9 GT 65247N . . . \$189.99

(9) 8-drawer Chest
CONSTR: Red and gray enamel finish. See other features top of this and opposite page.
OVERALL SIZE: Measures 26 $\frac{1}{2}$ x18x39 $\frac{3}{4}$ inches high.
DRAWERS: 10 $\frac{3}{4}$ in. front to back, 2 top center 4 $\frac{3}{8}$ in. wide, 1 $\frac{7}{8}$ in. deep. 4 top side 7 $\frac{7}{8}$ in. wide, 1 $\frac{7}{8}$ in. deep. 2 bottom 22 $\frac{1}{2}$ in. wide; one 1 $\frac{7}{8}$ in. deep, one 2 $\frac{7}{8}$ in. deep.
ORDERING INFO: Wt. 60 lbs.
9 GT 65255N . . . \$119.99

(10) 6-drawer Cabinet
CONSTR: Red and gray enamel finish. See other features top of this and opposite page.
OVERALL SIZE: Measures 26 $\frac{1}{2}$ x18x39 $\frac{3}{4}$ inches high.
DRAWERS: 16 $\frac{3}{4}$ in. front to back. Two 10 $\frac{3}{4}$ in. wide, 3 $\frac{1}{8}$ in. deep. Four 22 $\frac{1}{4}$ in. wide; three 3 $\frac{1}{8}$ in. deep, one 6 $\frac{7}{16}$ in. deep. Compartment. 23 $\frac{1}{2}$ x17 $\frac{1}{2}$ x12 $\frac{1}{2}$ in.
ORDERING INFO: Wt. 120 lbs.
9 GT 65056N . . . \$169.99
5-drawer Cabinet (not shown). As above but only 1 top drawer 22 $\frac{1}{4}$ in. wide, 3 $\frac{1}{8}$ in. deep.
ORDERING INFO: Wt. 125 lbs.
9 GT 65055N . . . \$159.99

buying CRAFTSMAN® Chests and Cabinets



Chests and cabinets are both made of heavy-gauge steel. For additional strength cabinets are I-frame constructed. Sears I-frames are based on one of the strongest structural shapes known. (The same basic principle is used in the I-beams which support buildings.) Because our I-frame is self-reinforcing, there's no need for cross bars. You get extra strength without sacrificing valuable storage space for tools.



Cabinet back panels are ribbon-embossed to minimize structural warping. Tests prove that our I-frame cabinets with ribbon embossing withstand 50% more diagonal stress than ordinary flat panel designs.



One-piece, cabinet tops and bottoms are cross-reinforced to withstand more weight than ordinary designs. This gives you greater load capacity without sag.

(11 and 12) Our most popular Chest and Cabinet

Buy both for large capacity storage needs. You'll get a total of 24 drawers with 31.7 square feet of storage space.

12-drawer Chest

9.5 square feet of storage space

\$149⁹⁹

12-drawer Cabinet

22.2 square feet of storage space

\$229⁹⁹

(11) 12-drawer Chest

CONSTR: Red enamel-finished chest and gray enamel-finished drawers. See other features top of this and opposite page.

OVERALL SIZE: Chest measures 26x12x19 inches high.

DRAWERS: 10 $\frac{3}{4}$ in. front to back, 6 top, side 7 $\frac{1}{4}$ inches wide, 1 $\frac{1}{2}$ inches deep, 3 top, center 4 $\frac{1}{2}$ inches wide, 1 $\frac{1}{8}$ inches deep, 3 bottom 22 $\frac{1}{2}$ inches wide: two 1 $\frac{1}{8}$ inches deep, one 2 $\frac{1}{4}$ inches deep.

ORDERING INFORMATION:

Shipping weight 73 pounds.

9 GT 65258N \$149.99

(12) 12-drawer Cabinet

CONSTRUCTION: Red enamel-finished cabinet, gray enamel-finished drawers. See other features top of this and opposite page.

OVERALL SIZE: 26 $\frac{1}{2}$ x18x38 $\frac{3}{4}$ in.

DRAWERS: 16 $\frac{3}{4}$ inches front to back, 4 top, side 7 $\frac{3}{8}$ inches wide, 2 inches deep. Locking top, center 4 $\frac{3}{4}$ inches wide, 4 $\frac{1}{16}$ inches deep. Seven 22 $\frac{1}{4}$ in. wide: one 2 $\frac{1}{16}$ in. deep, five 3 $\frac{1}{8}$ in. deep and one 6 $\frac{1}{16}$ in. deep.

ORDERING INFORMATION:

Shipping weight 151 pounds.

9 GT 65022N \$229.99



*Sears * Best*

(13 and 14) Our biggest Chest and Cabinet give you 50% more square feet of storage capacity than our best selling units

12-drawer Chest,
17 square feet for storage

\$249⁹⁹

10-drawer Cabinet,
31.5 square feet for storage

\$339⁹⁹

(13) 12-drawer Chest

CONSTR: Red enamel-finished chest, gray enamel-finished drawers. See other features top of this and opposite page.

OVERALL SIZE: 33 $\frac{1}{4}$ x15 $\frac{3}{4}$ x18 $\frac{3}{4}$ inches high.

DRAWERS: 14 $\frac{1}{4}$ inches front to back, 6 top, side 11 inches wide, 1 $\frac{3}{4}$ inches deep, 3 top, center 5 $\frac{1}{16}$ inches wide, 1 $\frac{3}{4}$ inches deep, Three 29 $\frac{1}{16}$ inches wide: two 1 $\frac{5}{8}$ inches deep, one 2 $\frac{1}{2}$ inches deep.

ORDERING INFORMATION:

9 GT 65259N—Shipping weight 132 pounds..... \$249.99

(14) 10-drawer Cabinet

CONSTR: Red enamel-finished cabinet and gray enamel-finished drawers. See other features top of this and opposite page.

OVERALL SIZE: 34x18x41 $\frac{1}{4}$ inches high.

DRAWERS: 27 $\frac{1}{8}$ inches wide, 16 $\frac{3}{4}$ in. front to back: four 1 $\frac{1}{4}$ in. deep, five 2 $\frac{1}{8}$ in. deep and one 6 $\frac{1}{4}$ in. deep.

ORDERING INFO: Shpg. wt. 184 lbs.

9 GT 65041N \$339.99



COMPK
DLAEGJ

Sears 139

New at Sears... CRAFTSMAN® 10-inch Motorized Miter Box

Motor develops 1½ HP with no-load speed of 5500 rpm to crosscut stock up to 27/16 inches thick and 5½ inches wide... double insulation eliminates need for grounding

(A) Heavy-duty reinforced aluminum head and motor assembly remains rigid for precise cross and miter cuts even when cutting thru heavy stock

(B) Trigger switch operates electric brake that automatically stops blade seconds after switch is released

(C) See-thru blade guards let you view workpiece clearly

(D) Slotted miter table moves along with blade angle so table is never cut... no need to replace table top

*Sears * Best*

YOU CAN DO IT

... with this 10-in. CRAFTSMAN Motorized Miter Box. Rough or finish cut most types of stock. Obtain quick, precise crosscuts and miters with a single downward stroke. You'll be surprised at what you can do with your CRAFTSMAN Motorized Miter Box. All you need is a little know-how and you can do it!



Cut heavy stock including 2x4's and 2x6's



Cut molding to precise angles for proper fit



Cut all types of plastic pipe



Cut thin-wall aluminum with optional blade

\$189⁹⁵

(E) Easy-to-read scale calibrated to ½° and pivot handle with pushbutton lock allow fast, accurate miter settings. Quick-release lever and positive stops at 0°, 45° right and left permit fast indexing

In addition to these great features, we back our miter box with a Full One Year Warranty... see details below

Leg Set for Motorized Miter Box
\$32⁹⁹

USES: Compact enough for home craftsmen, rugged enough for building tradesman. Perfect for on-the-job cutting of wood, composition and plastic. It even cuts thin-wall aluminum with blade (9 GT 32019) sold separately on page 29.

MOTOR: Develops 1½ HP. No-load speed of 5500 rpm. 100% ball and needle bearings for smooth operation and long life. Electric brake automatically stops blade after trigger switch is released.

CUTTING BLADE. CAPACITIES: 10-inch Kromedge® blade with 5/8-inch arbor. Blade locks at any angle between 47½° right and left to compensate for existing out of square corners. Quick-release miter lock, coupled with positive stops at 0°, 45° right and left, permits fast indexing. Crosscut stock up to 5½x27/16 in. thick at 0°, miter stock up to 3¾x27/16 in. thick at 45°; bevel stock up to 1½x3¾ in. thick on edge.

CONSTR: Aluminum. Reinforced head, motor assembly with positive-return spring. Thermoset motor housing. Thermoplastic handle. See-thru plastic blade guards. Slotted table rotates to stay in line with blade. Table 5¾x20¼ in. wide. Incl. wrench, instr.

ELECTRICAL INFO: Double insulated. 115-120-volt, 60-Hertz AC. 1260 watts. UL listed, meets "UL Standard 987 for Safety". 6-foot, 2-wire neoprene cord.

ORDERING INFORMATION: See warranty at right. Order safety goggles sold on page 57.

9 GT 2373L—Shipping weight 47 lbs. \$189.95

Steel Leg Set. Steel with rubber-padded leveling feet. Fits 9-2373, former 9-2375.

ORDERING INFORMATION: Shipped unassembled.

9 GT 22246C—Shipping weight 30 lbs. \$32.99

FULL ONE YEAR WARRANTY ON CRAFTSMAN MOTORIZED MITER BOX: If, within one year from the date of purchase, this Craftsman Motorized Miter Box fails due to a defect in material or workmanship, Sears will repair it, free of charge. Warranty service is available by simply contacting the nearest Sears store or Service Center throughout the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

SEARS, ROEBUCK AND CO.

F7495 COMPBKDAEGJL RF9-83164